

Micro Commercial Components

Micro Commercial Components 20736 Marilla Street Chatsworth CA 91311

Phone: (818) 701-4933 Fax: (818) 701-4939

1N34A

Features

- Low Leakage Current
- Low Junction Capacitance
- High Mechanical Strength
- Marking: Green cathode band
- Lead Free Finish/RoHS Compliant(Note 1) ("P" Suffix designates RoHS Compliant. See ordering information)

Germanium Diode 65 Volt


Maximum Ratings

- Operating Temperature: -65°C to +75°C
- Storage Temperature: -65°C to +75°C

Electrical Characteristics @ 25°C Unless Otherwise Specified

Peak Inverse Voltage	PIV	65V	I _R =1.0mA
Average Rectified	lo	50mA	
Current			
Peak Forward Surge	I _{FSM}	500mA	8.3ms, half sine
Current			
Maximum			
Instantaneous	V_{F}	1.00V	$I_{FM} = 5.0 \text{mA};$
Forward Voltage			$T_{J} = 25^{\circ}C^{*}$
Maximum Reverse			$T_A = 25^{\circ}C$
Current	I_R	30uA	V _R =10V
		500uA	V _R =50V
Typical Junction	C_{J}	0.8pF	Measured at
Capacitance			1.0MHz, V _R =0V

Notes:1.Lead in Glass Exemption Applied, see EU Directive Annex 5. 2.Pulse test: Pulse width 300 usec, Dutycycle 2%

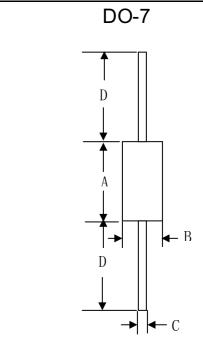

DIMENSIONS						
	INCHES		MM			
DIM	MIN	MAX	MIN	MAX	NOTE	
Α		.300		7.62		
В		.107		2.72	Ø	
С	.018	.022	0.46	0.56	Ø	
D	1.000		25.40			



Ordering Information

Device	Packing
(Part Number)-TP	Tape&Reel5Kpcs/Reel

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes.
Micro Commercial Components Corp. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Micro Commercial Components Corp. and all the companies whose products are represented on our website, harmless against all damages.

APPLICATIONS DISCLAIMER

Products offer by *Micro Commercial Components Corp* . are not intended for use in Medical,

Aerospace or Military Applications.