

Micro Commercial Components



Micro Commercial Components 20736 Marilla Street Chatsworth

CA 91311

Phone: (818) 701-4933 (818) 701-4939 Fax:

BAW156

Features

- Halogen free available upon request by adding suffix "-HF"
- Low leakage current: typ. 3pA
- Switching time: typ. 0.8s
- Continuous reverse voltage:max.75V
- Repetitive peak reverse voltage:max.85V Repetitive peak forward current: max. 500mA.
- Lead Free Finish/Rohs Compliant ("P"Suffix designates RoHS Compliant. See ordering information)
- Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1

Pin Configuration Top View

Marking:JZ




Maximum Ratings


- Opearting Temperature Range: -65°C to+150°C
- Storage Temperature Range: -65°C to +150°C


Electrical Characteristics @ 25°C Unless Otherwise Specified

Reverse Voltage	V_R	75V	
Peak Forward Current	I _{FM}	160mA	
Power Dissipation	P_d	250mW	
Maximum		900mV	$I_{FM} = 1mA;$
Instantaneous Forward	V_{F}	1000mV	I _{FM} = 10mA
Voltage		1100mV	I _{FM} = 50mA
		1250mV	I _{FM} = 150mA
Maximum DC Reverse			
Current At Rated DC	I_R	5nA	V _R =75V
Blocking Voltage			
Diode Capacitance	C_D	3pF	Measured at
			1.0MHz, V _R =0V
Reverse Recovery Time	t _{rr}	3uS	I _F =IR=10mA
			R_L =100 Ω

250mW 75Volt s **Dual Switching Diode**








	INCHES		MM		
DIM	MIN	MAX	MIN	MAX	NOTE
Α	.110	.120	2.80	3.04	
В	.083	.104	2.10	2.64	
С	.047	.055	1.20	1.40	
D	.035	.041	.89	1.03	
Е	.070	.081	1.78	2.05	
F	.018	.024	.45	.60	
G	.0005	.0039	.013	.100	
Н	.035	.044	.89	1.12	
J	.003	.007	.085	.180	
K	.015	.020	.37	.51	

Suggested Solder Pad Layout



Micro Commercial Components


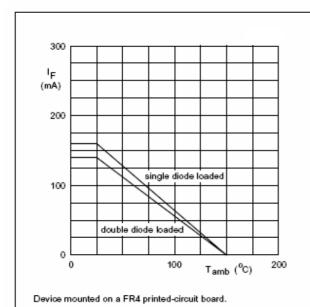


Fig.2 Maximum permissible continuous forward current as a function of ambient temperature.

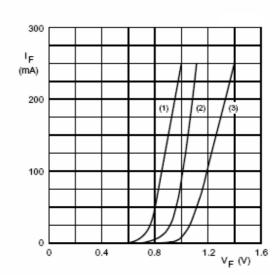

- (1) T_j = 150 °C; typical values.
- (2) T_i = 25 °C; typical values.
- (3) T_i = 25 °C; maximum values.

Fig.3 Forward current as a function of forward voltage; per diode.




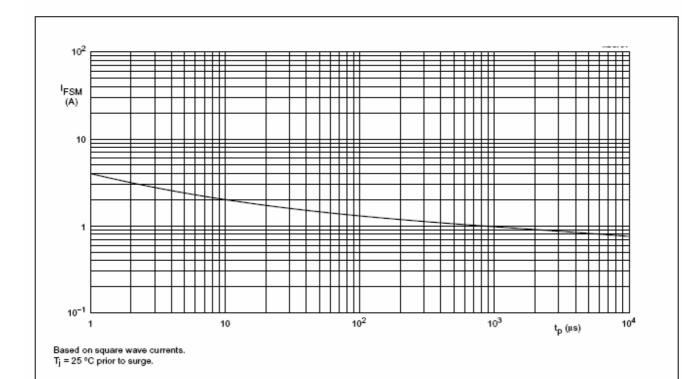


Fig.4 Maximum permissible non-repetitive peak forward current as a function of pulse duration per diode.



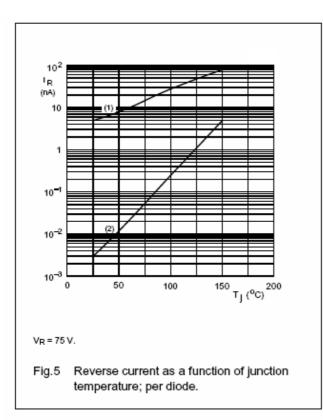

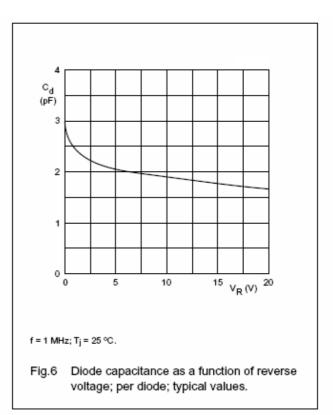

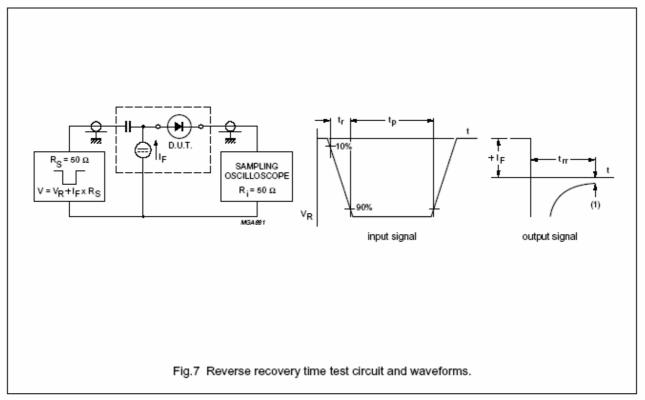



....portocom

Ordering Information:

Device	Packing
Part Number-TP	Tape&Reel: 3Kpcs/Reel

Note: Adding "-HF" suffix for halogen free, eg. Part Number-TP-HF

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. **Micro Commercial Components Corp.** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp.** and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

CUSTOMER AWARENESS

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.