


# Schottky PowerMod

## CPT20035 — CPT20050

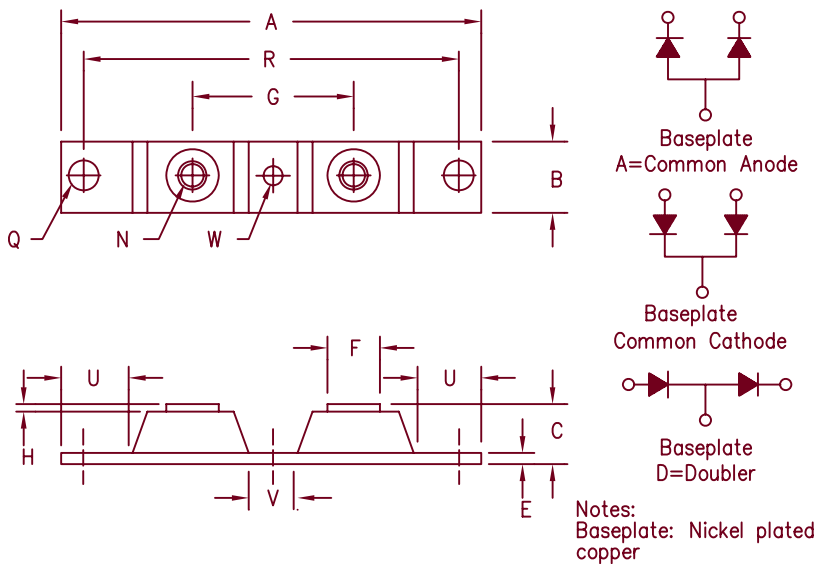

Dim.	Inches		Millimeters		Notes
	Min.	Max.	Min.	Max.	
A	---	3.630	---	92.20	
B	0.700	0.800	17.78	20.32	
C	---	0.630	---	16.00	
E	0.120	0.130	3.05	3.30	
F	0.490	0.510	12.45	12.95	
G	1.375 BSC		34.92 BSC		
H	0.010	---	0.25	---	
N	---	---	---	---	1/4-20
Q	0.275	0.290	6.99	7.37	Dia.
R	3.150 BSC		80.01 BSC		
U	0.600	---	15.24	---	
V	0.312	0.340	7.92	8.64	
W	0.180	0.195	4.57	4.95	Dia.

Microsemi Catalog Number	Industry Part Number	Working Peak Reverse Voltage	Repetitive Peak Reverse Voltage
CPT20035*	201CNQ035	35V	35V
CPT20040*	201CNQ040	40V	40V
CPT20045*	201CNQ045	45V	45V
	MBRP20045CT		
CPT20050*		50V	50V

\*Add Suffix A for Common Anode, D for Doubler

- Schottky Barrier Rectifier
- Guard Ring Protection
- Common Cathode Center Tap
- 200 Amperes/35 to 50 Volts
- 175°C Junction Temperature
- Reverse Energy Tested

### Electrical Characteristics

Average forward current per pkg	I <sub>F(AV)</sub> 200 Amps	T <sub>C</sub> = 143°C Square wave, R <sub>θJC</sub> = 0.25°C/W
Average forward current per leg	I <sub>F(AV)</sub> 100 Amps	T <sub>C</sub> = 143°C, Square wave, R <sub>θJC</sub> = 0.5°C/W
Maximum surge current per leg	I <sub>FSM</sub> 2000 Amps	8.3ms, half sine, T <sub>J</sub> = 175°C
Maximum repetitive reverse current per leg	I <sub>R(OV)</sub> 2 Amps	f = 1 KHZ, 25°C, 1 usec square wave
Max peak forward voltage per leg	V <sub>FM</sub> 0.80 Volts	I <sub>FM</sub> = 200A; T <sub>J</sub> = 25°C*
Max peak forward voltage per leg	V <sub>FM</sub> 0.60 Volts	I <sub>FM</sub> = 200A; T <sub>J</sub> = 175°C*
Max peak reverse current per leg	I <sub>RM</sub> 75mA	V <sub>RRM, T<sub>J</sub></sub> = 125°C*
Max peak reverse current per leg	I <sub>RM</sub> 4.0mA	V <sub>RRM, T<sub>J</sub></sub> = 25°C
Typical junction capacitance per leg	C <sub>J</sub> 4600pF	V <sub>R</sub> = 5.0V, T <sub>J</sub> = 25°C

\*Pulse test: Pulse width 300 μsec, Duty cycle 2%

### Thermal and Mechanical Characteristics

Storage temp range	T <sub>STG</sub>	-55°C to 175°C
Operation junction temp range	T <sub>J</sub>	-55°C to 175°C
Max thermal resistance per leg	R <sub>θJC</sub>	0.5°C/W Junction to case
Max thermal resistance per pkg	R <sub>θJC</sub>	0.25°C/W Junction to case
Typical thermal resistance (greased)	R <sub>θCS</sub>	0.08°C/W Case to sink
Terminal Torque		35-50 inch pounds
Mounting Base Torque (outside holes)		30-40 inch pounds
Mounting Base Torque (center hole)		8-10 inch pounds
center bolt must be torqued first		
Weight		2.8 ounces (75 grams) typical



SCOTTSDALE

8700 East Thomas Road, P.O. Box 1390  
Scottsdale, AZ 85252  
PH: (480) 941-6300  
FAX: (480) 947-1503  
www.microsemi.com

05-09-07 Rev. 3

# CPT20035 — CPT20050

Figure 1  
Typical Forward Characteristics — Per Leg

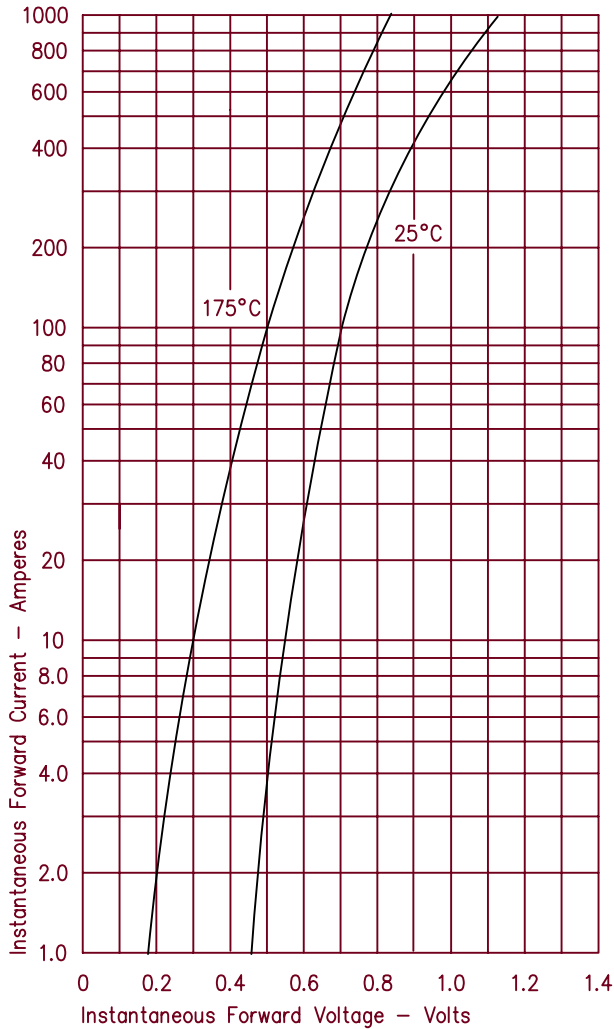


Figure 3  
Typical Junction Capacitance — Per Leg

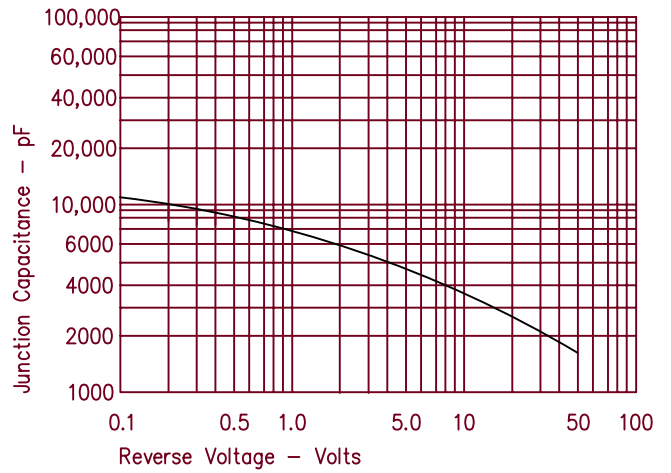


Figure 4  
Forward Current Derating — Per Leg

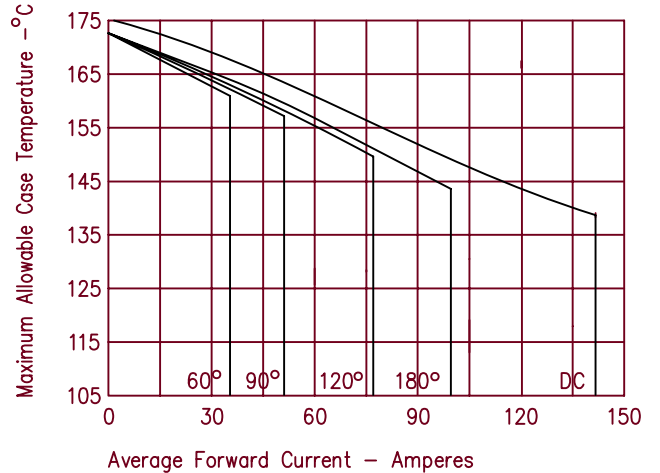


Figure 2  
Typical Reverse Characteristics — Per Leg

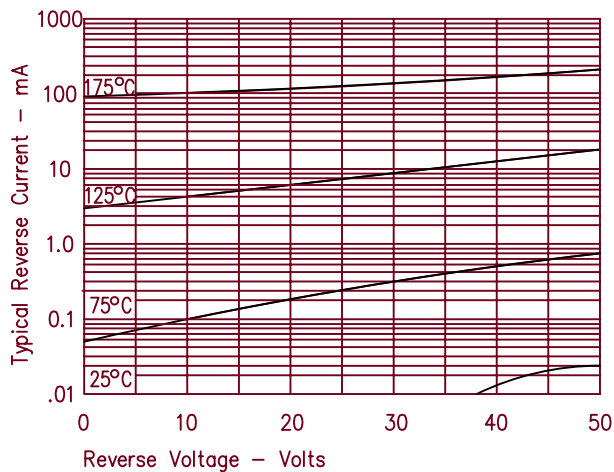


Figure 5  
Maximum Forward Power Dissipation — Per Leg

