

- **Features**
 - Input voltage: 90-305VAC
 - Built-in active PFC function: 0.99 Typ.
 - Low THD: 10% Typ.
 - High efficiency: 91% Typ.
 - IP67 design for indoor or outdoor installations
 - High surge immunity
 - Compliance to worldwide safety regulations for lighting
 - Suitable for dry/damp locations



Class 2

Note.4



■ **Specification**

Model		035	045	053	070	105	140	175	210	245	280	315	350	420	500		
(MU075HXXXAQ)																	
Input	Efficiency(110Vac)(Typ.) _{Note.1}	90%	90%	89%	89%	89%	88%	88%	87%	87%	86%	86%	85%	85%	84%		
	Efficiency(220Vac)(Typ.) _{Note.1}	91%	91%	90%	90%	90%	89%	89%	88%	88%	87%	87%	86%	86%	85%		
	Voltage Range (V) _{Note.2}	90 ~ 305Vac, OR 127~ 430Vdc (Derating may be need under low inputs, Refer to 'Derating Curve')															
	Voltage Rate (V) _{Note.2}	100Vac-277Vac															
	Frequency Range (Hz)	47~63															
	Power Factor(Typ.)		0.99 (Typ.) with 70%~100% load,at 110Vac														
			0.96 (Typ.) with 70%~100% load,at 220Vac														
			>0.9 with 75%~100% load,at 277Vac														
	THD(Typ.)		10% Typical, at 220Vac input, with 70%~100% load conditions														
			15% Typical, at 110/277Vac input, with 70%~100% load conditions														
AC Current(Typ.)	1A at 110VAC input, 0.5A at 220VAC																
Inrush Current(Max.)	at 230Vac input 25°C Cold Start (time wide=500uS, measured at 50% Ipeak,Not applicable for the inrush current to Noise Filter for less than 0.2																
Leakage Current(Max.)	0.75mA at 277Vac/60Hz																
Output	Voltage range (V)	107~214	83~166	71-142	54~108	36~72	27~54	21~43	18~36	15~31	13~27	12~24	10~20	9~18	7~15		
	Rated Current(mA)	350	450	530	700	1050	1400	1750	2100	2450	2800	3150	3500	4200	5000		
	Rated Power (W)	74.90	74.70	75.26	75.60	75.60	75.60	75.25	75.60	75.95	75.60	75.60	75.00	75.60	75.00		
	Ripple&Noise Current(Typ.)	≤30%((PK-AV) /AV) with LED default mode and full load)															
	Current Tolerance _{Note.5}	±5%															
	Line Regulation	±1%															
	Load Regulation	±3%															
	Current ADJ. Range	10% to 100%, continuously adjustable															
	Turn on delay Time	<1.5s, at 110Vac; <0.75s, at 220Vac															
Protection	Over Voltage(V)	217	180	146	112	76	57	46	39	34	30	27	23	21	18		
	Over Current	Protection type : Limit the output voltage , recovers automatically after fault condition is removed															
	Short Circuit	Protection type : constant current limiting, recovers automatically after fault condition is removed															
	Over temperature	Hiccup mode, recovers automatically after fault condition is removed. When the Tc of PSU rise to 110°C(Typ.), the PSU will shutdown The power supply should resume its normal operation when the inside temperature of PSU drop to normal temperature															
Environment	Operating Temp.	-40~+70°C(Refer to 'Derating Curve')															
	Tc	90°C max															
	Operating Humidity	20~95%RH															
	Storage Temp., Humidity	-40~+80°C , 10-95%RH															
	Temp. Coefficient	0.03%/°C (0~50°C)															
Vibration	10~500Hz, 5G 12min/cycle, period for 72min each along X, Y, Z axes																
Safety & EMC	Safety Standard	UL8750, UL1012,UL1310, CSA-C22.2 NO. 107.1,CSA-C22.2 NO. 223-M91, EN61347-1, EN61347-2-13															
	Withstand Voltage	I/P-O/P:3.75KVac, I/P-FG:1.875KV, O/P-FG:1.5KV															
	Isolation Resistance	I/P-O/P, I/P-FG, O/P-FG:100M Ohms/500Vdc/25°C/70%RH															
	EMC Emission	EN55015/FCC Part 15 Class B, EN61000-3-2 Class C, EN61000-3-3															
EMC Immunity	EN61000-4-2,3,4,5,6,8,11, EN61547 (Surge: L-N 4KV, L/N-Earth 6KV)																
UL Level	UL,CUL class 2						V	V	V	V	V	V	V	V	V		
	NON-UL, NON-CUL class 2	V	V	V	V	V											
Others	MTBF	300,000 Hours,measured at full load,25°C ambient temperature															
	Lifetime	50,000 Hours at Tc 75°C(Refer to"Life Time VS. Tcase (Ref.)")															
	Dimension	173 x 67.5 x 40 (mm) (LxWxH)															
	Weight	0.82kg															

Note.1: Measured at full load and steady-state temperature in 25°C ambient(Efficiency will be about 2% lower if measured immediately after startup); Note. 2: Derating may be needed under low to 'Derating Curve'; Note. 3: All parameters NOT specially mentioned are measured at 220VAC input , rated load and 25°C of ambient temperature; Note.4: see UL Level; Note.5: Includes set and load regulation.



subject to change without notice

Page 1 of 3


SHANGHAI MOONS' AUTOMATION CONTROL CO., LTD.

Add: No.168, Mingjia Road, Shanghai 201107, P.R.China
Tel: +86 (0)21 52634688 Website: www.moons.com.cn


Derating Curve

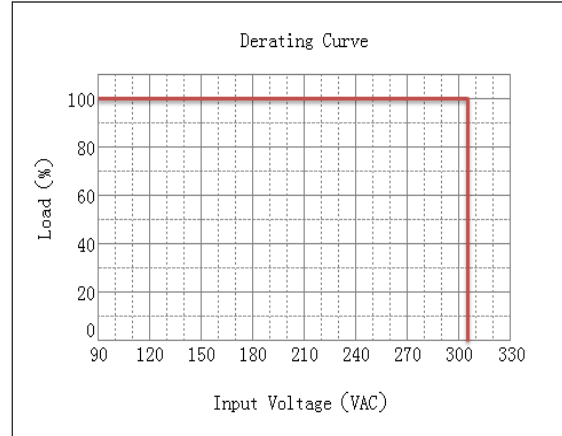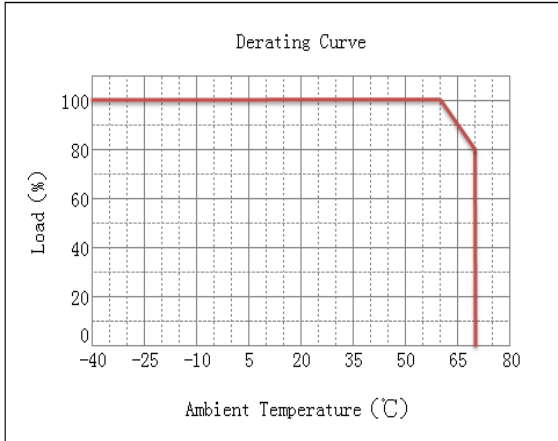


Power Factor VS. Load Curve

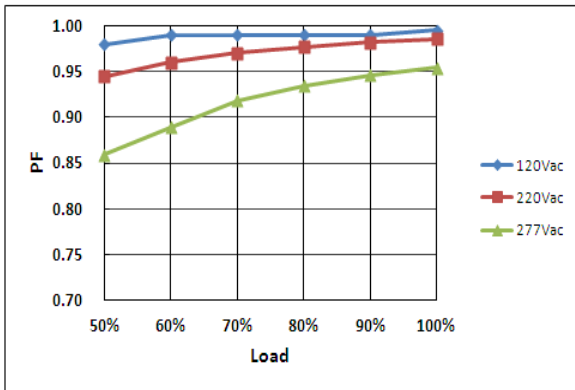


Efficiency VS. Load Curve

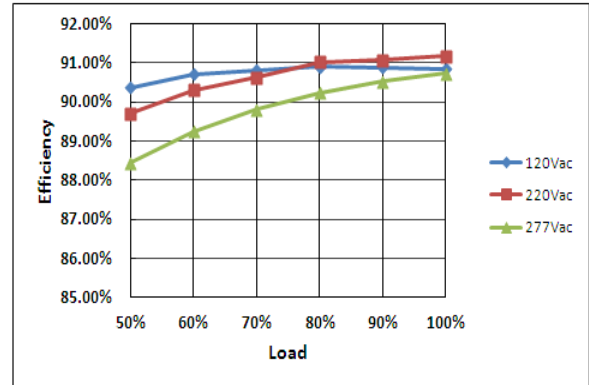

THD Curve

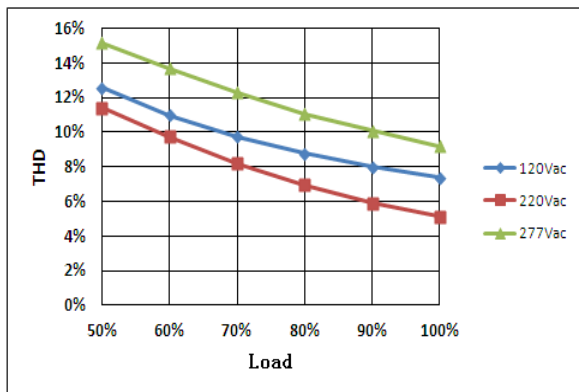


Life Time VS. Tcase (Ref.)

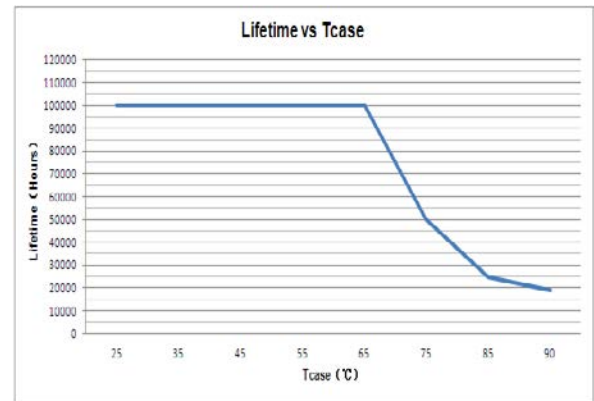

■ Mechanical Specification

1. Dimensions (Unit: mm)

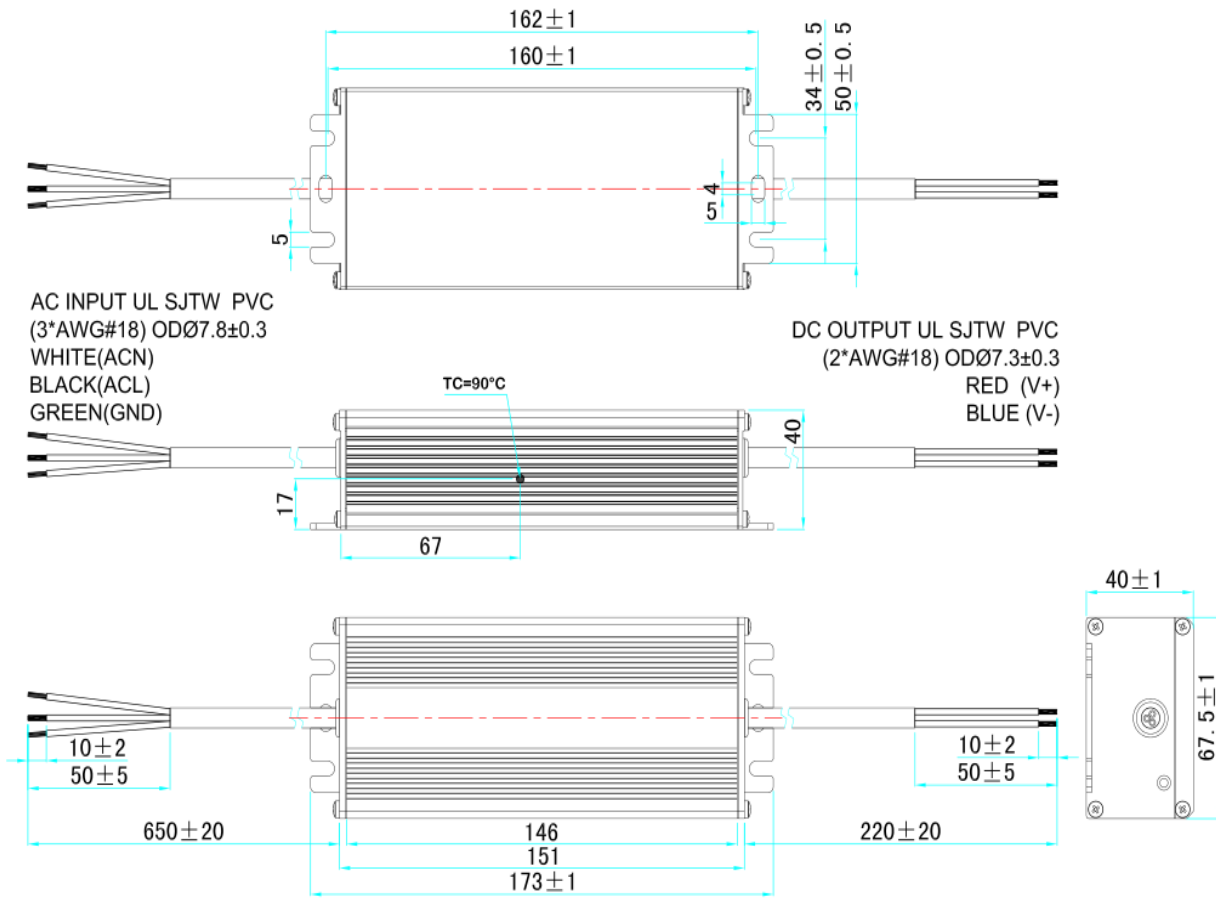

RoHS Compliance:

Our products comply with the European Directive 2002/95/EC, calling for the elimination of lead and other hazardous substances from electronic products.

2. Terminal wire Type

Products	AC Input			DC output		
	Wire Type	Assignment	Description	Wire Type	Assignment	Description
UL approval	UL SJTW PVC	BLACK/L	3*AWG#18	UL SJTW PVC	RED/+	2*AWG#18
		WHITE/N			BLUE/-	
		GREEN/G				