


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
6/19/09	A	DIM. 151.13 WAS 149.2 DIM. 118.11 WAS 116.32	T.B.	B.S.	
4/19/13	B	UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	
6/14/13	C	UPDATED TITLE	T.B.	B.S.	
06/30/17	D	DIM. 151.42 WAS 149.20 DIM. 57.48 WAS 56.60	T.B.	B.S.	

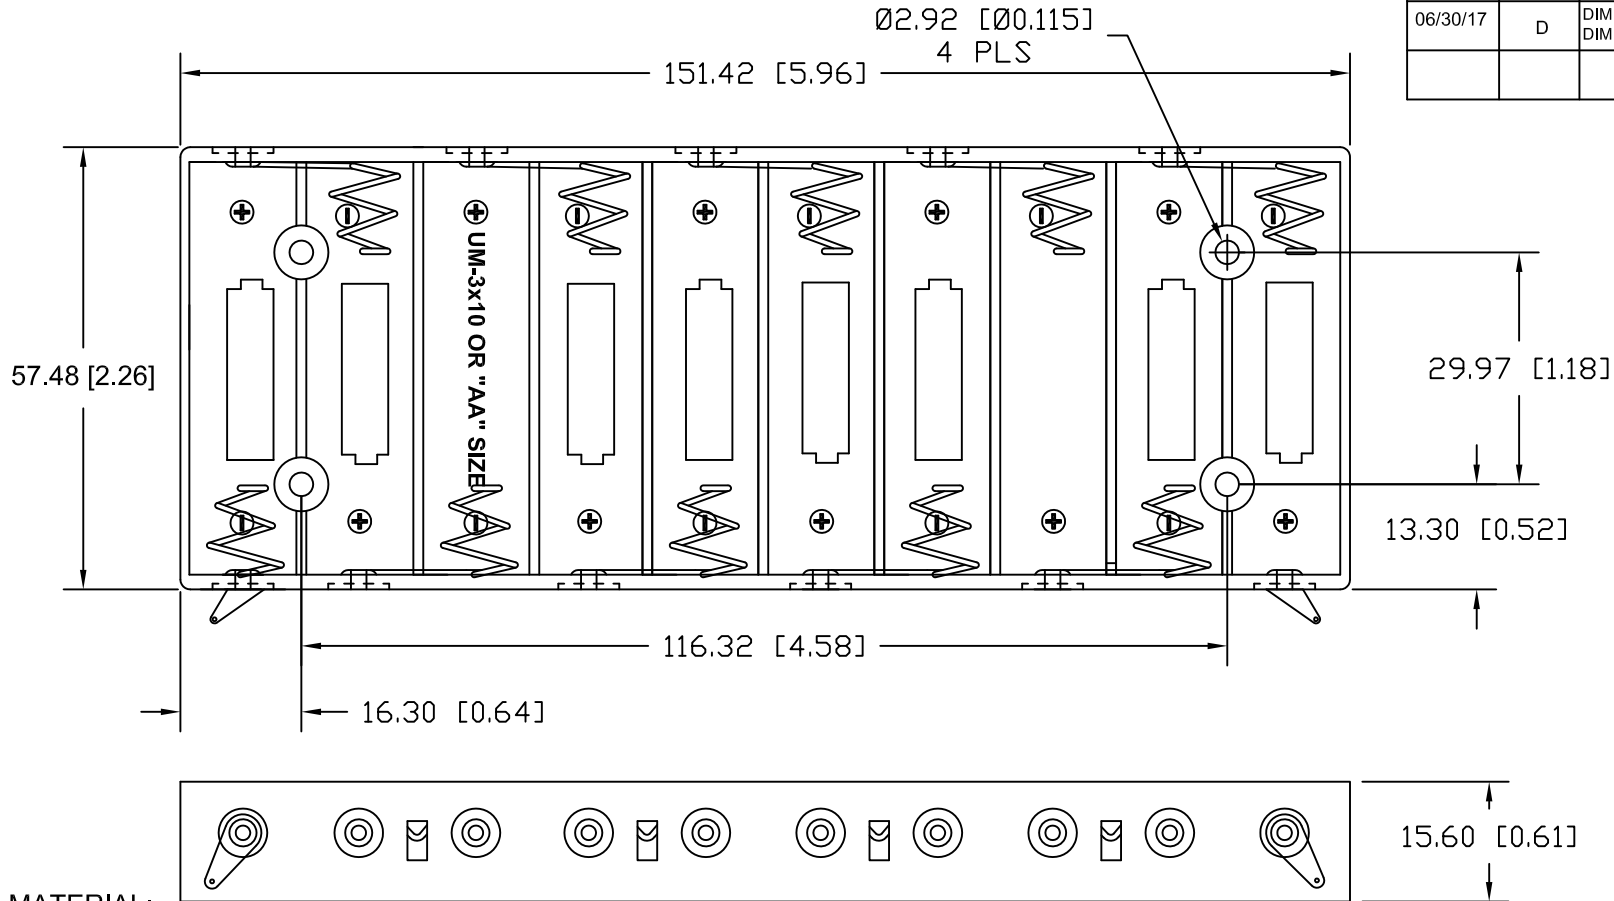


MATERIAL:

- HOUSING: POLYPROPYLENE, BLACK
- FLAMMABILITY RATING -UL94 HB, UL FILE NO. E216959
- TEMPERATURE RANGE: -10°C to +100°C
- SPRINGS: SPRING STEEL, NICKEL PLATED
- RIVETS: BRASS, NICKEL PLATED
- LUGS: BRASS, NICKEL PLATED
- CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS
PER EIA-540J000
- ROHS 2 COMPLIANT

MOUNTING INSTRUCTION:

USE 2-56 MACHINE SCREWS OR EYELETS 0.089" OD BY 0.15" FLANGE STIMPSON GS-3 SERIES OR EQUIVALENT. ALSO ADHESIVES AND DOUBLE SIDED TAPES WORK WELL.

Tolerance (Inches)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
Decimal ±.5 (.020)	Scale	Drawn By B.S.	
Fractional ±.8 (.030)	Title TEN "AA" CELL HOLDER WITH SOLDER LUGS		
Angular ± 3°	Date 06/30/17	Drawing Number BH10AAL	
		Approved By T.B.	