
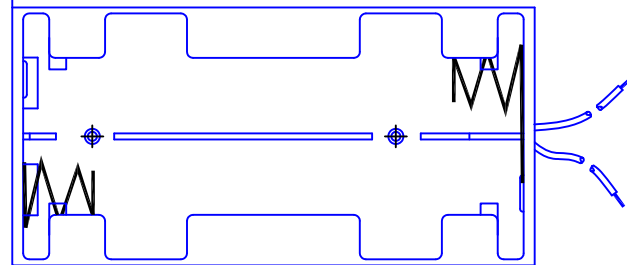
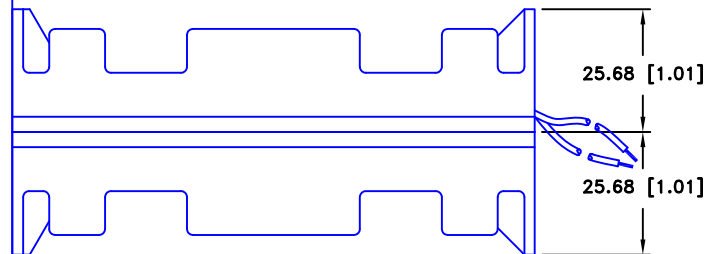
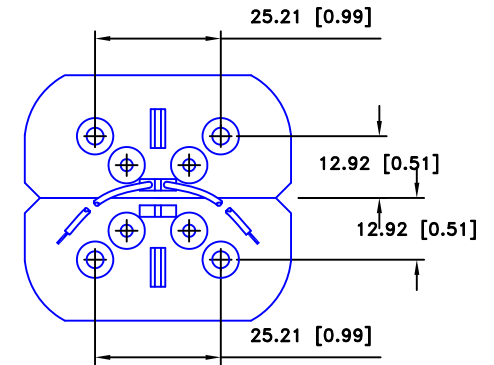
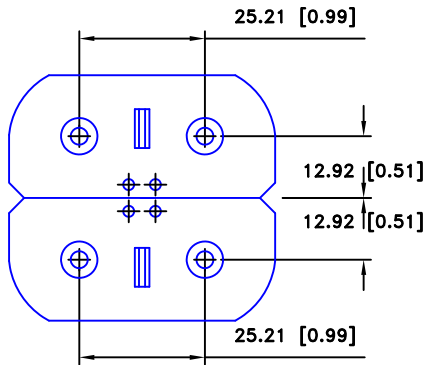



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
8/06/14	D	UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	
5/19/17	E	DIM. 25.21 WAS 26.29 DIM. 64.80 WAS 63.50 DIM. 1.84 WAS 3.18	T.B.	B.S.	

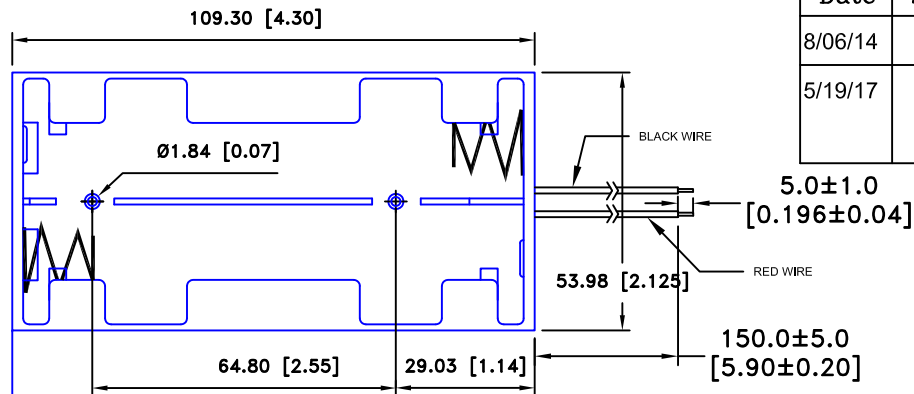

Wire Leads shown

SPECIFICATIONS

Plastic material - Polypropylene, PP-1040
 Flammability Rating -UL94-HB, UL File NO. E216959
 Temperature Range: -10°C to +100°C
 Springs - Nickel Plated Spring Steel
 Wire - 26 AWG, UL1007, CSA, TR64, 300V, 80°C
 Rivets - Brass, Nickel Plated
 Contact Resistance: Under 50mΩ for +/- contacts per EIA-540J000
 ROHS 2 COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.5 (.020)		Scale 1=1	Drawn By T.S. Approved By T.B.
Fractional ± .8 (.030)	Title EIGHT "C" CELL HOLDER WITH 6" WIRE LEADS		
Angular ± 3°	Date 5/19/17	Drawing Number BH28CW	