



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
12/12/14	A	REDRAWN IN AUTOCAD UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	
08/14/15	B	UPDATED NOTES	T.B.	B.S.	
08/21/15	C	DIM. 4.50 WAS 4.0 DIM. 6.0 WAS 5.50 REMOVED DIM. 45.40, 18.50, 13.10 ADDED DIM. 33.25	T.B.	B.S.	

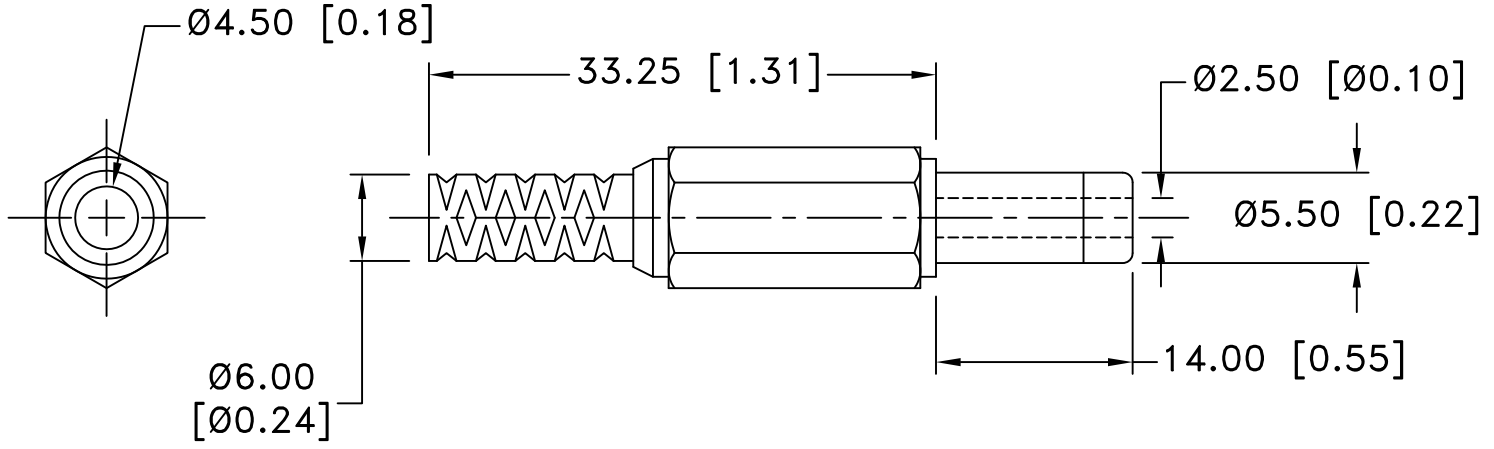

NOTES:
 MAX. RATING: 12V 5A.
 MATERIAL:
 1) INSULATOR: ABS
 2) PLUG: BRASS, NICKEL PLATED
 3) COVER: PP
 DIELECTRIC STRENGTH: AC 500C/1MIN.
 INSULATION RESISTANCE: DC 500V/100MΩ
 ROHS 2 COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By B.S.
			Approved By T.B.
decimal ±.5 (.020)	Title DC PLUG- 2.5mm MOLDED WITH STRAIN RELIEF	Date 08/21/15	
Fractional ± .8 (.030)		Drawing Number EP502-B	
Angular ± 3°			