muRata   Capacitor Data Sheet     GRM21BZ71E106KE15#   "#" indicates a package specification code.					
In Production General 125 Cmax. Reflow Flow OK REACH 1					
< List of part numbers with package codes > GRM21BZ71E106KE15L ,GRM21BZ71E106KE15K					
Shape		Note	25		
		Range of capacitance change rate is specified with 50% of rated voltage     Derating1     References     Packaging   Specifications			
		L K	φ180mm Embossed taping φ330mm Embossed taping	3000	
L size	2.0 ±0.2mm			10000	
Wsize	1.25 ±0.2mm	Mass (typ.)			
T size	1.25 ±0.2mm	1 piece	1 piece 23.0mg		
External terminal width e	0.2 to 0.7mm	φ180mm	φ180mm Reel 118g		
Distance between external terminals g	0.7mm min.				

## Specifications

Size code in inch(mm)


Capacitance	10µF±10%
Rated voltage	25Vdc
Temperature characteristics (complied standard)	X7R(MURATA)
Capacitance change rate	±15.0%
Temperature range of temperature characteristics	-55 to 125°C
Operating temperature range	-55 to 125°C

0805 (2012M)

## \rm Attention

muRata

 This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
This datasheet has only typical specifications because there is no space for detailed specifications.
Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

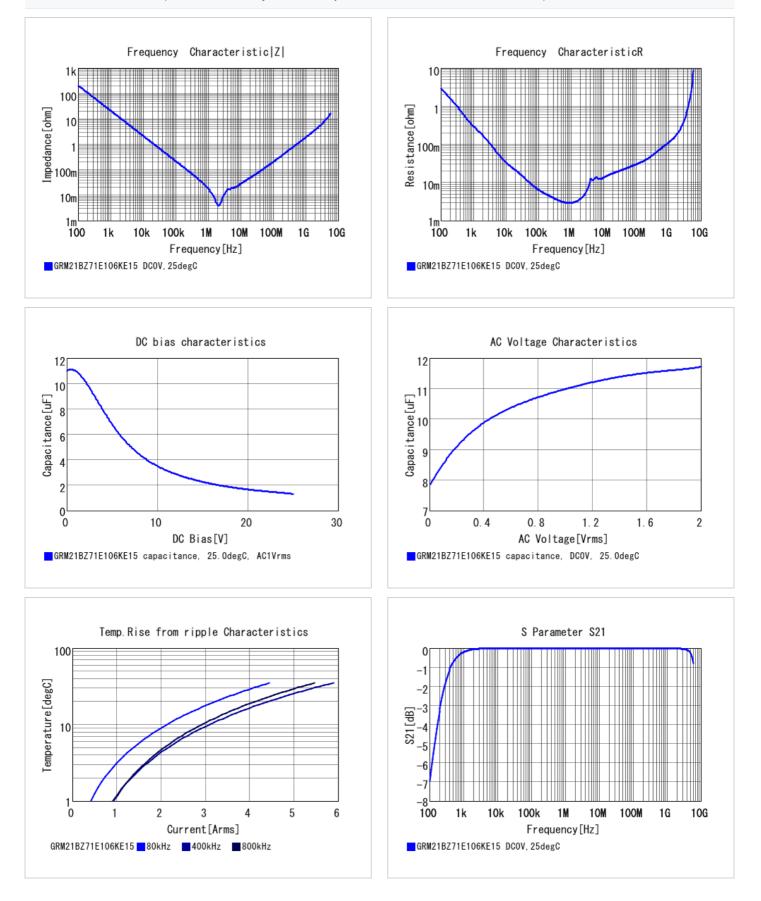

2 of 2

## 🔔 Attention

 This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.