

ID Sensor Modules

CJ1W-V600C11/V600C12
CS1W-V600C11/V600C12

Integrate Supply Chain Management with Work-in-Process Data Collection by RFID on the PLC Rack

- These Modules can be combined with OMRON's comprehensive lineup of PLC Modules to create the optimum system.
- Operations are the same for Single-head and Double-head Units, enabling effective reuse of ladder programs.
- A simple test function allows communications status to be checked without any special programming in the CPU to greatly speed up the system startup.
- Maintenance is greatly simplified by a power supply failure flag and a monitoring function for communications turnaround time and error code



Ordering Information

■ List of Models

Item	Description		Model	
ID Sensor Module	SYSMAC CJ1-series PLCs	Single-head		CJ1W-V600C11
		Double-head		CJ1W-V600C12
	SYSMAC CS1-series PLCs	Single-head		CS1W-V600C11
		Double-head		CS1W-V600C12

Specifications

■ General Specifications


Item	Model	CJ1W-V600C11	CJ1W-V600C12	CS1W-V600C11	CS1W-V600C12
Applicable PLC		CJ1 Series		CS1 Series	
Unit classification		Special I/O Modules			
Compatible RFID System		V600 Series			
Ambient operating temperature		0 to 55°C			
Storage temperature		-20 to 75°C			
Ambient operating humidity		10% to 90% (with no condensation)			
Vibration/shock resistance		Conforms to CJ1 Series.		Conforms to CS1 Series.	
External power supply		Not required.			24 VDC +10%/–15%
Current consumption	5 V	0.26 A	0.32 A	0.26 A	0.32 A
	24 V	0.12 A	0.24 A	---	---
	26 V	---	---	0.12 A	0 A (Not used.)
	External	---	---	---	0.36 A
Weight		Approx. 120 g	Approx. 130 g	Approx. 180 g	Approx. 300 g
Applicable standards		UL, CE (EMS: EN61000-6-2, EMI: EN50081-2)			

■ Performance Specifications

Model	CJ1W-V600C11	CJ1W-V600C12	CS1W-V600C11	CS1W-V600C12
Item				
Unit number	0 to 95	0 to 94	0 to 95	0 to 94
Word allocation	10 words	20 words	10 words	20 words
Mounting position	CJ1 CPU Rack or Expansion Rack		CS1 CPU Rack or Expansion Rack/Long-distance Expansion Rack (The Modules cannot be mounted to C200H I/O Expansion Racks or Remote I/O Slave Racks.)	
Number of mountable Units	The actual number of Modules that can be mounted depends on the number of Modules and their respective consumption currents. (Refer to data on current consumptions in the operation manual for the relevant CPU) The maximum number of ID Sensor Modules (without any other Modules that can be mounted per Rack is as follows: CJ1W-V600C11: 4 per Rack CJ1W-V600C12: 2 per Rack CS1W-V600C11: 5 per Rack CS1W-V600C12: 10 per Rack (no restrictions) The power supply for the CJ1W-V600C11/V600C12 is the CJ1W-PA205R.			
Communications control method	Controlled using the Special I/O Module Area.			
Data transfer speed	Up to 2,048 bytes of data can be transferred at 160 bytes/scan (between the CPU and the ID Sensor Module)			
Compatible RFID System	V600 Series			
Possible number of R/W Heads	1 R/W Head	2 R/W Heads	1 R/W Head	2 R/W Heads
Commands (Figures in parentheses indicate the number of bytes that can be specified.)	Read/Write (1 to 2048) Data Fill (1 to 2048 or the last address) Copy (Double-head models only) (1 to 2048) Calculation Write (1 to 4) Bit Set/Bit Clear (1 to 4) Mask Bit Write (2) Data Check (2) Number of Writes Control (3)			
Communications processing time (See note.)	Command	Data Carrier with built-in battery	Battery-less Data Carrier (time priority mode)	
	Read	$1.8 \times N + 48.4$	$1.8 \times N + 79.0$	
	Write (with verify setting)	$4.2 \times N + 86.5$	$7.1 \times N + 180.4$	
	Write (without verify setting)	$2.2 \times N + 72.8$	$4.3 \times N + 132$	
Maintenance functions	Communications test function, processing result monitor function (communications TAT, error codes)			
Error detection functions	Detects CPU errors and errors in communications with the Data Carrier, and checks the power supply for the Head.			

Note: The command processing time can be calculated by adding the data transfer time to the communications processing time.





System Configuration

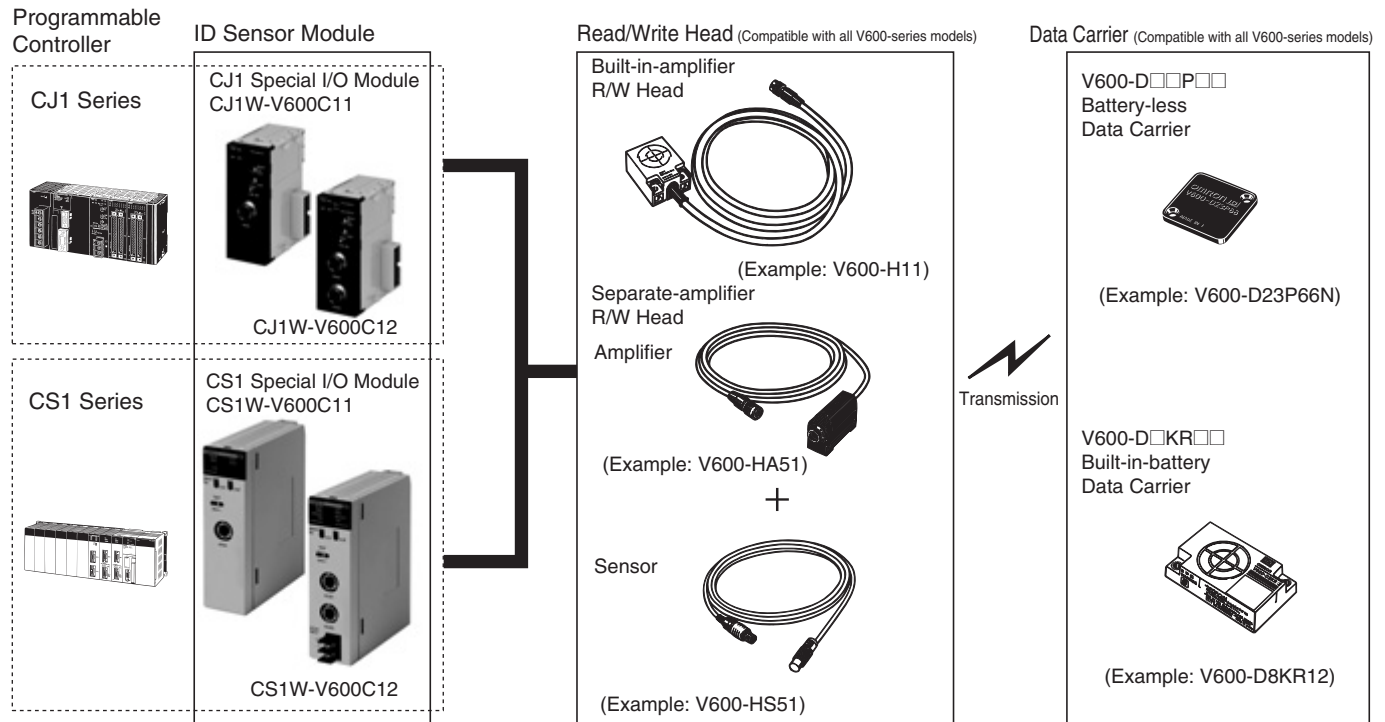

Note: For information related to Programmable Controller specifications, refer to the operation manual for relevant Programmable Controller.

Dimensions

Note: All units are in millimeters unless otherwise specified.

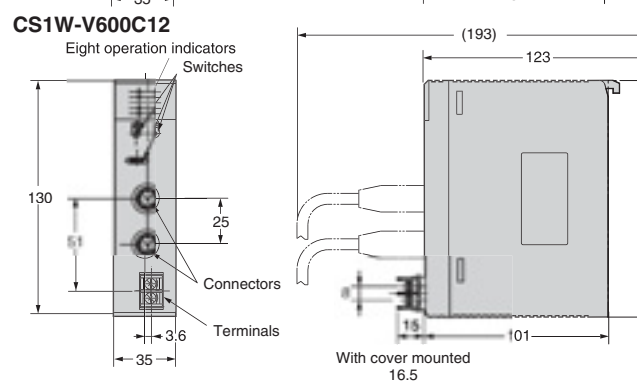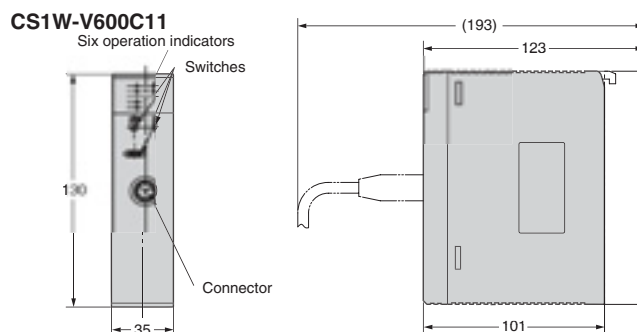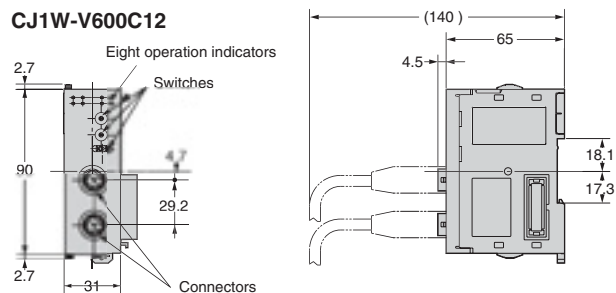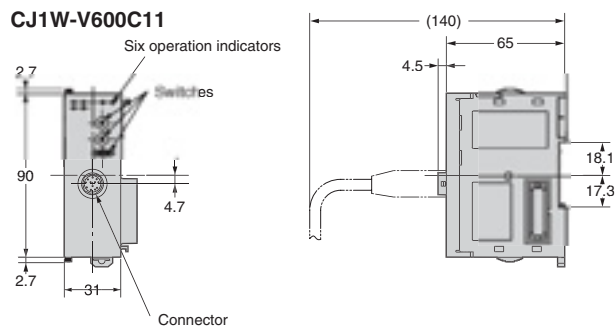

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.
 To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

Terms and Conditions

WARRANTY, LIMITATIONS OF LIABILITY

WARRANTY OMRON's exclusive warranty is that the products are free from defects in materials and workmanship for a period of one year (or other period if specified) from date of sale by OMRON.

OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, REGARDING NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR PARTICULAR PURPOSE OF THE PRODUCTS. ANY BUYER OR USER ACKNOWLEDGES THAT IT ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE. OMRON DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED.

LIMITATIONS OF LIABILITY OMRON SHALL NOT BE RESPONSIBLE FOR SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED ON CONTRACT, WARRANTY, NEGLIGENCE OR STRICT LIABILITY.

In no event shall responsibility of OMRON for any act exceed the individual price of the product on which liability is asserted.

IN NO EVENT SHALL OMRON BE RESPONSIBLE FOR WARRANTY, REPAIR OR OTHER CLAIMS REGARDING THE PRODUCTS UNLESS OMRON'S ANALYSIS CONFIRMS THAT THE PRODUCTS WERE PROPERLY HANDLED, STORED, INSTALLED AND MAINTAINED AND NOT SUBJECT TO CONTAMINATION, ABUSE, MISUSE, OR INAPPROPRIATE MODIFICATION OR REPAIR.

APPLICATION CONSIDERATIONS

SUITABILITY FOR USE OMRON shall not be responsible for conformity with any standards, codes or regulations which apply to the combination of the product in the customer's application or use of the product.

At the customer's request, OMRON will provide applicable third party certification documents identifying ratings and limitations of use which apply to the product. This information by itself is not sufficient for a complete determination of the suitability of the product in combination with the end product, machine, system, or other application or use.

The following are some examples of applications for which particular attention must be given. This is not intended to be an exhaustive list

of all possible uses of this product, nor is it intended to imply that the uses listed may be suitable for this product:

- Outdoor use, uses involving potential chemical contamination or electrical interference, or conditions or uses not described in this catalog.
- Nuclear energy control systems, combustion systems, railroad systems, aviation systems, medical equipment, amusement machines, vehicles, safety equipment, and installations subject to separate industry or government regulations.
- Systems, machines and equipment that could present a risk to life or property.

Please know and observe all prohibitions of use applicable to this product.

NEVER USE THE PRODUCT FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

PROGRAMMABLE PRODUCTS OMRON shall not be responsible for the user's programming of a programmable product, or any consequence thereof.

DISCLAIMERS

PERFORMANCE DATA Performance data given in this catalog is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of OMRON's test conditions, and the user must correlate it to actual application requirements. Actual performance is subject to the OMRON Warranty and Limitations of Liability.

CHANGE IN SPECIFICATIONS Product specifications and accessories may be changed at any time based on improvements and other reasons. It is our practice to change part numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the product may be changed without any notice. When in doubt, special part numbers may be assigned to fix or establish key specifications for your application. Please consult with your OMRON representative at any time to confirm actual specifications of purchased product.

ERRORS AND OMISSIONS The information in this catalog has been carefully checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical or proofreading errors, or omissions.

Complete terms and conditions for product purchase and use are on Omron's website at www.omron.com/oei – under the "About Us" tab, in the Legal Matters section.

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS. To convert millimeters into inches, divide by 25.4

OMRON®

OMRON ELECTRONICS LLC

One Commerce Drive
Schaumburg, IL 60173

847-843-7900

For US technical support or other inquiries:

800-556-6766

OMRON CANADA, INC.

885 Milner Avenue
Toronto, Ontario M1B 5V8

416-286-6465

OMRON ON-LINE

Global - <http://www.omron.com>
USA - <http://www.omron.com/oei>
Canada - <http://www.omron.ca>