

G3VM-61HR/61HR1/61HR2

MOS FET Relays SOP 6-pin, High-current and Low-ON-resistance Type

MOS FET Relays in SOP 6-pin packages that achieve the low ON resistance and high switching capacitance of a mechanical relay

- Load voltage: 60 V
- 60-V Relay (61HR): Continuous load current of 2.3 A (4.6 A) max. *
- 60-V Relay (61HR1): Continuous load current of 3.3 A (6.6 A) max. *
- 60-V Relay (61HR2): Continuous load current of 4 A (8 A) max. *

* Values in parentheses are for connection C.



Note: The actual product is marked differently from the image shown here.

RoHS Compliant


Application Examples

- Semiconductor test equipment
- Security equipment
- Amusement equipment
- Communication equipment
- Industrial equipment
- Test & Measurement equipment
- Power circuit

Package

(Unit : mm, Average)

SOP 6-pin



Note: The actual product is marked differently from the image shown here.

Model Number Legend

G3VM-□□□□□
1 2 3 4 5

- 1. Load Voltage**
6 : 60 V
- 2. Contact form**
1 : 1a (SPST-NO)
- 3. Package**
H : SOP 6-pin
- 4. Additional functions**
R: Low ON resistance
- 5. Other informations**
When specifications overlap, serial code is added in the recorded order.

Ordering Information

Package	Contact form	Terminals	Load voltage (peak value) *	Continuous load current (peak value) *		Stick packaging		Tape packaging	
				Connection A, B	Connection C	Model	Minimum package quantity	Model	Minimum package quantity
SOP6	1a (SPST-NO)	Surface-mounting Terminals	60 V	2.3 A	4.6 A	G3VM-61HR	75	G3VM-61HR(TR)	2,500
				3.3 A	6.6 A	G3VM-61HR1		G3VM-61HR1(TR05)	
				4 A	8 A	G3VM-61HR2		G3VM-61HR2(TR05)	

* The AC peak and DC value are given for the load voltage and continuous load current.


Note: To order tape packaging for Relays with surface-mounting terminals, add "(TR)" or "(TR05)" to the end of the model number.

Absolute Maximum Ratings (Ta = 25°C)

Item		Symbol	G3VM-61HR	G3VM-61HR1	G3VM-61HR2	Unit	Measurement conditions	
Input	LED forward current	IF	30			mA		
	LED forward current reduction rate	$\Delta I_F/^\circ\text{C}$	-0.3			mA/°C	Ta ≥ 25°C	
	LED reverse voltage	VR	5		6	V		
Connection temperature		TJ	125			°C		
Load voltage (AC peak/DC)		VOFF	60			V		
Output	Continuous load current	Connection A	Io	2300	3300	4000	mA	Connection A: AC peak/DC Connection B and C: DC
		Connection B		4600	6600	8000		
		Connection C						
	ON current reduction rate	Connection A	$\Delta I_o/^\circ\text{C}$	-30.7	-33	-40	mA/°C	G3VM-61HR: Ta ≥ 50°C G3VM-61HR1/61HR2: Ta ≥ 25°C
		Connection B		-61.3	-66	-80		
Connection C								
Pulse ON current		Iop	7	10	12	A	t=100 ms, Duty=1/10	
Connection temperature		TJ	125			°C		
Dielectric strength between I/O *		VI-o	1500			Vrms	AC for 1 min	
Ambient operating temperature		Ta	-40 to +85		-40 to +110	°C	With no icing or condensation	
Ambient storage temperature		Tstg	-55 to +125			°C		
Soldering temperature		-	260			°C	10 s	

* The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.


Connection Diagram

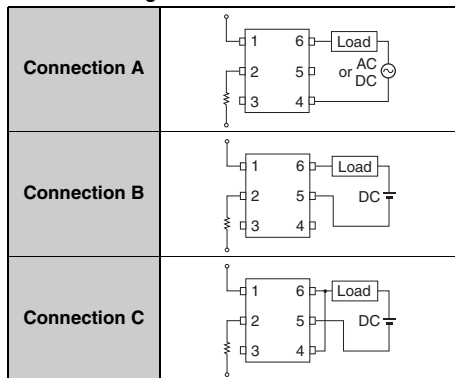

Electrical Characteristics (Ta = 25°C)

Item		Symbol		G3VM-61HR	G3VM-61HR1	G3VM-61HR2	Unit	Measurement conditions		
Input	LED forward voltage	VF	Minimum	1.18		1.50	V	IF=10 mA		
			Typical	1.33		1.65				
			Maximum	1.48		1.80				
	Reverse current	IR	Maximum	10			μA	VR=5 V		
	Capacitance between terminals	CT	Typical	70			pF	V=0, f=1 MHz		
Output	Trigger LED forward current	IFT	Typical	0.4	0.2	0.3	mA	G3VM-61HR : Io=100 mA G3VM-61HR1 : Io=2000 mA G3VM-61HR2 : Io=1000 mA		
			Maximum	3						
	Release LED forward current	IFC	Minimum	0.1			mA	IoFF=10 μA		
	Maximum resistance with output ON	RON	Typical		Connection A	0.04	0.03	0.028	Ω	G3VM-61HR2: IF=5 mA Io=4 A (Connection A, B) Io=8 A (C connections), t<1s Others: IF=5 mA Io=2 A (Connection A, B) Io=4 A (C connections), t<1s
					Connection B	0.02	0.015	0.014		
Connection C					0.01	0.008	0.007			
Connection A					0.07	0.06	0.04			
Connection B					0.04	-	0.02			
Connection C	-	-	0.01							
Current leakage when the relay is open	ILEAK	Typical	-			nA	VoFF= Load voltage ratings			
		Maximum	10	20	1000					
Capacitance between terminals	COFF	Typical	1000	700	750	pF	V=0, f=1 MHz			
		Maximum	-	1500	-					
Capacitance between I/O terminals	CI-O	Typical	0.8			pF	f=1 MHz, VS=0 V			
Insulation resistance between I/O terminals	RI-O	Minimum	1000			MΩ	VI-O=500 VDC, RoH≤60%			
		Typical	10 ⁸							
Turn-ON time	tON	Typical	1.0	0.6		ms	IF=5 mA, RL=200 Ω, VDD=20 V *			
		Maximum	5		2					
Turn-OFF time	tOFF	Typical	0.15	0.2	0.15	ms	IF=5 mA, RL=200 Ω, VDD=20 V *			
		Maximum	1		0.5					

* Turn-ON and Turn-OFF Times



Recommended Operating Conditions

For usage with high reliability, Recommended Operation Conditions is a measure that takes into account the derating of Absolute Maximum Ratings and Electrical Characteristics.

Each item on this list is an independent condition, so it is not simultaneously satisfy several conditions.


Item	Symbol		G3VM-61HR	G3VM-61HR1	G3VM-61HR2	Unit
Load voltage (AC peak/DC)	VDD	Maximum	60	48		V
		Minimum	5			
Operating LED forward current	IF	Typical	7.5	10		mA
		Maximum	20	25		
		Minimum	5			
Continuous load current (AC peak/DC)	Io	Maximum	1800	3300	4000	
Ambient operating temperature	Ta	Minimum	-20			°C
		Maximum	65		85	

Spacing and Insulation


Item	Minimum	Unit
Creepage distances	4.0	mm
Clearance distances	4.0	
Internal isolation thickness	0.1	

Engineering Data


LED forward current vs. Ambient temperature

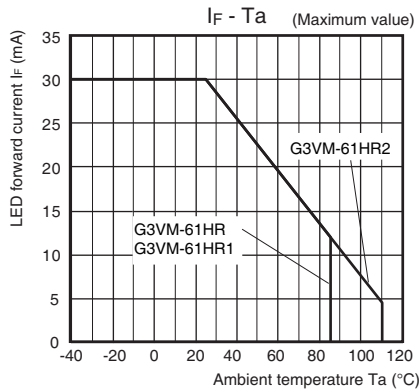


Continuous load current vs. Ambient temperature

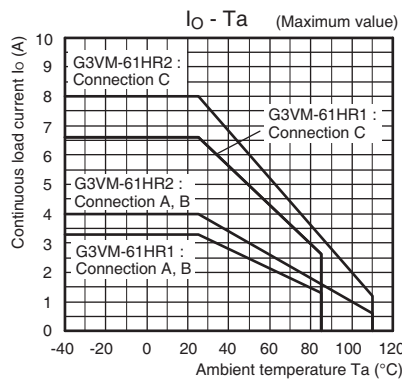


G3VM-61HR

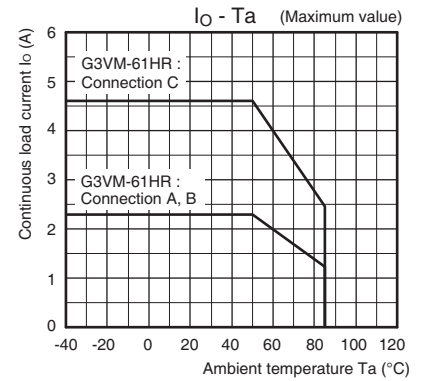


LED forward current vs. LED forward voltage

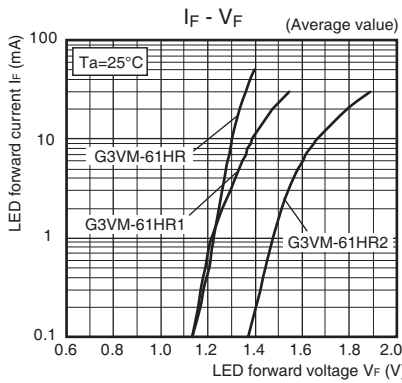


Continuous load current vs. On-state voltage

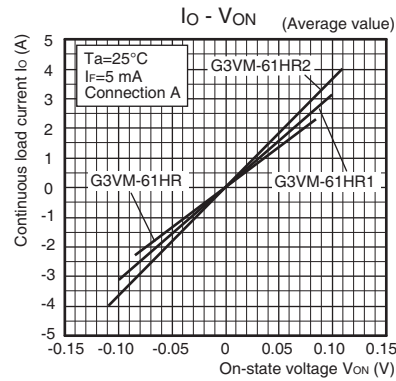


On-state resistance vs. Ambient temperature

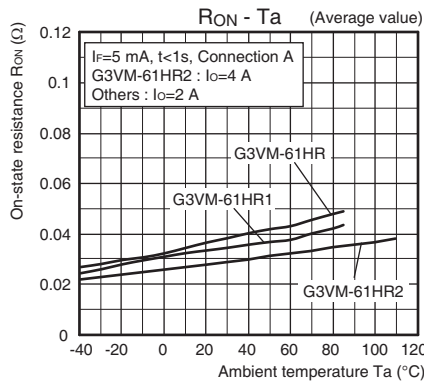

Trigger LED forward current vs. Ambient temperature

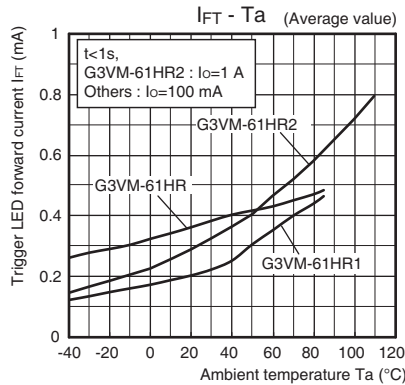


Turn ON, Turn OFF time vs. LED forward current

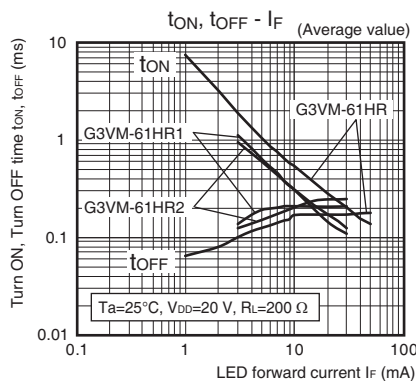


Engineering Data

● Turn ON, Turn OFF time vs. Ambient temperature

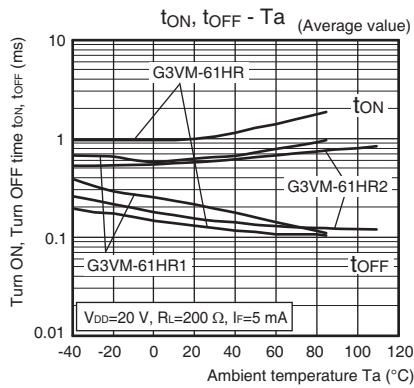


● Current leakage vs. Load voltage

G3VM-61HR/61HR2

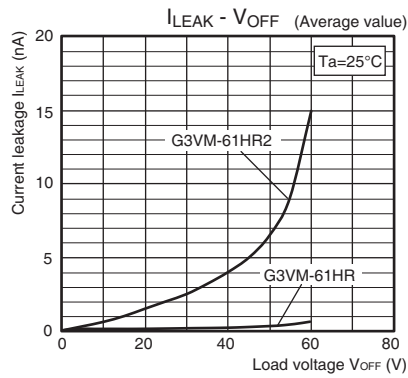


● Current leakage vs. Ambient temperature

G3VM-61HR1/61HR2

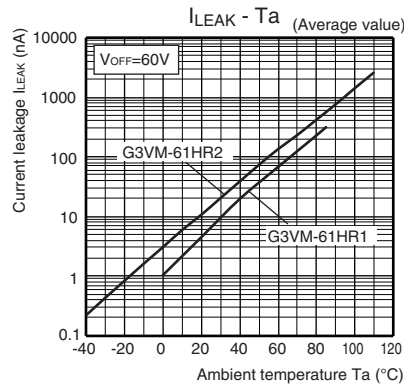

● Output terminal capacitance vs. Load voltage

G3VM-61HR/61HR2

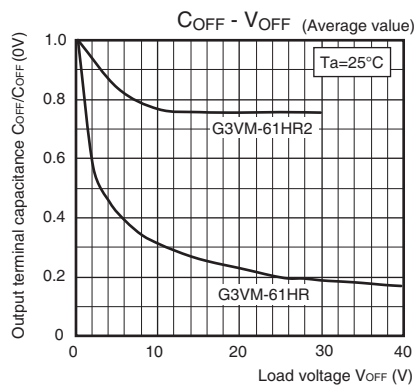


Appearance / Terminal Arrangement / Internal Connections

Appearance


SOP (Small Outline Package)

SOP 6-pin

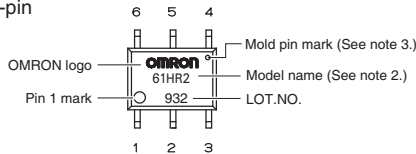


- Note: 1.** The actual product is marked differently from the image shown here.
Note: 2. "G3VM" does not appear in the model number on the Relay.
Note: 3. The indentation in the corner diagonally opposite from the pin 1 mark is from a pin on the mold.

Terminal Arrangement/Internal Connections (Top View)




Dimensions (Unit: mm)




Surface-mounting Terminals

Weight: 0.13 g

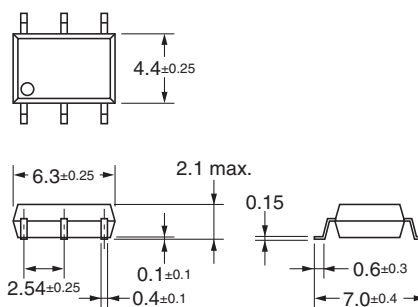

Actual Mounting Pad Dimensions

(Recommended Value, Top View)



Note: The actual product is marked differently from the image shown here.

Approved Standards

UL recognized

Approved Standards	Contact form	File No.
UL (recognized)	1a (SPST-NO)	E80555

Safety Precautions

- Refer to the *Common Precautions for All MOS FET Relays* for precautions that apply to all MOS FET Relays.

Please check each region's Terms & Conditions by region website.

OMRON Corporation Electronic and Mechanical Components Company

Regional Contact

Americas

<https://www.components.omron.com/>

Asia-Pacific

<https://ecb.omron.com.sg/>

Korea

<https://www.omron-ecb.co.kr/>

Europe

<http://components.omron.eu/>

China

<https://www.ecb.omron.com.cn/>

Japan

<https://www.omron.co.jp/ecb/>