

RF MCX Connectors




Bandwidth: 3-6 GHz, depending upon connector. (see data sheet on website.)

Working Voltage: For CE compliance and personal safety, do not hold in hand when voltages exceed 33 Vrms/70 Vdc. Maximum voltage for hands free use: 170 Vrms. Do not use on circuits where transient stresses can exceed the rated voltage.

Materials: Body: brass, gold-plated finish; Center Contacts: plug: gold-plated brass; jack: gold-plated beryllium copper.


Above specifications apply to the models on this page

MCX Plug, Straight Crimp




Model#	Ω	Cable Group RG /U
73002	50	174, 316
73003		178
73004	75	179

MCX Jack, Straight Crimp

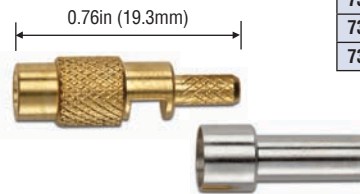

Model#	Ω	Cable Group RG /U
73010	50	174, 316
73011		178
73012	75	179


MCX Plug, Right-Angle Crimp

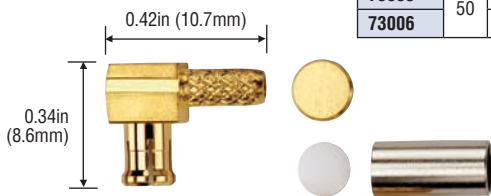

Model#	Ω	Cable Group RG /U
73005	50	174, 316
73006		178


MCX 50Ω Jack, Straight PCB Receptacle

73007




MCX 50Ω Jack, Straight Surface Mount Receptacle

73018




MCX Plug, Straight Semi-Rigid Crimp




Model#	Ω	Cable Group RG /U
73014	50	402
73015		405

MCX 50Ω Jack, Right-Angle PCB Receptacle

73008



MCX Plug, Right-Angle Semi-Rigid Crimp



Model#	Ω	Cable Group RG /U
73016	50	402
73017		405