


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

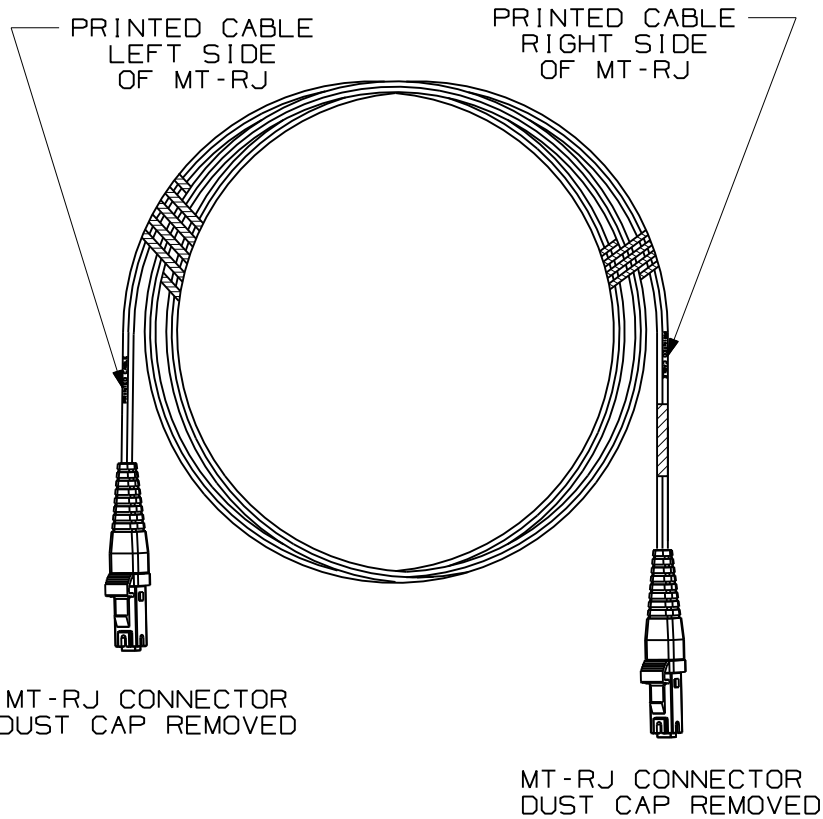

| PANDUIT PART NO. | DESCRIPTION | AVAILABLE LENGTHS |
|------------------|---|---------------------------|
| F6Z12-12M* | 62.5/125um OR 50/125um MULTIMODE RISER RATED PATCHCORD MT-RJ TO MT-RJ | 1, 2, 3, 5, & 10 METER |
| F5Z12-12M* | | |

| COMPONENT | TYPE/DESCRIPTION | COLOR | MAXIMUM LOSS |
|------------|--|--------|--------------|
| CABLE | 62.5 OR 50/125um 1.8mm ZIPCORD CABLE RISER RATED | ORANGE | |
| CONNECTORS | MULTIMODE MT-RJ | BLACK | .35 dB |

| PANDUIT PART NO. | DESCRIPTION | AVAILABLE LENGTHS |
|------------------|---|---------------------------|
| F6LZ12-12M* | 62.5/125um OR 50/125um MULTIMODE LS-ZH PATCHCORD MT-RJ TO MT-RJ | 1, 2, 3, 5, & 10 METER |
| F5LZ12-12M* | | |

| COMPONENT | TYPE/DESCRIPTION | COLOR | MAXIMUM LOSS |
|------------|---|--------|--------------|
| CABLE | 62.5 OR 50/125um 1.8mm ZIPCORD CABLE LOW SMOKE-ZERO HALOGEN | ORANGE | |
| CONNECTORS | MULTIMODE MT-RJ | BLACK | .35 dB |


- NOTES:
1. SEE CURRENT CATALOG FOR PACKAGE QUANTITY.
 2. FOR LENGTHS OTHER THAN THOSE SHOWN, CONTACT YOUR PANDUIT SALES PERSON.
 3. TESTED TO EIA/TIA 568-B.3.
 4. PATCH CORD ROUTING CONFIGURATION A TO B.

| REV | DATE | BY | CHK | DESCRIPTION | ECN | R | CUST | SUP | OTH |
|-----|----------|----|-----|-------------------------|----------|---|------|-----|-----|
| R | 06-30-06 | JH | | RELEASED FOR PRODUCTION | 02412-11 | | | | |

FIBER OPTIC PATCH CORD
MT-RJ TO MT-RJ CONFIGURATION
CUSTOMER DRAWING



PANDUIT™
CORP.
TINLEY PARK, ILL 60477



ALL DIMENSIONS ARE GIVEN IN INCHES
UNLESS OTHERWISE SPECIFIED.
DIMENSIONAL TOLERANCES ARE:
(.X) ±.03 | (.XXX) ±.010 | (.3) ±.01
ANGLES

DRAWING FILENAME
MO2412BP_DC_00A.prt

SCALE
NONE

DRAWN BY
JH

REVIEW DRAWING NUMBERS

PART NO.
SEE TABLE

DATE
06-22-06

CHK'D

DRAWING NO.
02412-11

SIZE
A