


Thermal Transfer Continuous Tapes

- Tapes offer crisp, clear legends with superior legibility
- Available in continuous color vinyl or clear polyester and supplied on rolls

- Panduit labeling software packages include all label formats for quick and easy label production



Part Number System for Continuous Tapes

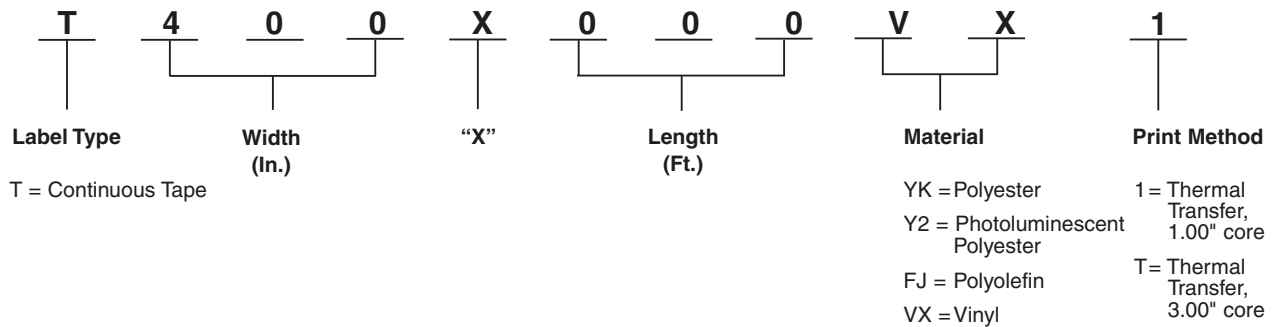

Material/Print Method Selection Guide

| Material | Print Method | Temperature Range | Features |
|--|----------------------|------------------------------------|--|
| Polyester, Clear (YK) | Thermal Transfer (T) | -51°F to 275°F (-46°C to 135°C) | Indoor/outdoor rated; provides durability, high temperature resistance, and dimensional stability; does not stretch or easily tear |
| Vinyl, Yellow (VX) Black (VY) Blue (VQ) Brown (VR) Gray (VT) Green (VS) Orange (VU) Purple (VV) Red (VW) White (VP) | | -58°F to 176°F (-50°C to 80°C) | Indoor/outdoor rated; conformable material for flat applications and safety and facility identification; can be overlaminated to increase durability |

Table continues on page E2.22

A.
System
Overview

B1.
Cable Ties

B2.
Cable
Accessories

B3.
Stainless
Steel Ties

C1.
Wiring
Duct

C2.
Surface
Raceway

C3.
Abrasion
Protection

C4.
Cable
Management

D1.
Terminals

D2.
Power
Connectors

D3.
Grounding
Connectors

E1.
Labeling
Systems

E2.
Labels

E3.
Pre-Printed
& Write-On
Markers

E4.
Permanent
Identification

E5.
Lockout/
Tagout
& Safety
Solutions

F.
Index

A.
System
Overview

Thermal Transfer Continuous Tapes (continued)

B1.
Cable Ties

B2.
Cable Accessories

B3.
Stainless
Steel Ties

C1.
Wiring
Duct

C2.
Surface Raceway

C3.
Abrasion
Protection

C4.
Cable
Management

D1.
Terminals

D2.
Power Connectors

D3.
Grounding
Connectors

E1.
Labeling Systems

E2.
Labels

E3.
Pre-Printed
& Write-On
Markers

E4.
Permanent
Identification

E5.
Lockout/
Tagout
& Safety
Solutions

F.
Index

| Part Number | Part Description | Height | | Length | | Std. Pkg. Qty. | Std. Ctn. Qty. |
|---------------------|------------------------|--------|-------|--------|------|----------------|----------------|
| | | In. | mm | Ft. | m | | |
| T100X000VP1Y | White, vinyl tape. | 1.00 | 25.4 | 100.0 | 30.5 | 1 | 4 |
| T100X000VQ1Y | Blue, vinyl tape. | 1.00 | 25.4 | 100.00 | 30.5 | 1 | 4 |
| T100X000VS1Y | Green, vinyl tape. | 1.00 | 25.4 | 100.00 | 30.5 | 1 | 4 |
| T100X000VU1Y | Orange, vinyl tape. | 1.00 | 25.40 | 100.0 | 30.5 | 1 | 4 |
| T100X000VW1Y | Red, vinyl tape. | 1.00 | 25.4 | 100.00 | 30.5 | 1 | 4 |
| T100X000VX1Y | Yellow, vinyl tape. | 1.00 | 25.40 | 100.0 | 30.5 | 1 | 4 |
| T100X000VY1Y | Black, vinyl tape. | 1.00 | 25.4 | 100.00 | 30.5 | 1 | 4 |
| T100X000YK1 | Clear, polyester tape. | 1.00 | 25.4 | 100.00 | 30.5 | 1 | 4 |
| T200X000VP1Y | White, vinyl tape. | 2.00 | 50.8 | 100.0 | 30.5 | 1 | 4 |
| T200X000VQ1Y | Blue, vinyl tape. | 2.00 | 50.80 | 100.0 | 30.5 | 1 | 4 |
| T200X000VS1Y | Green, vinyl tape. | 2.00 | 50.8 | 100.0 | 30.5 | 1 | 4 |
| T200X000VU1Y | Orange, vinyl tape. | 2.00 | 50.8 | 100.0 | 30.5 | 1 | 4 |
| T200X000VV1Y | Purple, vinyl tape. | 2.00 | 50.8 | 100.0 | 30.5 | 1 | 4 |
| T200X000VW1Y | Red, vinyl tape. | 2.00 | 50.8 | 100.0 | 30.5 | 1 | 4 |
| T200X000VX1Y | Yellow, vinyl tape. | 2.00 | 50.8 | 100.0 | 30.5 | 1 | 4 |
| T200X000VY1Y | Black, vinyl tape. | 2.00 | 50.8 | 100.0 | 30.5 | 1 | 4 |
| T200X000YK1 | Clear, polyester tape. | 2.00 | 50.8 | 100.0 | 30.5 | 1 | 4 |
| T225X000YK1 | Clear, polyester tape. | 2.25 | 57.2 | 100.0 | 30.5 | 1 | 4 |
| T400X000VP1Y | White, vinyl tape. | 4.00 | 101.6 | 100.0 | 30.5 | 1 | 4 |
| T400X000VQ1Y | Blue, vinyl tape. | 4.00 | 101.6 | 100.0 | 30.5 | 1 | 4 |
| T400X000VS1Y | Green, vinyl tape. | 4.00 | 101.6 | 100.0 | 30.5 | 1 | 4 |
| T400X000VU1Y | Orange, vinyl tape. | 4.00 | 101.6 | 100.0 | 30.5 | 1 | 4 |
| T400X000VV1Y | Purple, vinyl tape. | 4.00 | 101.6 | 100.0 | 30.5 | 1 | 4 |
| T400X000VW1Y | Red, vinyl tape. | 4.00 | 101.6 | 100.0 | 30.5 | 1 | 4 |
| T400X000VX1Y | Yellow, vinyl tape. | 4.00 | 101.6 | 100.0 | 30.5 | 1 | 4 |
| T400X000VY1Y | Black, vinyl tape. | 4.00 | 101.6 | 100.0 | 30.5 | 1 | 4 |
| T400X000YK1 | Clear, polyester tape. | 4.00 | 101.6 | 100.0 | 30.5 | 1 | 4 |
| T425X000YK1 | Clear, polyester tape. | 4.25 | 107.9 | 100.0 | 30.5 | 1 | 4 |

Order number of rolls required.

Use with Panduit thermal transfer ribbons.

Labels roll mounted on 3.00" cores; when using the TDP43MY printer and 3.00" cores, the roll stand (TDP43M-RS) is required.