


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

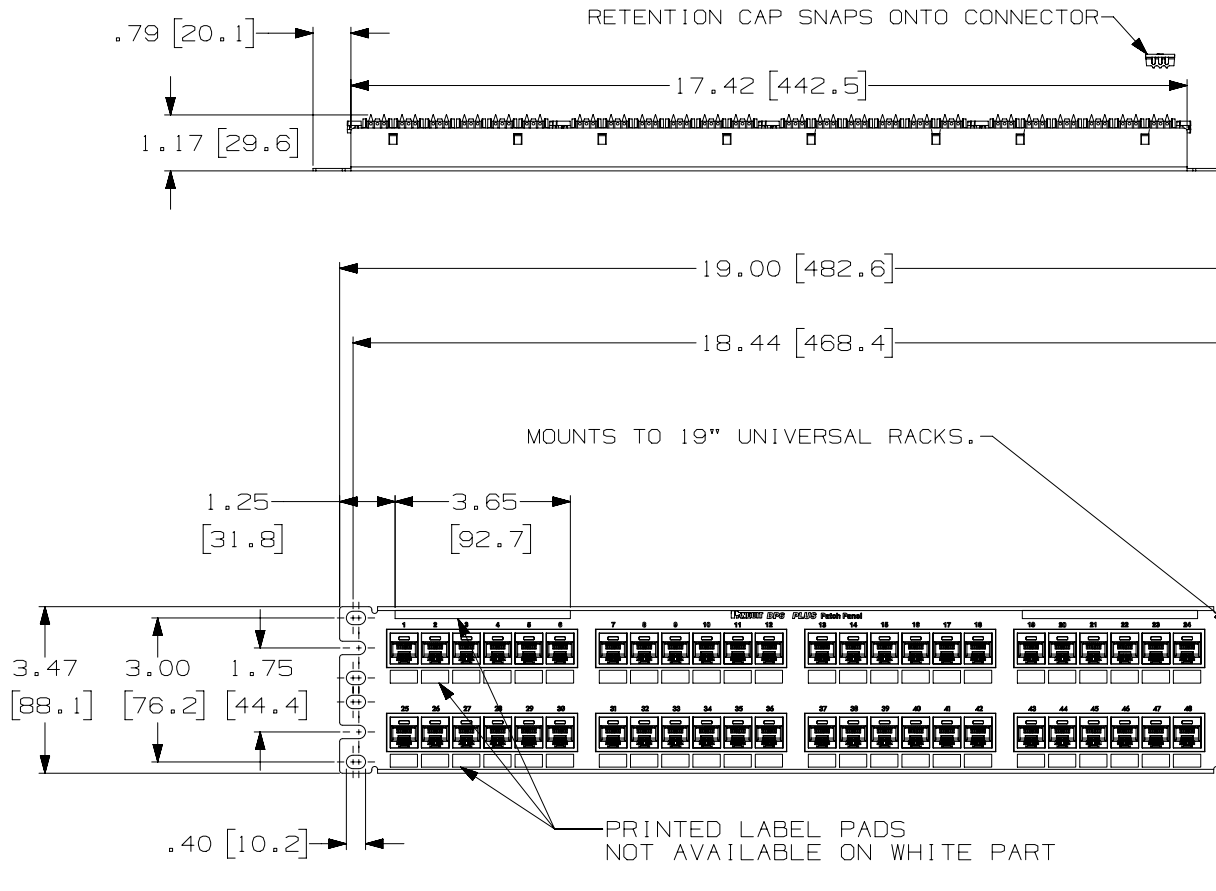

| PANDUIT PART NO. | WEIGHT (APPOX.) |
|------------------|------------------|
| DP486X88TGY | 2.2 lb (997.9 g) |
| DP486X88TGWH | 2.2 lb (997.9 g) |

NOTES:

- SEE CURRENT CATALOG FOR VARIOUS APPLICATIONS AS WELL AS OPTIONAL ICONS.
- MATERIAL:
 PANEL HOUSING: STEEL
 RJ45 MODULES: THERMOPLASTIC RESIN UL94V-0
 PUNCHDOWN BLOCKS: THERMOPLASTIC RESIN UL94V-0
 BEZEL ASSEMBLY: THERMOPLASTIC RESIN UL94H-B
 RETENTION CAP: THERMOPLASTIC RESIN UL94V-0
- 48 PORT PATCH PANEL 8 POSITION 8 WIRE.
- THE PATCH PANEL IS DESIGNED FOR MOUNTING TO 19" UNIVERSAL RACKS.
- FOUR (4) 12-24 X 1/2" ROUND HEAD SCREWS ARE PROVIDED FOR FASTENING TO RACKS.
- DIMENSIONS IN BRACKETS ARE IN METRIC.
- USE 110 STYLE TERMINATION TOOL FOR PUNCHDOWN.
- RETENTION CAPS (ONE PER CONNECTOR) PROVIDED FOR SNAP-IN ON TERMINATED CONNECTORS.

| | | | |
|---|--------|----------------------------|-------|
| PART NUMBER | | DP486X88TGY ; DP486X88TGWH | |
| TITLE | | | |
| DP6A 10GIG 48 PORT PATCH PANEL | | | |
| CUSTOMER DRAWING | | | |
| ITEM REVISION NAME | | M02479JA/02 | |
| DATASET FILE NAME | | M02479JA_DC237/02A | |
| UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN (mm) | | MATERIAL: | |
| .x ± .xxx ± .010 (.3) | | SEE NOTE 2 | |
| .xx ± .03 (.8) ANGLES ± | | DRAWING NUMBER: | |
| THIRD ANGLE PROJECTION | | 02479-237 | |
| DRAWN BY | DATE | CHK | SCALE |
| LZ | 3-4-06 | CEF | .25-1 |
| SHT 1 OF 1 | | A | |

| REV | DATE | BY | CHK | APR | DESCRIPTION | ECN |
|-----|---------|------|------|-----|---|-----------|
| 3 | 9-27-18 | BAME | KRKE | MMR | B. ADDED P/N DP486X88TGWH; C. REMOVED M6 SCREWS | M09000HW |
| 2 | 5-22-14 | MDJR | REFR | EJH | A. UPDATED TITLE BLOCK. REMOVED PREVIOUS REVISIONS FOR CLARITY. | 02479-237 |

D10100DA/14