


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NO.	MAX. BUNDLE DIA.	PACKAGE QTY.	"L" LENGTH +/- .3" [ 7 ]
MLT2EH-LP	2" [ 51 ]	50	11.8" [ 300 ]
MLT4EH-LP	4" [ 102 ]	50	17.1" [ 434 ]
MLT6EH-LP	6" [ 152 ]	50	23.4" [ 594 ]
MLT8EH-LP	8" [ 203 ]	50	29.7" [ 754 ]
MLT10EH-LP	10" [ 254 ]	50	35.9" [ 912 ]
MLT12EH-Q	12" [ 305 ]	25	42.2" [ 1072 ]

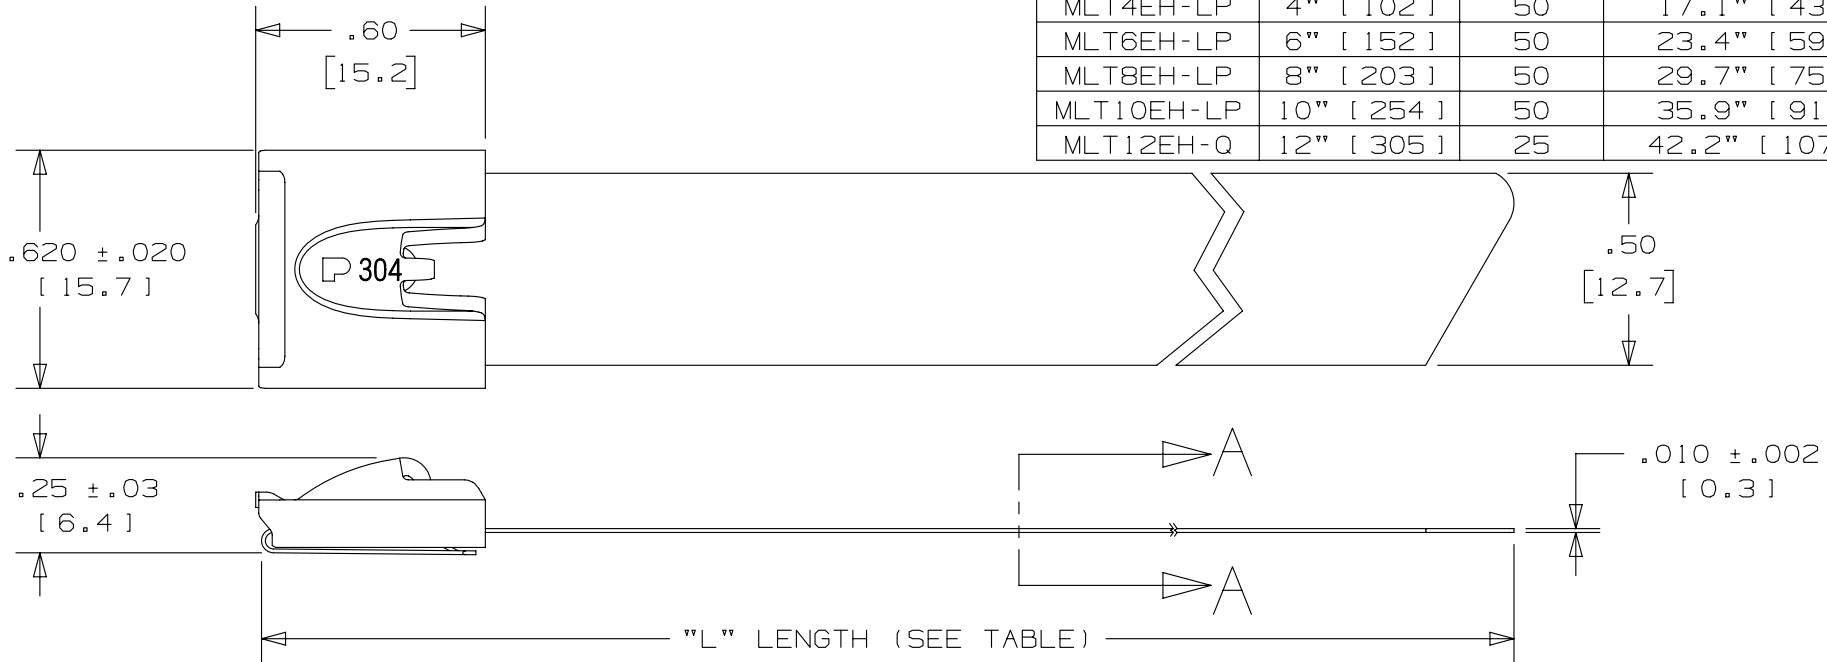

- NOTES:
1. APPLICATION TOOLS - ST2MT, RT2HT, RT2HTN & PBTMT
  2. MINIMUM LOOP TENSILE STRENGTH - 600 LBS. (2670 NEWTONS) WHEN TESTED ON A 3" MANDREL.
  3. BRACKETS [ ] DENOTE DIMENSIONS IN MILLIMETERS, AND ARE SHOWN FOR REFERENCE ONLY
  4. TOLERANCES:  
 .XXX = ±.010 [ .25 ]    .XX = ±.02 [ .5 ]  
 .X = ±.03 [ .8 ]    ANGLES = ±2°
  5. MATERIAL: 304 STAINLESS STEEL

FULLY ROUNDED  
EDGES ALONG  
STRAP BODY

SECTION A - A  
SCALE: 4x

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	TITLE			MATERIAL:					
							<b>METAL LOCKING TIE EXTRA HEAVY DUTY 304 STAINLESS STEEL</b>						<b>PANDUIT</b>		
							CUSTOMER DRAWING								
							ITEM REVISION NAME			N41155BS/04			<b>SEE NOTES</b>		
							DATASET FILE NAME			N41155BS_DC/04A					
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [ mm ]			DRAWING NUMBER:			N41155BS_DC		
							.x ± .03 [ .8 ]    .xxx ± .010 [ .25 ] .xx ± .02 [ .5 ]    ANGLES ± 5 °			THIRD ANGLE PROJECTION					
04A	02/13	JAMB	SKB	RGR0	UPDATE DRAWING TO NEW PANDUIT TITLE BLOCK AND PANDUIT LOGO REMOVED APPLICATION TOOL ST3MT, ADDED ST2MT TOOL	SSECN01028	DRAWN BY			SCALE					
03A	2/12	MIM	RGR0	---	NOTE 3: METRIC DIMENSIONS NOTED AS BEING SHOWN FOR REFERENCE ONLY	----	JAMB			2:1					
							DATE			SHT 1 OF 1					
							01/04			A					
							CHK								
							DPN								