

# VS-25-T-20-1-S-S

Order No.: 1655690

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1655690>

D-SUB sleeve housing, shell size 3, shielded, IP20 degree of protection

**Commercial data**

GTIN (EAN)	4046356029582
sales group	D500
Pack	1 pcs.
Customs tariff	85366990
Weight/Piece	0.0206 KG
Catalog page information	Page 327 (PC-2009)

**Product notes**WEEE/RoHS-compliant since:  
06/12/2006

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.


**Technical data****General data**

Design	25
Height	15.2 mm
Width	53.2 mm
Length	37.7 mm
Color	Bare metallic
No. of cable exits	1
Cable exit	Straight

External cable diameter	4 mm ... 8.5 mm
Degree of protection	IP20
Ambient temperature (operation)	0 °C ... 70 °C
Housing material	ABS
Housing surface material	Metal-plated
Inflammability class acc. to UL 94	V0

### Diagrams/Drawings

#### Dimensioned drawing

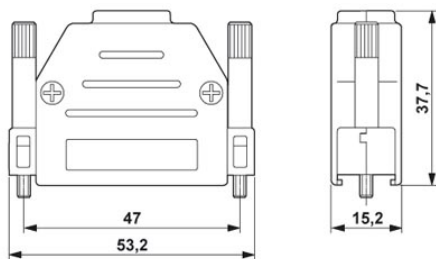

D-SUB sleeve housings

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2010 Phoenix Contact  
Technical modifications reserved;