

# Electronic housing - HCS-C MAXI C C C C 7035 - 2203165

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Handheld housing, C-Maxi, light gray, front level closed, consisting of two half shells with screws

## Your advantages

- ✔ Item is from the HCS product range
- ✔ Suitable for handheld devices
- ✔ Ergonomic straight or staggered housing design
- ✔ Integration of LCD displays and membrane keypads
- ✔ Degree of protection: up to IP54
- ✔ Temperature range: -20 °C to +50 °C
- ✔ Shock-resistant ABS plastic
- ✔ Flammability rating UL 94-V0



## Key Commercial Data

Packing unit	1 pc
GTIN	
GTIN	4055626377759

## Technical data

### Item properties

Type	HCS-C MAXI C C C C 7035
Order No.	2203165
Housing type	Handheld housing
Type	straight
Max. IP code to attain	IP54
Battery compartment	no

### Measurements

# Electronic housing - HCS-C MAXI C C C C 7035 - 2203165

## Technical data

### Measurements

Caption	Schematic representation – for additional information, see product range drawing in the Download Center
Width [ w ]	94 mm
Height [ h ]	182.5 mm
Depth [ d ]	39 mm

### Material specifications

Color (RAL)	light gray (7035)
Flammability rating according to UL 94	V0
Housing material	ABS

### Hammer test

Specification	IEC 60068-2-75:2014-09
Impact energy	0.7 J
Number of drop cycles	5

### Thermostability (ball thrust test)

Specification	IEC 60695-10-2:2014-02
Temperature	80 °C
Test duration	1 h
Force	20

### Test for assessing the risk of fire (glow wire)

Specification	IEC 60695-2-11:2014-02
Temperature	850 °C
Time of exposure	30 s

### Degrees of protection provided by enclosures (IP code)

Specification	IEC 60529:1989-11 + AMD 1:1999-11 + AMD 2:2013-08
Result, degree of protection, IP code	IP65

### Packaging information

Pieces per package	1
Denomination packing units	Pcs.


### Standards and regulations

Flammability rating according to UL 94	V0
--	----

## Drawings

# Electronic housing - HCS-C MAXI C C C C 7035 - 2203165

Dimensional drawing

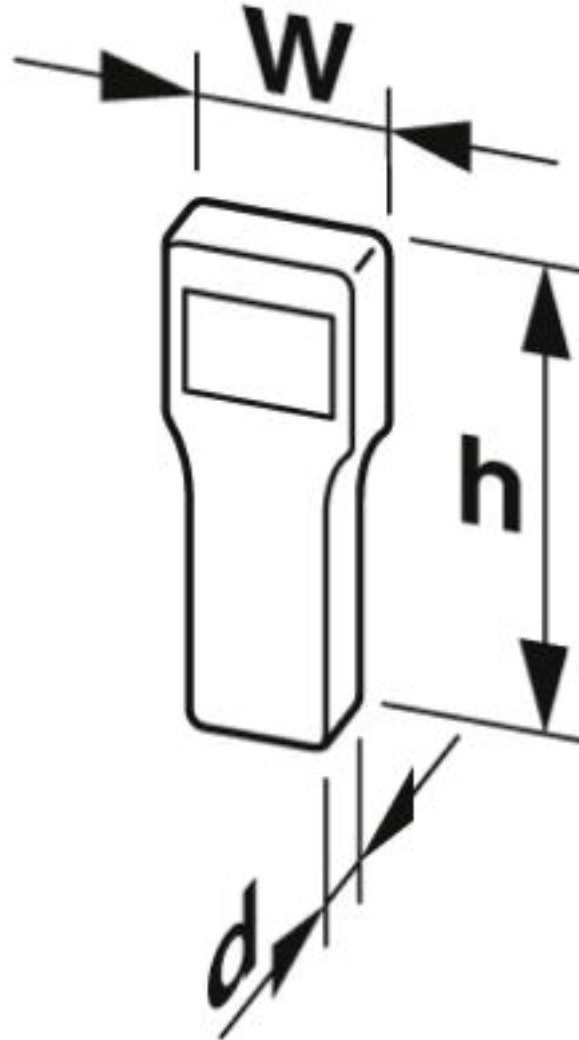

Schematic representation – for additional information, see product range drawing in the Download Center

## Classifications

eCl@ss

eCl@ss 10.0.1	27182702
eCl@ss 5.1	27180506
eCl@ss 6.0	27180800
eCl@ss 7.0	27182702
eCl@ss 8.0	27182702
eCl@ss 9.0	27182702

ETIM

ETIM 5.0	EC001031
----------	----------

# Electronic housing - HCS-C MAXI C C C C 7035 - 2203165

## Classifications

### ETIM

ETIM 6.0	EC001031
ETIM 7.0	EC001031

## Accessories

### Accessories

#### Screwdriver tools

Philips screwdriver - SF-PH 0-60 - 1212558



Screwdriver, PH crosshead, size: PH 0 x 60, 2-component grip, with non-slip grip

---

## Additional products

Seal - HCS-C MAXI SEAL - 2203580



Sealing set without battery chamber, including cord and O-rings

---

Seal - HCS-C MAXI D-SEAL 2,8 - 2203739



Sealing frame, self-adhesive, lasered, for 2.8" display

---

Adhesive - HCS-C MAXI W-GLUE - 2203746



Transfer adhesive for display window

---

---

Phoenix Contact 2020 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>