PHŒNIX CONTACT

Electronic housing - DCS 7 M C O BP C 7035 - 2203184

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)

Display housing, 7", light gray, central window, front level, for battery pack consisting of two half shells, with screws and battery pack contacts

Your advantages

☑ Display housings for mobile and stationary operator panels

☑ Integration of TFT display and membrane keypads

☑ Degree of protection: up to IP54

☑ Temperature range: -20°C to +50°C

☑ Shock-resistant ABS plastic

☑ Flammability rating UL 94-V0

RoHS **IP54**

Key Commercial Data

Packing unit	2 pc
GTIN	4 055626 378381
GTIN	4055626378381

Technical data

Item properties

Type	DCS 7 M C O BP C 7035
Order No.	2203184
Housing type	Display housing
Max. IP code to attain	IP54
Battery compartment	for APP battery housing
Wall fastening	yes
Ventilation openings present	no

Measurements

Width [w]	224 mm
Height [h]	157 mm

Electronic housing - DCS 7 M C O BP C 7035 - 2203184

Technical data

Measurements

Depth [d]	40 mm

Material specifications

Flammability rating according to UL 94	V0
Housing material	ABS

Packaging information

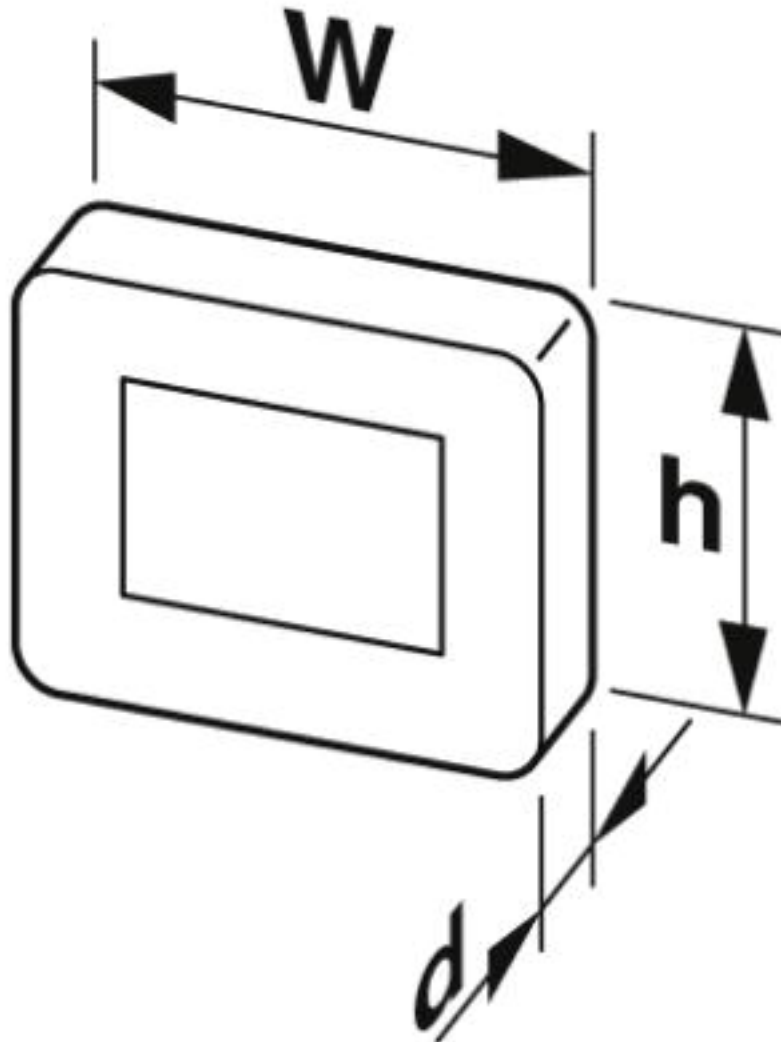| Pieces per package	2
Denomination packing units	Pcs.

Standards and regulations

Flammability rating according to UL 94	V0

Drawings

Electronic housing - DCS 7 M C O BP C 7035 - 2203184

Dimensional drawing

Classifications

eCl@ss

eCl@ss 10.0.1	27182702
eCl@ss 5.1	27180506
eCl@ss 6.0	27180800
eCl@ss 7.0	27182702
eCl@ss 8.0	27182702
eCl@ss 9.0	27182702

ETIM

ETIM 5.0	EC001031
ETIM 6.0	EC001031

Electronic housing - DCS 7 M C O BP C 7035 - 2203184

Classifications

ETIM

ETIM 7.0	EC001031

Accessories

Accessories

Screwdriver tools

Philips screwdriver - SF-PH 0-60 - 1212558

Screwdriver, PH crosshead, size: PH 0 x 60, 2-component grip, with non-slip grip

Additional products

Seal - DCS 5,7-7,0 SEAL - 2203584

Sealing set, including cord and O-rings

Display - D T 7,0 WVGA P - 2203551

TFT module 7", 800 x 480 pixels, transmissive/color, LED backlight, white, interface: parallel, 24 bit, operating temperature: -20 °C ... 70 °C

Mounting set - DCS D-FIX 7,0 - 2203830

Mounting set including plate and screws, for display mounting

PHŒNIX CONTACT

Electronic housing - DCS 7 M C O BP C 7035 - 2203184

Accessories

Seal - DCS D-SEAL 3,0MM - 2203749

Sealing strip, self-adhesive, for displays of the DCS housing series (roll: 100 m)

Washer/ring - DCS 7,0 WIN 1,5 CLEAR - 2203596

Acrylic glass, satin-finished, frame printed black, for display 800x480

Electronic housing - DCS B-PACK ENCL F 7035 - 2203751

Additional battery pack housing for DCS 5.7-7.0

Wall bracket - DCS 5,7-7,0 WALL MOUNT 7035 - 2203752

Wall bracket for housing