

Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation at <http://www.download.phoenixcontact.com>. The General Terms and Conditions of Use apply to Internet downloads.

▶ Extract from the online catalog



Wireless transceiver (transmitter and receiver) with RS-232, RS-485/RS-422 interface and bus foot, for 900 MHz ISM band (America)

Order No.	2867296
Ord designation	RAD-ISM-900-DATA-BD-BUS
EAN	4017918952754
Pack	1 Pcs.
Customs tariff	85299020
Weight/Piece	0.2418 KG
Catalog page information	Page 539 (IF-2007)

▶ Technical data

Wireless set

Set contents 1 transceiver

Spark gap

Direction Bi-directional
 Frequency range 902 MHz ... 928 MHz
 Number of channel groups 4
 Number of channels per group 63
 Transmission capacity 1 W

Serial interface

RAD-ISM-900-DATA-BD-BUS



Name	RS-232
Data rate	1,2 / 2,4 / 9,6 / 19,2 / 38,4 kBit/s
Type of connection	SUB-D 9 (socket)
File format/coding	Asynchronous
Data flow control/protocols	RTS/CTS
Name	RS-485/RS-422
Data rate	1,2 / 2,4 / 9,6 / 19,2 / 38,4 kBit/s
Type of connection	Pluggable COMBICON screw terminal block

Supply

Supply voltage	24 V DC
Range of supply voltages	9 V DC ... 30 V DC
Typical current consumption	110 mA
Max. current consumption	180 mA

General data


Ambient temperature (operation)	-40 °C ... 70 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Degree of protection	IP20
Installation position	Any
Assembly instructions	on TS 35 profile rail acc. to EN 60715
Housing material	Polyamide PA non-reinforced
Length	99 mm
Width	22.5 mm
Height	114.5 mm
Conformance	FCC directive, Part 15.247
Conformance	ISC directive RSS 210
UL, USA / Canada	Class I, Div. 2, Groups A, B, C, D

Connection data

Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Type of connection	Screw connection
Stripping length	8 mm
Screw thread	M3

► Drawings

Block diagram

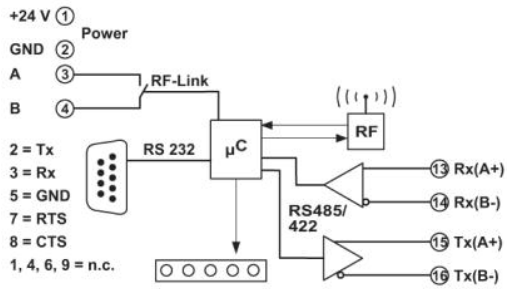

Logo



► Accessories

Item	Designation	Description
Cable/conductor		
2867238	RAD-CAB-LMR400-100	Antenna extension cable, length: 100 ft
2867380	RAD-CAB-LMR400-60	Antenna extension cable, length: 60 ft
2867393	RAD-CAB-LMR400-80	Antenna extension cable, length: 80 ft
2885210	RAD-CAB-LMR600-125	Antenna extension cable, length: 125 ft
2885184	RAD-CAB-LMR600-150	Antenna extension cable, length: 150 ft
2885197	RAD-CAB-LMR900-200	Antenna extension cable, length: 200 ft
2867597	RAD-CAB-RG213-25	Antenna extension cable, length: 25 ft
2867377	RAD-CAB-RG213-40	Antenna extension cable, length: 40 ft
2867225	RAD-CAB-RG213-50	Antenna extension cable, length: 50 ft
2867364	RAD-CAB-RG58-10	Antenna extension cable, length: 10 ft
2867212	RAD-CAB-RG58-20	Antenna extension cable, length: 20 ft
General		
2867322	RAD-IN+OUT-2D-1A-I	Analog /digital module for 2 digital inputs/outputs and 1 analog input/output
2885223	RAD-IN-2D-CNT	Digital expansion module with 2 digital inputs for measuring pulses and frequencies
2867115	RAD-IN-4A-I	Analog extension module with 4 analog current inputs 4 mA ... 20 mA
2867144	RAD-IN-8D	Digital extension module with 8 digital inputs
2867050	RAD-ISM-900-ANT-4	4-way distributor for antenna signals (antenna splitter), MCX connection (female)
2867160	RAD-ISM-900-ANT-OMNI-0-6	Omnidirectional antenna, IP65 protection, cable length 2 m, connection MCX (male)
2867199	RAD-ISM-900-ANT-OMNI-5	Omnidirectional antenna, IP65 protection, gain 7 dBi, connection N (female)
2867791	RAD-ISM-900-ANT-OMNI-FG-3-N	Omnidirectional antenna, IP65 protection, gain 5 dBi, connection N (female)
2885579	RAD-ISM-900-ANT-OMNI-FG-6-N	Omnidirectional antenna, IP65 protection, gain 8 dBi, connection N (female)
2867801	RAD-ISM-900-ANT-YAGI-3-N	Panel antenna, IP65 protection, gain 5 dBi, cable length 1.5 m, connection N (female)
2867209	RAD-ISM-900-ANT-YAGI-6	Panel antenna, IP65 protection, gain 8 dBi, connection N (female)
2867827	RAD-ISM-900-ANT-YAGI-6.5-25-AS	Panel antenna with surge protection, adapter cable MCX->N and assembly material, IP65 protection, gain 8.5 dBi, cable length 7.6 m, connection N (female)
2867830	RAD-ISM-900-ANT-YAGI-6.5-50-AS	Panel antenna with surge protection, adapter cable MCX->N and assembly material, IP65 protection, gain 8.5 dBi, cable length 15.2 m, connection N (female)
2867814	RAD-ISM-900-ANT-YAGI-6.5-N	Panel antenna, IP65 protection, gain 8.5 dBi, cable length 1.5 m, connection N (female)
2867351	RAD-ISM-900-ANT-YAGI-9	Panel antenna, IP65 protection, gain 11 dBi, connection N (female)

RAD-ISM-900-DATA-BD-BUS



2885236	RAD-OUT-2D-CNT	Digital expansion module with 2 digital outputs for output of pulses and frequencies
2867128	RAD-OUT-4A-I	Analog extension module with 4 analog current outputs 4 mA ... 20mA
2867157	RAD-OUT-8D-REL	Digital extension module with 8 digital outputs

Plug/Adapter

2867607	RAD-CON-MCX-MCX-SS	Adapter cable, pigtail 30 cm SMA (m) -> N (m)
2867717	RAD-CON-MCX-N-SB	Adapter cable, pigtail 120 cm MCX(m) -> N(f)
2885207	RAD-CON-MCX90-N-SS	Adapter cable, pigtail 120 cm 90° MCX(m) -> N(f)
2867403	RAD-CON-SMA-N-SS	Adapter cable, pigtail 120 cm SMA(m) -> N(m)

► Address

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>
Phoenix Contact
Technical modifications reserved;