

Cable - CABLE-D-37SUB/F/OE/0,25/S/2,0M - 2926250

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Assembled shielded round cable; connection 1: Single wires (37-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB socket strip (1x 37-position); cable length: 2 m

Your advantages

- ✓ Individual wire marking: 1, 2, 3, 4, etc.
- ✓ Individual wires fitted with ferrules
- ✓ Connector according to IEC 60807-2/DIN 41652
- ✓ Screw connection: 2 UNC 4-40 screws
- ✓ D-SUB socket or pin strip at one end
- ✓ Open end at one end
- ✓ Shield connection: H05V-K 1 mm² cable, black, 0.5 m in length
- ✓ 1:1 connection



Key Commercial Data

| | |
|--------------|---------------|
| Packing unit | 1 pc |
| GTIN | |
| GTIN | 4046356548045 |

Technical data

Ambient conditions

| | |
|-----------------------------------------|------------------------------------------|
| Ambient temperature (operation) | -40 °C ... 70 °C (fixed installation) |
| | -10 °C ... 70 °C (flexible installation) |
| Ambient temperature (storage/transport) | -40 °C ... 80 °C |
| Maximum altitude | ≤ 2000 m |
| Degree of protection | IP20 |
| | ≥ IP54 (Installation location) |

General

| | |
|------------------------------------|---------|
| Max. permissible operating voltage | 25 V AC |
|------------------------------------|---------|

Cable - CABLE-D-37SUB/F/OE/0,25/S/2,0M - 2926250

Technical data

General

| | |
|-----------------------------------------------|----------------------------------------------------|
| | 60 V DC |
| Max. current carrying capacity per path | 2 A (see to derating) |
| Length of cable | 2 m |
| External cable diameter | 10.8 mm ±0.5 mm |
| Single wire, cross section | 0.25 mm ² |
| Single wire, cross section [AWG] | 24 |
| Single wire, number of litz wires | 14 |
| Single wire, material | Cu uninsulated |
| Wire diameter incl. insulation | 1.2 mm ±0.05 mm |
| Smallest bending radius, fixed installation | 90 mm |
| Smallest bending radius, movable installation | 170 mm |
| Bending cycles | 5000 (at a radius of ≥ 15x outside diameter) |
| Shielding | yes |
| | Tinned copper-braided shield, approx. 85% covering |
| Cable insulation resistance | ≥ 20 MΩ/km (at 20 °C) |
| Cable resistance | ≤ 80 Ω/km (at 20 °C) |
| Outer sheath, material | Semi-rigid PVC |
| External sheath, color | gray |
| Nominal operating mode | 100% operating factor |

Connection data

| | |
|-----------------------------|--------------------|
| Connection name | Field level |
| Connection method | D-SUB socket strip |
| Number of connections | 1 |
| Number of positions | 37 |
| Torque | 0.2 Nm |
| Insertion/withdrawal cycles | > 200 |

Connection data 2

| | |
|---------------------|------------------------------------------------------------------------------------------------------|
| Connection name | Controller level |
| Connection method | Single wires |
| Number of positions | 37 |
| Note | The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end. |

Standards and Regulations

| | |
|---------------------|-----------------------------|
| Flame resistance | UL VW-1 |
| | CSA FT-1 |
| | IEC 60332-1-2 |
| | VDE 0842, Part 332-1-2 |
| | IEC 60332-3-22 |
| Resistance to oil | against occasional splashes |
| Gasoline resistance | against occasional splashes |

Cable - CABLE-D-37SUB/F/OE/0,25/S/2,0M - 2926250

Technical data

Standards and Regulations

| | |
|----------------------------------|---------------------------------------|
| Connection in acc. with standard | CUL |
| Designation | Air clearances and creepage distances |
| Standards/regulations | DIN EN 50178 |
| Rated insulation voltage | 125 V |
| Rated surge voltage | 1.2 kV |
| Insulation | Functional insulation |
| Pollution degree | 2 |
| Overvoltage category | II |

Supported controller

| | |
|------------|-----------|
| Controller | universal |
|------------|-----------|

Color code

| | |
|---------------------------------------------------|-----------------------------|
| Connector 1 = connector 2 (optional) = wire color | D-SUB37 (1) = white |
| | D-SUB37 (2) = brown |
| | D-SUB37 (3) = green |
| | D-SUB37 (4) = yellow |
| | D-SUB37 (5) = gray |
| | D-SUB37 (6) = pink |
| | D-SUB37 (7) = blue |
| | D-SUB37 (8) = red |
| | D-SUB37 (9) = black |
| | D-SUB37 (10) = violet |
| | D-SUB37 (11) = gray-pink |
| | D-SUB37 (12) = red-blue |
| | D-SUB37 (13) = white-green |
| | D-SUB37 (14) = brown-green |
| | D-SUB37 (15) = white-yellow |
| | D-SUB37 (16) = yellow-brown |
| | D-SUB37 (17) = white-gray |
| | D-SUB37 (18) = gray-brown |
| | D-SUB37 (19) = white-pink |
| | D-SUB37 (20) = pink-brown |
| | D-SUB37 (21) = white-blue |
| | D-SUB37 (22) = brown-blue |
| | D-SUB37 (23) = white-red |
| | D-SUB37 (24) = brown-red |
| | D-SUB37 (25) = white-black |
| | D-SUB37 (26) = brown-black |
| | D-SUB37 (27) = gray-green |
| | D-SUB37 (28) = yellow-gray |
| | D-SUB37 (29) = pink-green |

Cable - CABLE-D-37SUB/F/OE/0,25/S/2,0M - 2926250

Technical data

Color code


| | |
|--|-----------------------------|
| | D-SUB37 (30) = yellow-pink |
| | D-SUB37 (31) = green-blue |
| | D-SUB37 (32) = yellow-blue |
| | D-SUB37 (33) = green-red |
| | D-SUB37 (34) = yellow-red |
| | D-SUB37 (35) = green-black |
| | D-SUB37 (36) = yellow-black |
| | D-SUB37 (37) = gray-blue |

Environmental Product Compliance

| | |
|------------|-----------------------------------------------------------------------------------------------------|
| REACH SVHC | Lead 7439-92-1 |
| China RoHS | Environmentally Friendly Use Period = 50 years |
| | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

Drawings

Diagram

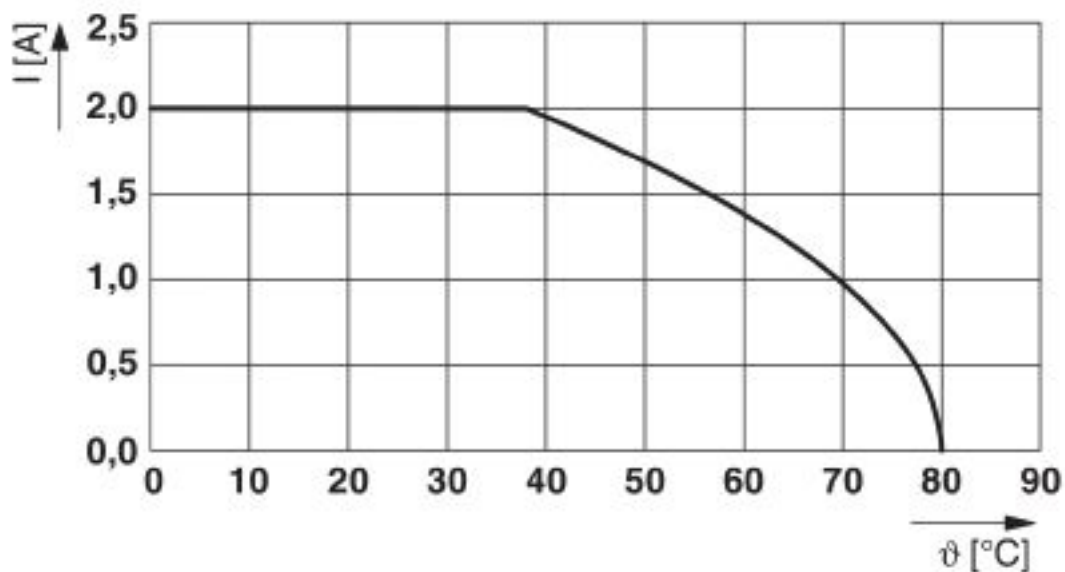

Maximum permissible current per path in uncoiled state

Classifications

eCl@ss

| | |
|---------------|----------|
| eCl@ss 10.0.1 | 27242220 |
| eCl@ss 4.0 | 27060300 |
| eCl@ss 4.1 | 27060300 |

Cable - CABLE-D-37SUB/F/OE/0,25/S/2,0M - 2926250

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 5.0 | 27242200 |
| eCl@ss 5.1 | 27242200 |
| eCl@ss 6.0 | 27249200 |
| eCl@ss 7.0 | 27249205 |
| eCl@ss 8.0 | 27249205 |
| eCl@ss 9.0 | 27242220 |

ETIM

| | |
|----------|----------|
| ETIM 2.0 | EC000237 |
| ETIM 3.0 | EC000237 |
| ETIM 4.0 | EC000237 |
| ETIM 5.0 | EC000237 |
| ETIM 6.0 | EC000237 |
| ETIM 7.0 | EC000237 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 26121620 |
| UNSPSC 7.0901 | 26121620 |
| UNSPSC 11 | 26121620 |
| UNSPSC 12.01 | 26121620 |
| UNSPSC 13.2 | 26121620 |
| UNSPSC 18.0 | 26121620 |
| UNSPSC 19.0 | 26121620 |
| UNSPSC 20.0 | 26121620 |
| UNSPSC 21.0 | 26121620 |

Approvals

Approvals

Approvals

CSA / UL Recognized / cUL Recognized / EAC / cULus Recognized

Ex Approvals

Approval details

Cable - CABLE-D-37SUB/F/OE/0,25/S/2,0M - 2926250

Approvals

| | | | |
|--------------------|--|-----------------------------------------------------------------------------------------------------------------------------------------|----------|
| CSA | | http://www.csagroup.org/services-industries/product-listing/ | 70002966 |
| Nominal voltage UN | | 125 V | |
| Nominal current IN | | 1 A | |

| | | | |
|--------------------|--|-------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| UL Recognized | | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | FILE E 238705 |
| Nominal voltage UN | | 125 V | |
| Nominal current IN | | 2 A | |

| | | | |
|--------------------|--|-------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| cUL Recognized | | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | FILE E 238705 |
| Nominal voltage UN | | 125 V | |
| Nominal current IN | | 2 A | |

| | | |
|-----|--|-------------------------|
| EAC | | RU*- DE.HB*35.B00385 |
|-----|--|-------------------------|

| | |
|------------------|--|
| cULus Recognized | |
|------------------|--|

Accessories

Accessories

Marker carrier cable

Cable marker carrier - KME - 0807083



Cable marker carrier, white, unlabeled, mounting type: Assembly with cable binders, cable diameter: > 5 mm, lettering field size: 20 mm x 8 mm

Phoenix Contact 2020 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>