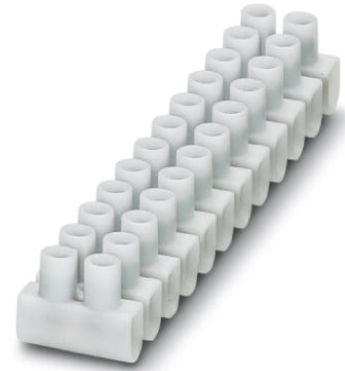



EC 4

Order No.: 3240168

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=3240168>

Polypropylene Europe terminal strip, white, for connecting solid conductors and stranded conductors with and without ferrules with a cross-section of 0.5 to 4 mm²

Commercial data	
GTIN (EAN)	 4 046356 457774
sales group	B270
Pack	10 pcs.
Customs tariff	85369010
Catalog page information	Page 360 (CL2-2011)

Product notes

WEEE/RoHS-compliant since:
10/02/2008

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data	
General	
Color	white
Insulating material	PP
Inflammability class acc. to UL 94	-

Dimensions

Width	16.6 mm
Length	94.9 mm
Height	13 mm

Technical data

Nominal current I_N	32 A (with 4 mm ² conductor cross section)
Nominal voltage U_N	450 V
Number of positions	12

Connection data

Conductor cross section solid min.	0.5 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section stranded min.	0.5 mm ²
Conductor cross section stranded max.	4 mm ²
Conductor cross section AWG/kcmil min.	20
Conductor cross section AWG/kcmil max	12
Conductor cross section stranded, with ferrule without plastic sleeve min.	0.75 mm ²
Conductor cross section stranded, with ferrule without plastic sleeve max.	2.5 mm ²
Conductor cross section stranded, with ferrule with plastic sleeve min.	0.75 mm ²
Conductor cross section stranded, with ferrule with plastic sleeve max.	2.5 mm ²
2 conductors with same cross section, solid min.	0.5 mm ²
2 conductors with same cross section, solid max.	1 mm ²
2 conductors with same cross section, stranded max.	1 mm ²
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max.	0.5 mm ²
Stripping length	5 mm
Screw thread	M2,6
Tightening torque, min	0.4 Nm
Tightening torque max	0.5 Nm

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;