

TECHNICAL DATA SHEET

Description: Ceramic Patch Antenna, 40x40x6.6mm

PIN Mount, GNSS/IRIDIUM

PART NUMBER: W3227



Features:

- Center Frequency 1621 MHz
- Band Width 177MHz
- Polarization RHCP
- Gain 4dBic
- Size 1.575 x 1.575 x 0.26"

Applications:

- Satellite signal reception
- Iridium
- GNSS (Beidou, GPS, Galileo, Glonass)
- Timing Antennas
- Tracking
- Asset Management

All dimensions are in mm / inches

Issue: 1905

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:

Pulse Worldwide Headquarters 15255 Innovation Drive #100 San Diego, CA 92128 USA

Tel:1-858-674-8100

Pulse/Larsen Antennas 18110 SE 34th St Bldg 2 Suite 250 Vancouver, WA 98683 USA Tel: 1-360-944-7551 Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0 Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4th Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998



TECHNICAL DATA SHEET

Description: Ceramic Patch Antenna, 40x40x6.6mm

PIN Mount, GNSS/IRIDIUM

PART NUMBER: W3227

ELECTRICAL SPECIFICATIONS*

Antenna Type Ceramic Patch antenna

Center Frequency 1621MHz ±10MHz

Frequency band 1532-1709MHz

 $\begin{array}{ll} \mbox{Nominal Impedance} & 50 \ \Omega \\ \mbox{VSWR in whole band} & <3.5:1 \\ \mbox{VSWR at center frequency} & <1.7:1 \\ \end{array}$

Peak RHCP Gain at Zenith >4dBic at center frequency

Half Power Beam Width 110° Solid angle

Efficiency 60% typical

Polarization RHCP

MECHANICAL SPECIFICATIONS

Overall Length 1.575 x 1.575 x 0.26"

Weight 35.8 g
Antenna Color / Material White

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature -40°C to +105°C
Storage Temperature -40°C to +105°C



^{*} All test on 63X63mm ground plane




TECHNICAL DATA SHEET


Description: Ceramic Patch Antenna, 40x40x6.6mm

PIN Mount, GNSS/IRIDIUM

PART NUMBER: W3227

MECHANICAL DRAWING

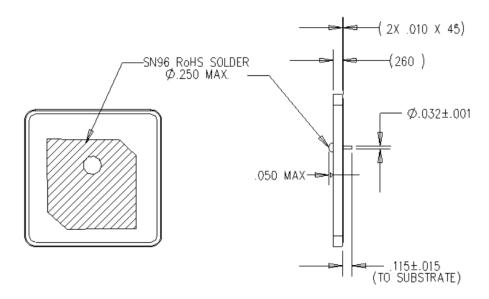






TECHNICAL DATA SHEET

Description: Ceramic Patch Antenna, 40x40x6.6mm


PIN Mount, GNSS/IRIDIUM

PART NUMBER: W3227

TEST SETUP



For VSWR On 63X63 mm ground plane

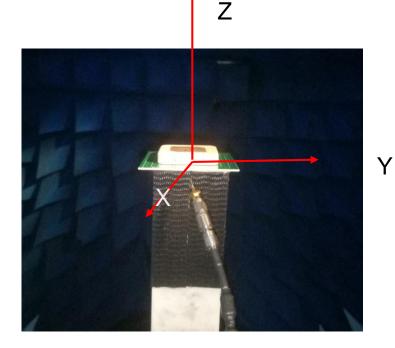

In Chamber



TECHNICAL DATA SHEET


Description: Ceramic Patch Antenna, 40x40x6.6mm

PIN Mount, GNSS/IRIDIUM


PART NUMBER: W3227

CHARTS

VSWR

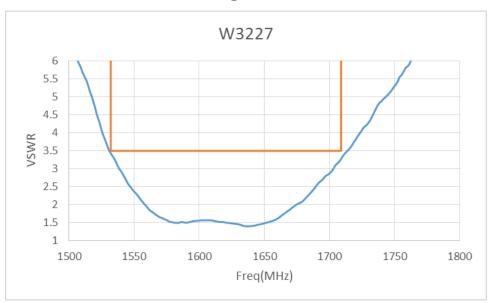

Radiation Efficiency

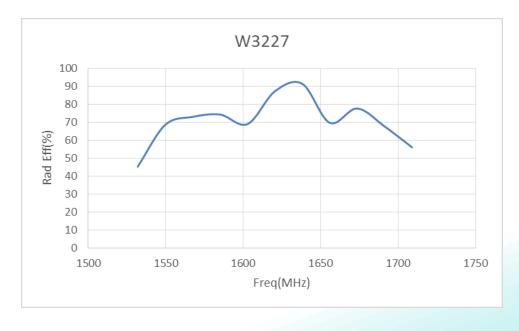

Issue: 1905





TECHNICAL DATA SHEET

Description: Ceramic Patch Antenna, 40x40x6.6mm

PIN Mount, GNSS/IRIDIUM


PART NUMBER: W3227

CHARTS

RHCP Gain at Zenith



Radiation Pattern

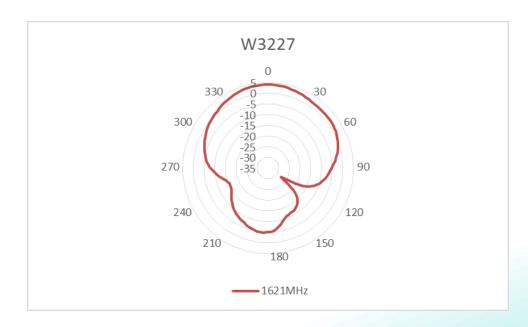



TECHNICAL DATA SHEET

Description: Ceramic Patch Antenna, 40x40x6.6mm

PIN Mount, GNSS/IRIDIUM

PART NUMBER: W3227

PACKAGING

30pcs antennas per tray

4 trays of antennas (total 120pcs) packed in a vacuum bag.

A label adhered on the vacuum bag with the P/N, Q'ty, Date and Shift information.

4 vacuum bags of antennas (total 480pcs) pack in a carton.

A label adhered on the carton with the P/N, Q'ty, WP, Date and Shift information









