

# IDT 1337, 1338 & 1339 I<sup>2</sup>C Serial Real-Time Clocks

Low-power, flexible and reliable clock devices enable efficient and cost-effective designs


## Applications

- Handhelds (GPS, POS terminals, MP3 players)
- Consumer Electronics (set-top box, digital recording)
- Office (fax, printers, copiers)
- Medical (glucometer, medicine dispensers)
- Telecom (routers, switches, servers, network applications)
- Other (thermostats, vending machines, modems, utility meters, digital photo frames, white goods)


## General Description

Integrated Device Technology Inc. introduces its first series of ultra low-power real-time clocks (RTC): **IDT1337**, **IDT1338**, and **IDT1339**. All three devices offer fast and standard I<sup>2</sup>C interface, time and date function, and are available in a variety of packages, making them cost-effective. These devices are suitable for applications that require minimum board space. By offering high noise immunity, low current consumption, 12/24 hour mode of operation, auto correction for leap year and programmable square wave output — they are ideal for a wide range of design applications. IDT RTC devices operate over an extended supply voltage range of 1.8V to 5.5V, a temperature range of -40°C to +85°C, and consume less than 1 μA current, thus enabling long battery life. The lowest time keeping voltage is 1.3V. The chart below provides an overview of additional features and benefits of the IDT1337, IDT1338 and IDT1339 real-time clocks.

Benefits	Features	1337	1338-18 1338-31	1339-2 1339-31
<i>Ideal for wide range of design applications</i>	Real-Time Clock (RTC) counts seconds, minutes, hours, day, date, month, and year with leap-year compensation valid up to 2100 (auto correction for leap year)	✓	✓	✓
	12/24 hour mode of operation with AM/PM indicator	✓	✓	✓
	End of month date adjusted for months fewer than 31 days, including corrections for leap years	✓	✓	✓
	High noise immunity	✓	✓	✓
	Programmable square-wave output (on 1337, defaults to 32 kHz on power-up)	✓	✓	✓
	Full binary-coded decimal (BCD) clock/calendar	✓	✓	✓
	Two programmable time-of-day alarms	✓		✓
	Oscillator Stop-Flag	✓	✓	✓
<i>Package</i>	Available in a variety of packages: 8-pin MSOP, 8-pin SOIC, or 16-pin SOIC (surface-mount package with an integrated crystal)	✓	✓	✓
<i>Enables long battery life</i>	Consumes less than 1 μA current	✓	✓	✓
	Low power, low current consumption clock/date device	✓	✓	✓
<i>VCC operating voltage range</i>	1.8V to 5.5V	✓	1338-18	1339-2
	2.7V to 5.5V		1338-31	1339-31
<i>Time keeping voltage</i>	1.3V minimum	✓	✓	✓
<i>Operating temperature</i>	Industrial temperature range (-40°C to +85°C)	✓	✓	✓
<i>Suitable for wide range of applications where minimal board space is essential</i>	I <sup>2</sup> C Serial bus interface	✓	✓	✓
<i>Integrated 32 kHz crystal</i>	16 pin SOIC package only	✓	✓	✓
<i>Battery backup and data storage</i>	Automatic power-fail detect and switch circuitry (backup battery to the main VCC), maintaining time/date operation		✓	✓
	56-byte battery-backed NV SRAM for data storage to main VCC		✓	
	Trickle charge capability			✓

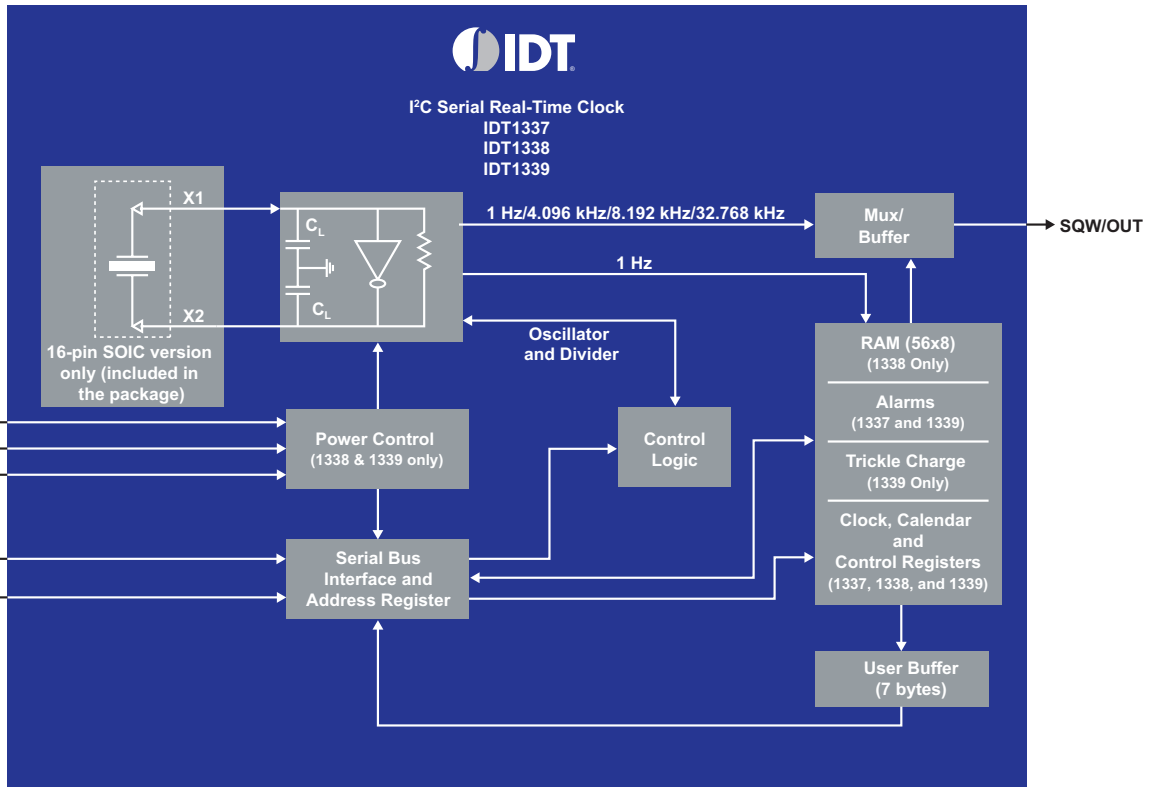


**PIN Assignment**

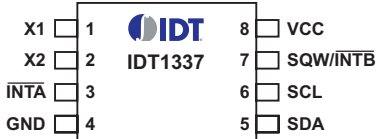

(8-pin MSOP and SOIC)

**PIN Assignment**

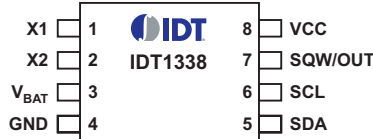


(8-pin MSOP and SOIC)

**PIN Assignment**




(8-pin MSOP and SOIC)

**PIN Assignment**

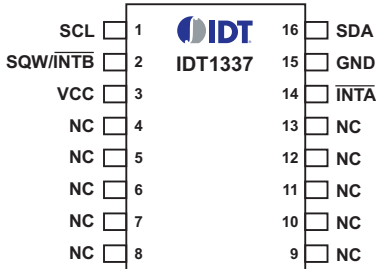


(16-pin SOIC, 300 mil)

**PIN Assignment**

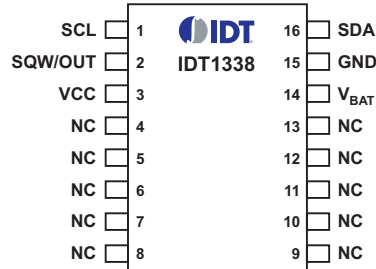

(16-pin SOIC, 300 mil)

**PIN Assignment**

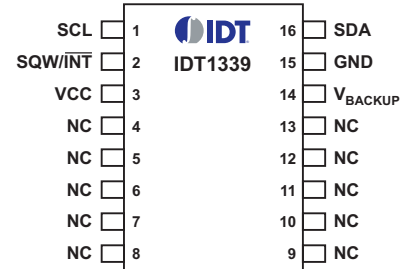

(16-pin SOIC, 300 mil)

Discover what IDT know-how can do for you.

[www.IDT.com/go/RTC](http://www.IDT.com/go/RTC)

[www.IDT.com/go/timing](http://www.IDT.com/go/timing)



© 2008 Integrated Device Technology, Inc. All rights reserved. Product specifications subject to change without notice. IDT and the IDT logo are registered trademarks of Integrated Device Technology, Inc. All other brands, product names and marks are or may be trademarks or registered trademarks used to identify products or services of their respective owners.

Printed in USA 5-08/MG/KIP/HOP/1K

FLYR-RTC-058