

WPC Qi Certified

- Single chip wireless power transmitter solution
- Tx-A1

Multilingual (Multi-Mode)

Multi-mode (multi-protocol) capability with dynamic switching

Industry-Leading Efficiency

- Integrated high efficiency half-bridge inverter
- 95% DC-AC efficiency

OTHER FEATURES


- Wide operating input voltage range
 - 18 to 20V WPC mode
 - 12 to 20V IDT proprietary mode
- Embedded MCU, ADC, program and data memories
- Closed loop power transfer control between base station and mobile device
- Demodulates and decodes WPC compliant message packets
- Proprietary base to mobile communication for authentication
- Programmable option for added security and encryption up to 64 bit for 2-way authentication
- Power good status pin
- Master and Slave I²C interface
- Compact 6 x 6 48-pin TQFN package
- Conforms to WPC specification version 1.1

SAFETY FEATURES

- Advanced Multi-layered Foreign Object Detection (FOD)
- Over temperature/voltage/current protection
- GPIOs for various status/alarm indication
- Thermal loop control

TARGET WIRELESS POWER APPS

- Wireless power charging pads or mats
- Office/airport/residential furniture
- Automotive consoles
- Tools and medical instruments
- Airports, coffee shops, or other public places

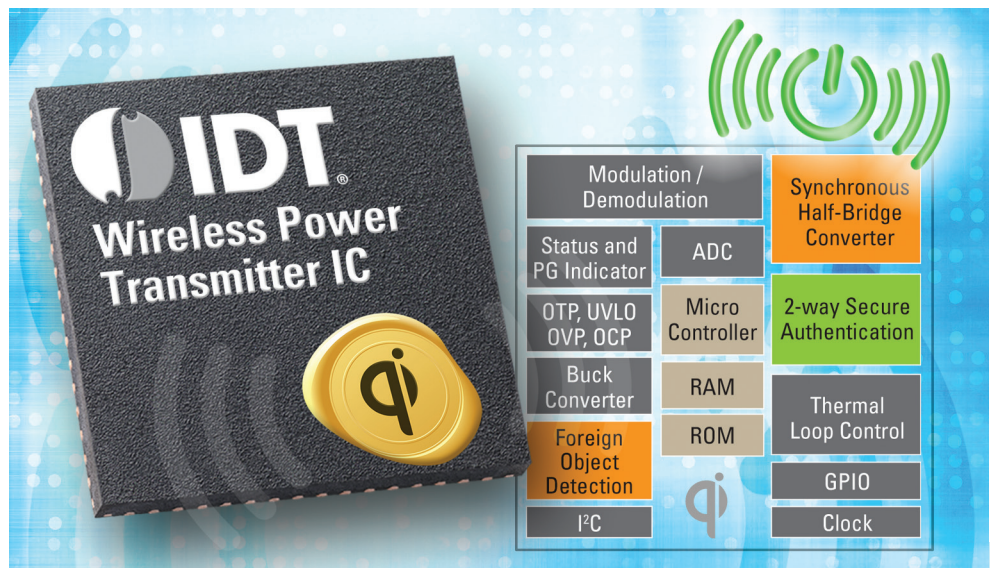


IDTP9030 is a highly integrated single-chip WPC compliant wireless power transmitter solution. The device integrates a variable frequency half-bridge power inverter for DC-AC conversion, capable of operating through a wide range of DC input voltages. As specified by the WPC transmitter specification, the power transferred to the device under charge is controlled by varying the switching frequency of the half bridge inverter from 110kHz to 205kHz. All the logic and other circuitry needed to receive and decode WPC compliant packets from the mobile device and to execute the requested power adjustments are also fully integrated into the IDTP9030. It contains logic circuits required to demodulate and decode WPC compliant message packets sent by the mobile device to adjust transferred power.

VALUE ADDED BEYOND WPC "Qi"

- Supports back channel communication
 - Transmitter communicates with Receiver
- 2-way secure authentication
- On-board microcontroller and high performance ADC for complex calculations
- GPIOs for various status/alarms indication
- Up to 7.5W power transfer in proprietary mode

IDTP9030 also may be operated in proprietary modes where it employs additional proprietary functions such as two extra levels of Foreign Object Detection (FOD), 2-way secure authentication between base and mobile, and IDT proprietary control algorithms for higher efficiency.

IDT Solution Size

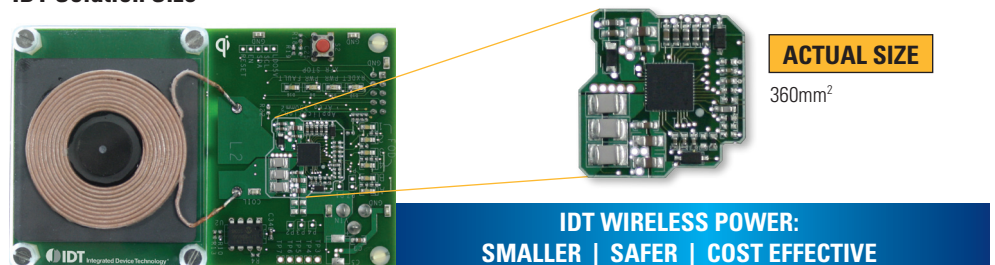

DISCLAIMER Integrated Device Technology, Inc. (IDT) and its subsidiaries reserve the right to modify the products and/or specifications described herein at any time and at IDT's sole discretion. All information in this document, including descriptions of product features and performance, is subject to change without notice. Performance specifications and the operating parameters of the described products are determined in the independent state and are not guaranteed to perform the same way when installed in customer products. The information contained herein is provided without representation or warranty of any kind, whether express or implied, including, but not limited to, the suitability of IDT's products for any particular purpose, an implied warranty of merchantability, or non-infringement of the intellectual property rights of others. This document is presented only as a guide and does not convey any license under intellectual property rights of IDT or any third parties. IDT's products are not intended for use in life support systems or similar devices where the failure or malfunction of an IDT product can be reasonably expected to significantly affect the health or safety of users. Anyone using an IDT product in such a manner does so at their own risk, absent an express, written agreement by IDT.

Integrated Device Technology, IDT and the IDT logo are registered trademarks of IDT. Other trademarks and service marks used herein, including protected names, logos and designs, are the property of IDT or their respective third party owners. © Copyright 2012. All rights reserved.

PB_IDTP9030_REVA0812



WIRELESS POWER

BY  IDT[®]

WWW.WIRELESSPOWERBYIDT.COM

Transmitter (TX) IDTP9030 Receiver (RX) IDTP9020

