

Circuit Breaker for Equipment thermal, Threaded neck type, Reset type, Screw terminals



See below:

**Approvals and Compliances**

**Description**

- Threaded neck type
- Thermal circuit breaker
- 1-pole
- Reset type
- Wide current range
- High breaking capacity
- Bolts and nuts

**Unique Selling Proposition**

- Compact design
- Positively trip-free release
- Available with cover
- Different mounting possibilities

**Applications**

- Power supplies
- Uninterruptible power supply
- Power tools
- Household appliances

**Weblinks**

[pdf data sheet](#), [html datasheet](#), [General Product Information](#), [Distributor-Stock-Check](#), [Detailed request for product](#), [Product News](#)

**Technical Data**

|                                                    |                                                                                                                                             |
|----------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| Rated Voltage AC                                   | AC 240/277 VAC, see approbations                                                                                                            |
| Rated Voltage DC                                   | 28 VDC                                                                                                                                      |
| Rated current range AC                             | 0.05 - 30 A                                                                                                                                 |
| Conditional short circuit capacity I <sub>nc</sub> | IEC 60934: PC1, AC 240 V: 1 kA                                                                                                              |
| Short circuit capacity I <sub>cn</sub>             | IEC 60934: at I <sub>n</sub> < 7 A/240 VAC : 8 x I <sub>n</sub><br>IEC 60934: at I <sub>n</sub> ≥ 7 A/240 VAC : 400 A<br>AC/DC 28 V : 400 A |
| Degree of Protection                               | from front side IP40 acc. to IEC 60529                                                                                                      |
| Dielectric Strength                                | 50Hz: 1.5kV<br>Impulse 1.2/50 μs: > 2.5kV                                                                                                   |
| Insulation Resistance                              | 500VDC > 100 MΩ                                                                                                                             |
| Endurance typical                                  | 2 x I <sub>r</sub> : 3000 switching cycles                                                                                                  |
| Endurance minimum                                  | Reset type<br>AC : 2 x I <sub>r</sub> , cos φ 0.6 :<br>DC : 2 x I <sub>r</sub> , L/R = 2 - 3 ms :<br>50 switching cycles                    |

|                           |                                                                                                                          |
|---------------------------|--------------------------------------------------------------------------------------------------------------------------|
| Overload                  | IEC: min. 40 trips<br>@ 6 x I <sub>r</sub> , cos φ 0.6<br>UL / CSA: min. 50 trips<br>@ 1.5 x I <sub>r</sub> , cos φ 0.75 |
| Allowable Operation Temp. | -5 °C to 60 °C                                                                                                           |
| Vibration Resistance      | ± 1.5 mm @ 10 - 60 Hz<br>acc. to IEC 60068-2-6, test Fc<br>10 G @ 60 - 500 Hz<br>acc. to IEC 60068-2-6, test Fc          |
| Shock Resistance          | 100 G / 6ms<br>acc. to IEC 60068-2-27, test Ea                                                                           |
| Tripping Type             | Thermal                                                                                                                  |
| Actuation Type            | Reset type                                                                                                               |
| Weight                    | ca. 10g                                                                                                                  |

**Approvals and Compliances**





Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [Details about Approvals](#)

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

## Approvals





The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products.

Approval Reference Type: T13

| Approval Logo                                                                    | Certificates                  | Certification Body | Description                              |
|----------------------------------------------------------------------------------|-------------------------------|--------------------|------------------------------------------|
|  | <a href="#">VDE Approvals</a> | VDE                | VDE Certificate Number: 123283           |
|  | <a href="#">UL Approvals</a>  | UL                 | UL File Number: E71572                   |
|  | <a href="#">CSA Approvals</a> | CSA                | CSA Certification Record: LR 37712       |
|  | <a href="#">CCC Approvals</a> | CCC                | CCC Certificate Number: 2012010307571195 |


## Product standards

Product standards that are referenced

| Organization                                                                     | Design                | Standard          | Description                                                           |
|----------------------------------------------------------------------------------|-----------------------|-------------------|-----------------------------------------------------------------------|
|  | Designed according to | IEC 60934         | Circuit-breakers for equipment (CBE)                                  |
|  | Designed according to | UL 1077           | Standard for Supplementary Protectors for Use in Electrical Equipment |
|  | Designed according to | CSA C22.2 No. 235 | Supplementary Protectors                                              |
|  | Designed according to | GB 17701          | Circuit-breaker for equipment                                         |





## Application standards

Application standards where the product can be used



| Organization                                                                       | Design                         | Standard       | Description                                                                                                          |
|------------------------------------------------------------------------------------|--------------------------------|----------------|----------------------------------------------------------------------------------------------------------------------|
|  | Designed for applications acc. | IEC/UL 62368-1 | IEC 62368-1 includes the basic requirements for safety of audio, video, information technology and office equipment. |

## Compliances

The product complies with following Guide Lines


| Identification                                                                     | Details                                      | Initiator   | Description                                                                                                                                                                                           |
|------------------------------------------------------------------------------------|----------------------------------------------|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | <a href="#">CE declaration of conformity</a> | SCHURTER AG | The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008. |
|  | <a href="#">RoHS</a>                         | SCHURTER AG | Directive RoHS 2011/65/EU, Amendment (EU) 2015/863                                                                                                                                                    |
|  | <a href="#">China RoHS</a>                   | SCHURTER AG | The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.                                                                                  |
|  | <a href="#">REACH</a>                        | SCHURTER AG | On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.                               |



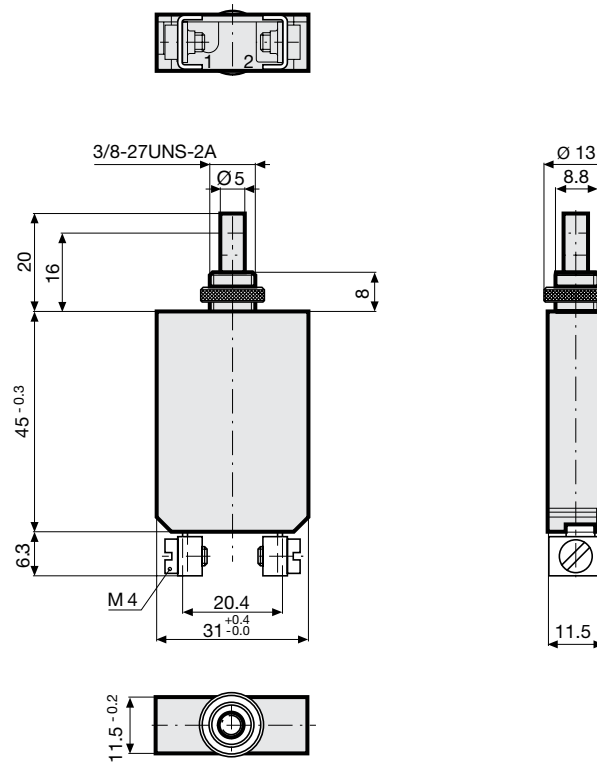

Dimension [mm]  
T13-212



Diagrams

T13-...



| Approval                                                                         |                   | Rated current | Rated Voltage AC | Rated Voltage DC |
|----------------------------------------------------------------------------------|-------------------|---------------|------------------|------------------|
|  | UL 1077           | 0.05...30 A   | 277 V            | 28 V             |
|  | CSA C22.2 No. 235 | 0.05...30 A   | 277 V            | 28 V             |
|  | EN 60934          | 0.05...30 A   | 240 V            | -                |
|  | GB 17701          | 0.05...30 A   | 240 V            | -                |

**Typical internal resistance per pole**

| Rated Current [A] | Internal Resistance [ $\Omega$ ] |
|-------------------|----------------------------------|
| 0.05              | 376.500                          |
| 0.50              | 4.40                             |
| 1.00              | 1.10                             |
| 2.00              | 0.31                             |
| 3.00              | 0.14                             |
| 4.00              | 0.068                            |
| 5.00              | 0.048                            |
| 6.00              | 0.033                            |
| 8.00              | 0.026                            |
| 9.00              | 0.0125                           |
| 10.00             | 0.0125                           |
| 11.00             | 0.0085                           |
| 12.00             | 0.0085                           |
| 13.00             | 0.0085                           |
| 14.00             | 0.007                            |
| 15.00             | 0.007                            |
| 16.00             | 0.007                            |
| 17.00             | 0.0047                           |
| 18.00             | 0.0047                           |
| 19.00             | 0.0047                           |
| 20.00             | 0.004                            |
| 21.00             | 0.0035                           |
| 22.00             | 0.003                            |
| 23.00             | 0.003                            |
| 24.00             | 0.003                            |
| 25.00             | 0.003                            |
| 26.00             | 0.0022                           |
| 27.00             | 0.002                            |
| 28.00             | 0.002                            |
| 29.00             | 0.002                            |
| 30.00             | 0.002                            |


### Effect of ambient temperature

The units are calibrated for an ambient temperature of +23°C. To determine the rated current for a lower or higher ambient temperature, use a correction factor (typical value) from the table below:

| Ambient Temperature [°C] | Correction factor |
|--------------------------|-------------------|
| -5                       | 0.88              |
| 0                        | 0.90              |
| 10                       | 0.95              |
| 23                       | 1.00              |
| 30                       | 1.05              |
| 40                       | 1.10              |
| 50                       | 1.18              |
| 60                       | 1.26              |

Example: Rated current = 5 A, Environmental temperature = 40 °C, --> Correction factor = 1.1, Resulting current = 5.5 A --> Found to next higher rated current: 6 A

### Time-Current-Curves

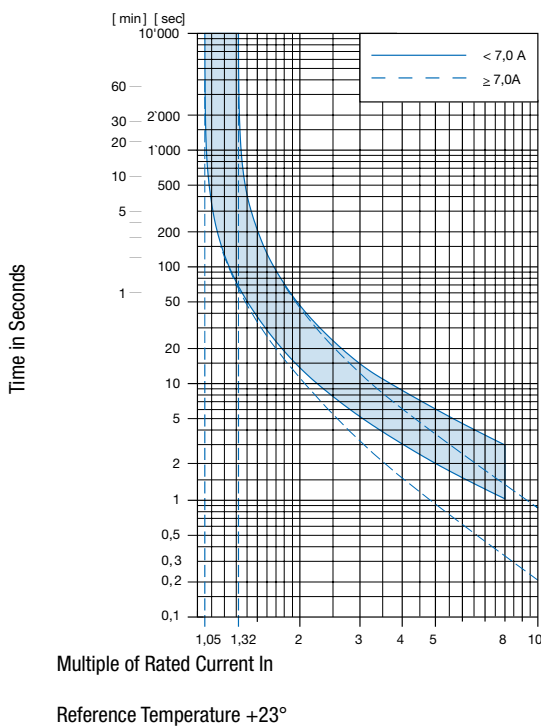

### Config. Code

T13 - 1 2 3 B - 1.23

The characters are placeholders for the correspondingly keys of selections from the key tables.

T13 - **1** 2 3 B - 1.23 = Mounting

| Mounting                            | Configuration key |
|-------------------------------------|-------------------|
| Threaded neck type with knurled nut | 2                 |

T13 - 1 **2** 3 B - 1.23 = Actuation Type

| Actuation Type | Configuration key |
|----------------|-------------------|
| Reset type     | 1                 |

T13 - 1 2 **3** B - 1.23 = Terminal

| Terminal              | Configuration key |
|-----------------------|-------------------|
| Screw clamp terminals | 2                 |

T13 - 1 2 3 **B** - 1.23 = Setting indication

| Setting indication | Configuration key |
|--------------------|-------------------|
| Setting indication | R                 |

T13 - 1 2 3 B - **1.23** = Rated current

| Rated current | Configuration key |
|---------------|-------------------|
| 0.05 A        | 0.05              |
| 0.1 A         | 0.1               |
| 0.15 A        | 0.15              |
| 0.2 A         | 0.2               |
| 0.3 A         | 0.3               |
| 0.4 A         | 0.4               |
| 0.5 A         | 0.5               |
| 0.6 A         | 0.6               |
| 0.7 A         | 0.7               |
| 0.8 A         | 0.8               |
| 0.9 A         | 0.9               |
| 1.0           | 1                 |
| 1.1 A         | 1.1               |
| 1.2 A         | 1.2               |
| 1.3 A         | 1.3               |
| 1.4 A         | 1.4               |
| 1.5 A         | 1.5               |
| 1.6 A         | 1.6               |
| 1.7 A         | 1.7               |
| 1.8 A         | 1.8               |
| 1.9 A         | 1.9               |
| 2.0 A         | 2                 |
| 2.1 A         | 2.1               |
| 2.3 A         | 2.3               |
| 2.5 A         | 2.5               |
| 2.8 A         | 2.8               |
| 3.0 A         | 3                 |
| 3.3 A         | 3.3               |

Other rated currents on request

| Rated current | Configuration key |
|---------------|-------------------|
| 3.5 A         | 3.5               |
| 4.0 A         | 4                 |
| 4.5 A         | 4.5               |
| 5.0 A         | 5                 |
| 5.5 A         | 5.5               |
| 6.0           | 6                 |
| 6.5 A         | 6.5               |
| 7.0 A         | 7                 |
| 7.5 A         | 7.5               |
| 8.0 A         | 8                 |
| 8.5 A         | 8.5               |
| 9.0 A         | 9                 |
| 9.5 A         | 9.5               |
| 10.0 A        | 10                |
| 11.0 A        | 11                |
| 12.0 A        | 12                |
| 13.0 A        | 13                |
| 14.0 A        | 14                |
| 15.0 A        | 15                |
| 16.0 A        | 16                |
| 17.0 A        | 17                |
| 18.0 A        | 18                |
| 19.0 A        | 19                |
| 20.0 A        | 20                |
| 22.0 A        | 22                |
| 25.0 A        | 25                |
| 28.0 A        | 28                |
| 30.0 A        | 30                |

Other rated currents on request

### Variants

| Rated current | Setting indication | Config. Code | Order Number              |
|---------------|--------------------|--------------|---------------------------|
| 16.0 A        |                    | T13-212-16   | <a href="#">4411.0012</a> |
| 30.0 A        |                    | T13-212-30   | <a href="#">4411.0067</a> |
| 12.0 A        |                    | T13-212-12   | <a href="#">4411.0099</a> |
| 11.0 A        | ●                  | T13-212R-11  | <a href="#">4411.0210</a> |
| 15.0 A        | ●                  | T13-212R-15  | <a href="#">4411.0211</a> |

Availability for all products can be searched real-time: <https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

**Packaging Unit** 20 Pcs

**Accessories**

**Description**



T-Line Accessories  
Accessories to T-Line