
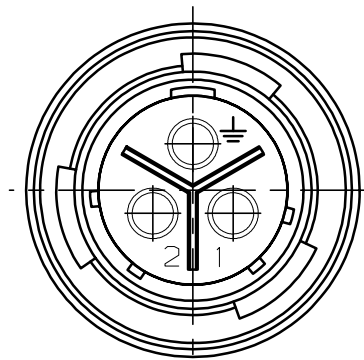


DIT IS ONZE EIGENDOM EN MAG NOCH NAGEMAAKT, HERDRUKT, OVERGEMAAKT, AAN DERDEN, NOCH VOOR FABRIKATIE GEBRUIKT WORDEN, ZONDER ONZE SCHRIFTELIJKE TOELATING. BIJ NIET GEBRUIK IS DE TERUGZENDING VERPLICHT.

THIS IS OUR EXCLUSIVE PROPERTY. IT IS NOT TO BE COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY, NOR USED FOR MANUFACTURING WITHOUT OUR WRITTEN CONSENT, AND HAS TO BE RETURNED TO US IN CASE OF NO USAGE

REV.	DATE	DESCRIPTION	BY	C'K'D'
00	28/09/07	FIRST ISSUE	R Ch	
A	16/08/10	Reverse dimension E max	R Ch	

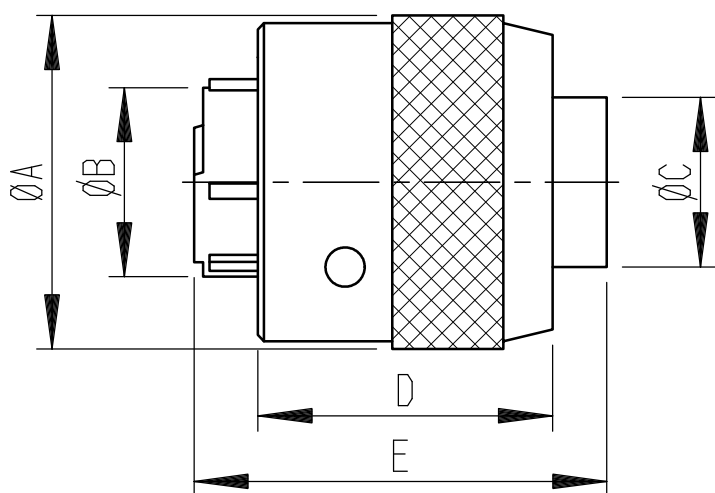

Catalog Number	Dimensions				
	A±0.2	B±0.15	C±0.15	D±0.2	E max
UTG6103PN	21.6	12.2	10.9	19.1	31.6
UTG6103SN	21.6	12.2	10.9	19.1	26.8

MATERIAL :

BODY : GLASS-FILLED POLYAMIDE; COLOUR BLACK UL94-V0.
 BAYONET RING : CUZN ALLOY NICKEL PLATED.

PERFORMANCE CHARACTERISTICS :




OPERATING TEMPERATURE : -55°C TO +125°C.
 INSULATION RESISTANCE : 5000 M Ohm MIN.
 TEST POTENTIAL : 2000 VAC EFF.
 DESIGN : ACCORDING TO VDE 0110 GROUP C/220V.

NOTES :

- CONNECTOR ACCEPTS SIZE 16 STRIP FORMED, MACHINED AND SUBMINIATURE COAXIAL PIN AND SOCKET CONTACTS.
- CONTACTS TO BE ORDERED SEPARATELY - SEE DRAWINGS BSA 060291, BSA 060101, BSA 060152

BS, A , 202360, 003

GEN. ST.	01	02	03	04	05	06	07	08	0D	50	60	70	80	90																	
INT. ST.	10	11	12	13	14	18	20	31	32	33	34	38	39	40	42	43	44	45	46	48	56	70	72	73	75	76	81	82	83	84	88

1DEC ±0,2 1DEC 2DEC ±0,1 2DEC ANGLES ±1' HOEKEN	APPR.	DATE	SIGN.	PLUG UTG BANTAM SIZE 10-3		
	DRAFT	28/09/07	ROUILLARD	CAT. No. UTG6103*N		
WE RESERVE THE RIGHT TO CHANGE DIMENSIONS OR REQUIREMENTS WITHOUT PRIOR NOTICE.	PROD. MGR.			 SOURIAU Route Nationale 23 72470 CHAMPAGNE	SCALE	
	PR. ENG. MGR.					
ALL DIMENSIONS IN MM	PR. MGT. MGR.					
  ALLE AFMETINGEN IN MM	REFERENCES / REFERENTIES			BS-A-202360-003 DRAWING NR. CUSTOMER DRAWING REVISION		