

HEAT SINK -HEAT SINK CLIP EMI SPRINGS -

В

NOTES: 1. MATERIALS:

2. PLATING: CAGE: NICKEL EMI SPRINGS: NICKEL

TEMPERATURE:

CAGE: COPPER ALLOY

HEAT SINK: NICKEL

HEAT SINK CLIP: N/A

OPERATIONAL: −40°C~+85°C


4. FOR PRODUCT SPECIFICATIONS SEE PR043-01.


5. MATES WITH SFP MSA COMPLIANT TRANSCEIVERS.

STORAGE: -55℃~+105℃

EMI SPRINGS: COPPER ALLOY HEAT SINK: ALUMINUM

HEAT SINK CLIP: STAINLESS STEEL



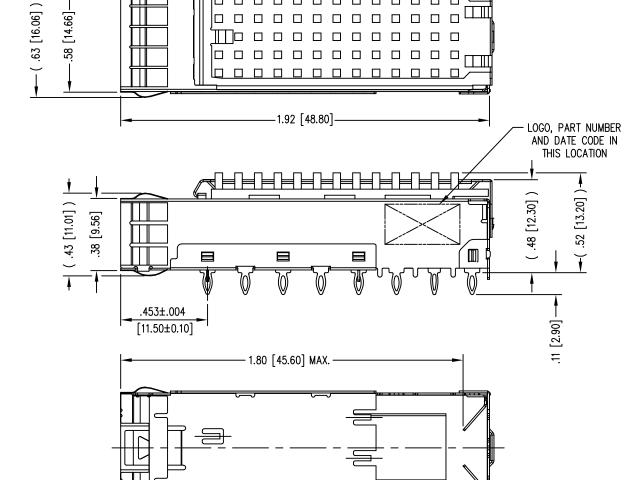

7-24-17	A1	11049	TRM
8-11-17	A2	11061	TRM

В

Α

PART NUMBER

SS-79100-002

THIRD ANGLE PROJECTION DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE UNLESS OTHERWISE SPECIFIED

DIMENSIONS INCHES [METRIC] TOLERANCES ARE: ANGLES ± 2°

1 PLC. DEC. ±.010" [±0.25] 2 PLC. DEC. ±.008" [±0.20] 3 PLC. DEC. ±.004" [±0.10] DO NOT SCALE DRAWING 1 OF 2

CONNECTOR a bel group

11118 Susquehanna Trail South Glen Rock, PA 17327-9199 (717) 235-7512

http://www.stewartconnector.com


SFP+ 1X1 CAGE (WITH HEAT SINK), PRESS FIT

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF STEWART CONNECTOR AND SHALL NOT BE REPRODUCED. COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONSENT OF STEWART CONNECTOR. ONE OR MORE U.S. PATENTS MAY APPLY TO THIS PRODUCT. FOR DETAILS, PLEASE VISIT: HTTP://BELFUSE.COM/STEWART/STEWART_PATENTS/

DATE 6-5-17 TRM DATE 6-30-17 APPD BY: DHG DWG NO. REV. CT790002

RoHS

AutoCAD

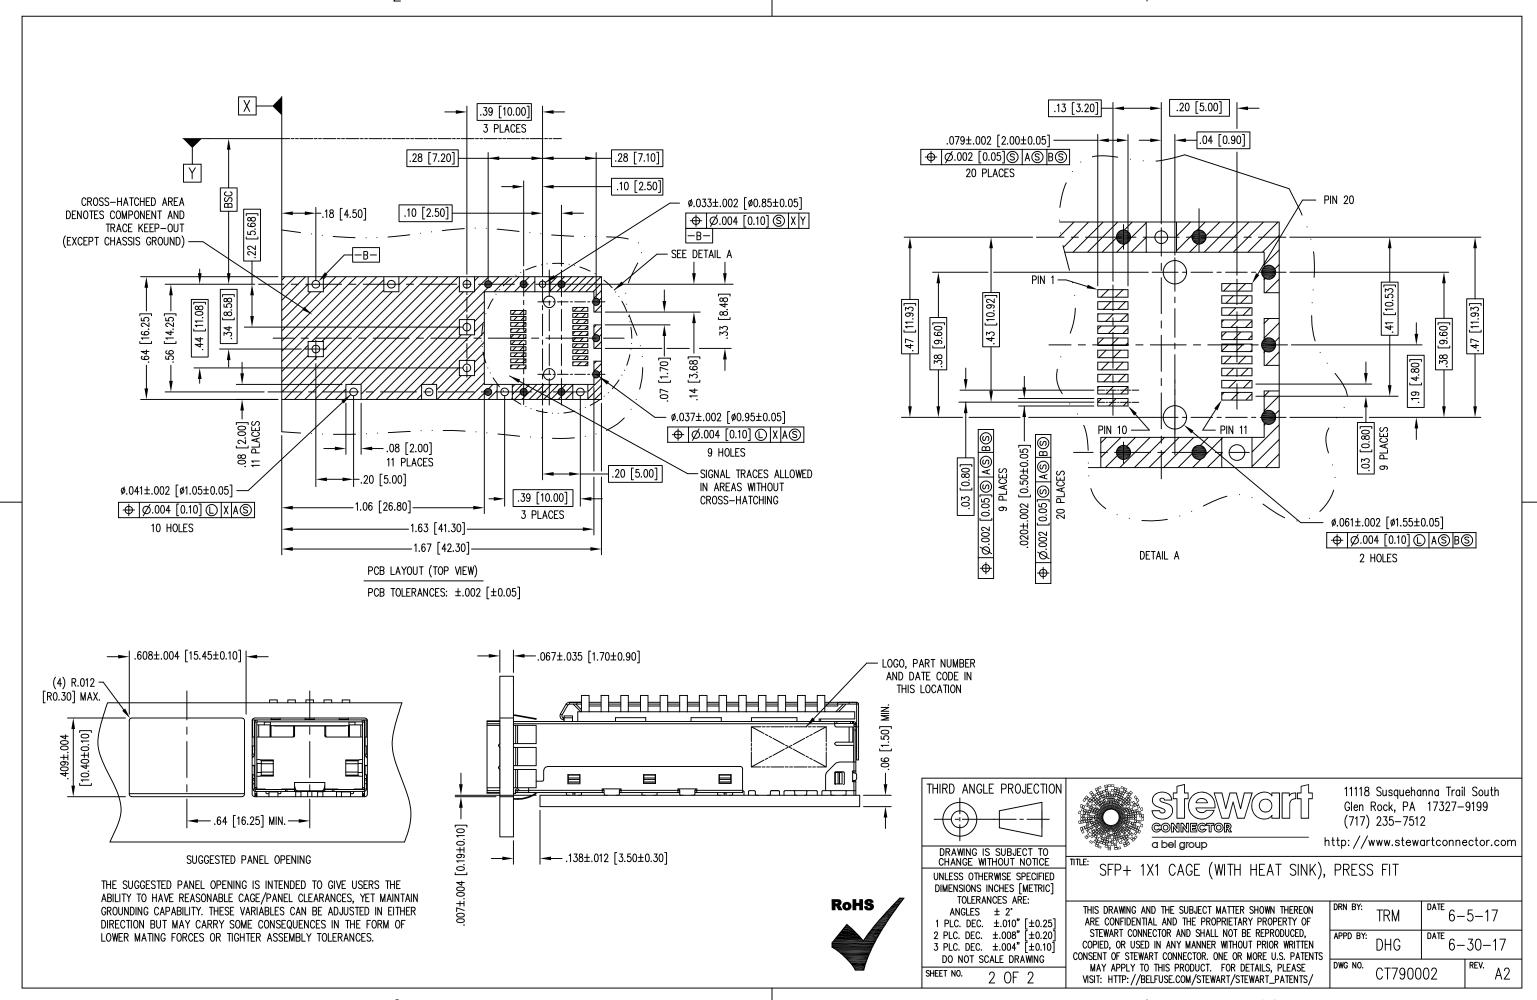

_

В

AutoCAD

В

Α