

Switchcraft®

[Previous Page](#) | [Return to Index](#) | [Next Page](#)

Bantam TT Patchcords



Features and Benefits

Switchcraft single 3-conductor TT audio patch cords have now been designed with a low capacitance cable which at 110 Ohms is ideal for digital audio AES/EBU and SMPTE time code patching and conventional analog. The overall jacket is now flexible in eight colors. The nickel plated plugs allow for non-tarnishing and the

overmolded handle-boot reduces strain off the cable when pulled.

Switchcraft dual 3-conductor TT patch cords have also been redesigned with an overall flexible cable and six colors to choose from. Like the single TT the dual plugs are nickel plated and flexible. These cords work with all Switchcraft TT stereo spaced bays for analog audio and RS422 data patching.

Broadcast Series

3-Conductor TT Patch Cords: Analog / AES/EBU Audio and RS422 Patching




Part Numbering System

Single Bantam TT



Dual Bantam TT

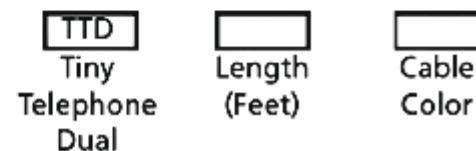

Colors	Color Code	Standard Foot Lengths
		1'
Black	BK	2'
Red	R	3'
Orange	O	4'

Yellow	Y	5'
Green	GN	6'
Blue	BL	7'
Purple	P	8'
Gray	GY	9'
		10'

Custom lengths are available as special order assemblies.

1 meter is equal to 3.28 feet.

TTD series not available in Purple or Gray.

Specifications:

Plug Handle: Is molded thermoplastic.

Plugs: Tip Rod, Ring and Sleeve - Copper Alloy.

Cable: 26 AWG (30 x 40) OFBC, 110 Ohm Low Capacitance Jacket is Matte PVC.

[Previous Page](#) | [Return to Index](#) | [Next Page](#)

| [Switchcraft home](#)

[About Us](#) | [Products](#) | [What's New](#) | [Search](#) | [Contact Us](#)