

## 150mA, 85V Switching Diode Array

### FEATURES

- Fast switching device ( $t_{rr} < 4\text{ns}$ )
- Moisture sensitivity level: level 1, per J-STD-020
- RoHS Compliant
- Halogen-free according to IEC 61249-2-21


### APPLICATIONS

- For switching power supply

### MECHANICAL DATA

- Case: SOT-323
- Molding compound meets UL 94 V-0 flammability rating
- Terminal: Matte tin plated leads, solderable per J-STD-002
- Meet JESD 201 class 1A whisker test
- Weight: 5mg (approximately)

KEY PARAMETERS		
PARAMETER	VALUE	UNIT
$I_F$	150	mA
$V_{RRM}$	85	V
$I_{FSM}$ at $t=1\mu\text{s}$	4	A
$V_F$ at $I_F=150\text{mA}$	1.25	V
$T_{J\text{MAX}}$	150	°C
Package	SOT-323	



ABSOLUTE MAXIMUM RATINGS ( $T_A = 25^\circ\text{C}$ unless otherwise noted)			
PARAMETER	SYMBOL	VALUE	UNIT
Marking code on the device		A7	
Power dissipation	$P_D$	200	mW
Repetitive peak reverse voltage	$V_{RRM}$	85	V
Reverse voltage	$V_R$	75	V
Repetitive peak forward current	$I_{FRM}$	500	mA
Forward current	Single diode load	150	mA
	Double diodes load	130	
Non-Repetitive peak forward surge current	$t=1\mu\text{s}$	4	A
	$t=1\text{ms}$	1	
	$t=1\text{s}$	0.5	
Junction temperature range	$T_J$	-55 to +150	°C
Storage temperature range	$T_{STG}$	-55 to +150	°C

<b>THERMAL PERFORMANCE</b>			
PARAMETER	SYMBOL	TYP	UNIT
Junction-to-ambient thermal resistance	$R_{\theta JA}$	625	$^{\circ}C/W$

<b>ELECTRICAL SPECIFICATIONS</b> ( $T_A = 25^{\circ}C$ unless otherwise noted)					
PARAMETER	CONDITIONS	SYMBOL	MIN	MAX	UNIT
Forward voltage per diode <sup>(1)</sup>	$I_F = 1mA, T_J = 25^{\circ}C$	$V_F$	-	0.715	V
	$I_F = 10mA, T_J = 25^{\circ}C$			0.855	
	$I_F = 50mA, T_J = 25^{\circ}C$			1.000	
	$I_F = 150mA, T_J = 25^{\circ}C$			1.250	
Reverse current per diode <sup>(2)</sup>	$V_R = 25V, T_J = 25^{\circ}C$	$I_R$	-	30	nA
	$V_R = 75V, T_J = 25^{\circ}C$			1	$\mu A$
	$V_R = 25V, T_J = 150^{\circ}C$			30	$\mu A$
	$V_R = 75V, T_J = 150^{\circ}C$			50	$\mu A$
Junction capacitance	1 MHz, $V_R = 0V$	$C_J$	-	1.5	pF
Reverse recovery time	$I_F = I_R = 10mA, R_L = 100\Omega, I_{RR} = 1mA$	$t_{rr}$	-	4	ns

**Notes:**

1. Pulse test with PW=0.3 ms
2. Pulse test with PW=30 ms

<b>ORDERING INFORMATION</b>		
ORDERING CODE (Note 1)	PACKAGE	PACKING
BAV99W RF	SOT-323	3K / 7" Reel
BAV99W RFG	SOT-323	3K / 7" Reel


**Note:**

1. "G" means green compound (halogen free)


**CHARACTERISTICS CURVES**

( $T_A = 25^\circ\text{C}$  unless otherwise noted)


**Fig.1 Forward Current Derating Curve**

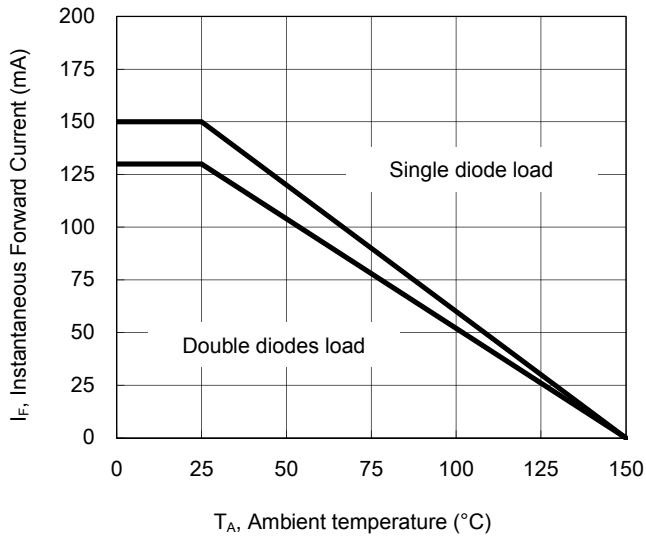

**Fig. 2 Typical Forward Characteristics**

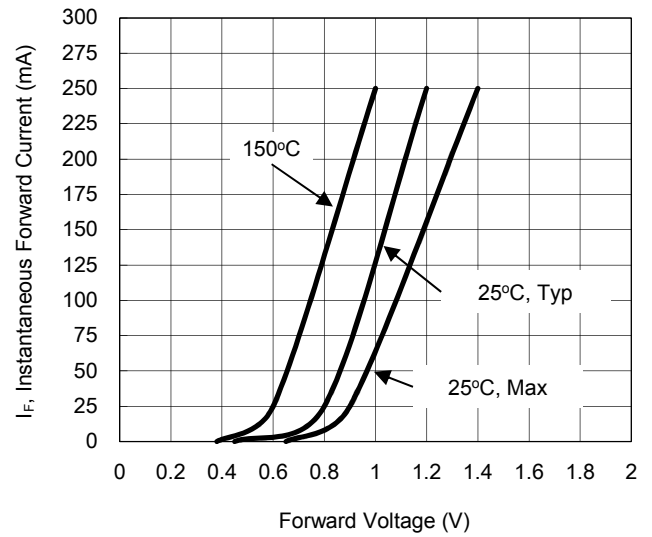


**Fig.3 Maximum Non-repetitive Peak Forward Surge Current**

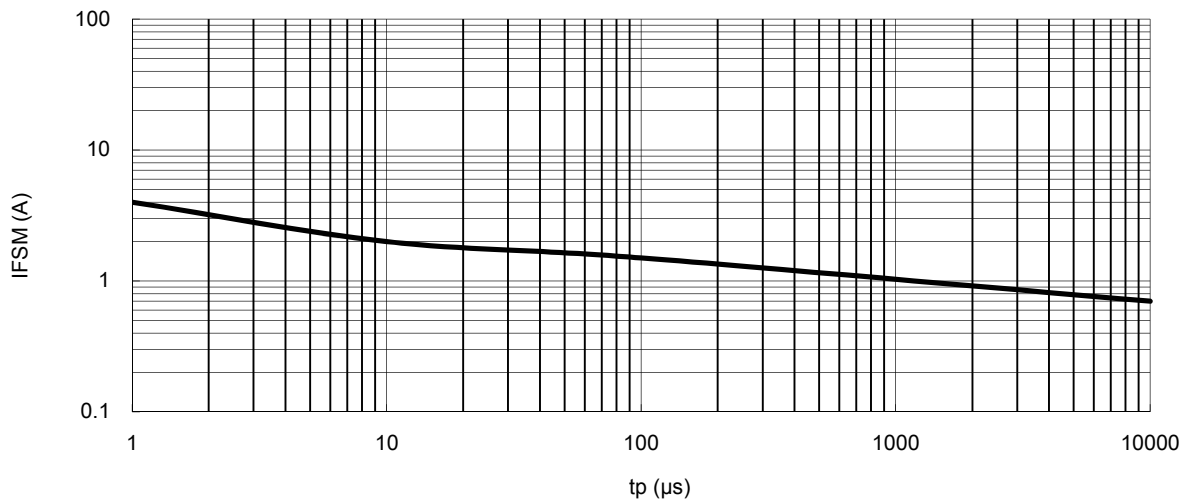


**CHARACTERISTICS CURVES**

( $T_A = 25^\circ\text{C}$  unless otherwise noted)

**Fig.4 Typical Reverse Characteristics**

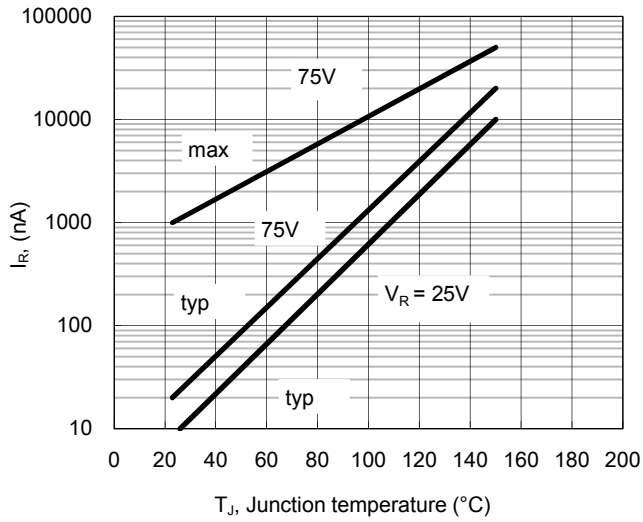


**Fig. 5 Typical Capacitance**

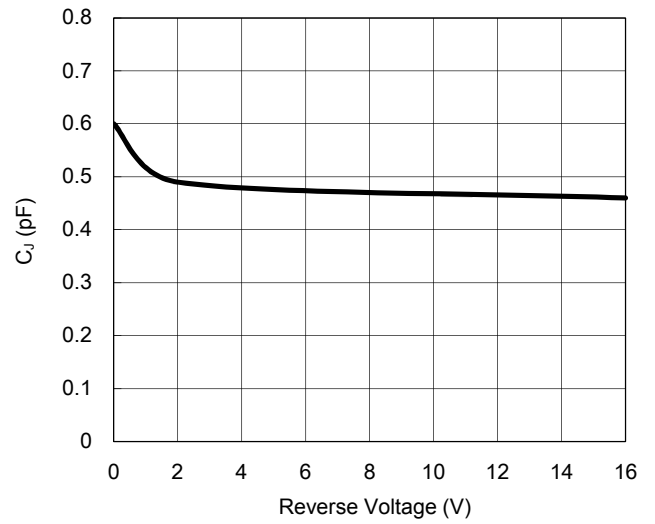


**PACKAGE OUTLINE DIMENSION**


SOT-323

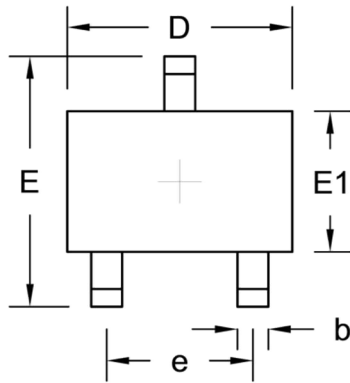

DIM.	Unit (mm)		Unit (inch)	
	Min.	Max.	Min.	Max.
A	0.80	1.10	0.031	0.043
b	0.15	0.40	0.006	0.016
D	1.80	2.20	0.071	0.087
E	2.00	2.45	0.079	0.096
E1	1.15	1.35	0.045	0.053
e	1.20	1.40	0.047	0.055



**SUGGESTED PAD LAYOUT**

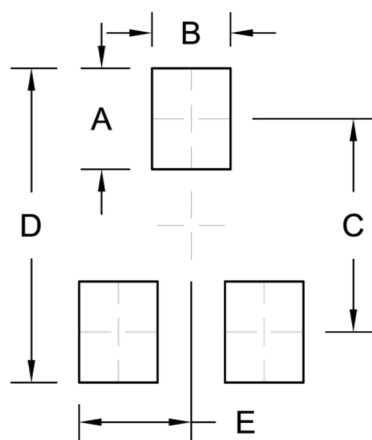

Symbol	Unit (mm)	Unit (inch)
A	0.90	0.035
B	0.70	0.028
C	1.90	0.075
D	2.80	0.110
E	1.00	0.039

## Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf assumes no responsibility or liability for any errors or inaccuracies.

Purchasers are solely responsible for the choice, selection, and use of TSC products and TSC assumes no liability for application assistance or the design of Purchasers' products.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.