


HER301 - HER307
3.0AMPS High Efficient Rectifiers
DO-201AD

Features

- ✧ High efficiency, Low VF
- ✧ High current capability
- ✧ High reliability
- ✧ High surge current capability
- ✧ For use in low voltage, high frequency inverter, free wheeling, and polarity protection application
- ✧ Green compound with suffix "G" on packing code & prefix "G" on datecode

Mechanical Data

- ✧ Case: Molded plastic
- ✧ Epoxy: UL 94V-0 rate flame retardant
- ✧ Lead: Pure tin plated, lead free, solderable per MIL-STD-202, Method 208 guaranteed
- ✧ Polarity: Color band denotes cathode
- ✧ High temperature soldering guaranteed: 260°C/10s / .375", (9.5mm) lead lengths at 5 lbs, (2.3kg) tension
- ✧ Weight: 1.2 grams

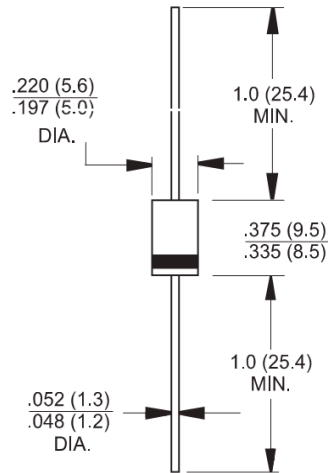

Dimensions in inches and (millimeters)

Marking Diagram



- HER30X = Specific Device Code
- G = Green Compound
- Y = Year
- WW = Work Week

Maximum Ratings and Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

| Type Number | Symbol | HER 301 | HER 302 | HER 303 | HER 304 | HER 305 | HER 306 | HER 307 | Unit |
|--|---|---------------|---------|---------|---------|---------|---------|---------|--------------|
| Maximum Repetitive Peak Reverse Voltage | V_{RRM} | 50 | 100 | 200 | 300 | 400 | 600 | 800 | V |
| Maximum RMS Voltage | V_{RMS} | 35 | 70 | 140 | 210 | 280 | 420 | 560 | V |
| Maximum DC Blocking Voltage | V_{DC} | 50 | 100 | 200 | 300 | 400 | 600 | 800 | V |
| Maximum Average Forward Rectified Current .375 (9.5mm) Lead Length @ $T_A=55^\circ C$ | $I_{F(AV)}$ | 3 | | | | | | | A |
| Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method) | I_{FSM} | 150 | | | | | | | A |
| Maximum Instantaneous Forward Voltage (Note 1) @ 3 A | V_F | 1.0 | | | 1.3 | | 1.7 | | V |
| Maximum Reverse Current @ Rated VR $T_A=25^\circ C$ $T_A=125^\circ C$ | I_R | 10 250 | | | | | | | uA |
| Maximum Reverse Recovery Time (Note 2) | T_{rr} | 50 | | | | | 75 | | nS |
| Typical Junction Capacitance (Note 3) | C_j | 70 | | | | | 50 | | pF |
| Typical Thermal Resistance | $R_{\theta JA}$ $R_{\theta JC}$ $R_{\theta JL}$ | 40 7 10 | | | | | | | $^\circ C/W$ |
| Operating Temperature Range | T_J | - 65 to + 150 | | | | | | | $^\circ C$ |
| Storage Temperature Range | T_{STG} | - 65 to + 150 | | | | | | | $^\circ C$ |

Note 1: Pulse Test with PW=300 usec, 1% Duty Cycle

Note 2: Reverse Recovery Test Conditions: $I_F=0.5A$, $I_R=1.0A$, $IRR=0.25A$

Note 3: Measured at 1 MHz and Applied Reverse Voltage of 4.0V D.C.

RATINGS AND CHARACTERISTIC CURVES (HER301 THRU HER307)

FIG. 1 MAXIMUM FORWARD CURRENT DERATING CURVE

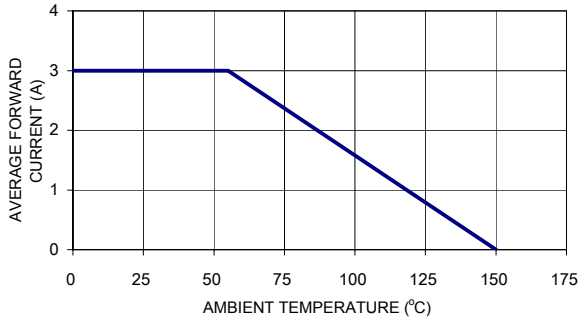


FIG. 2 TYPICAL REVERSE CHARACTERISTICS

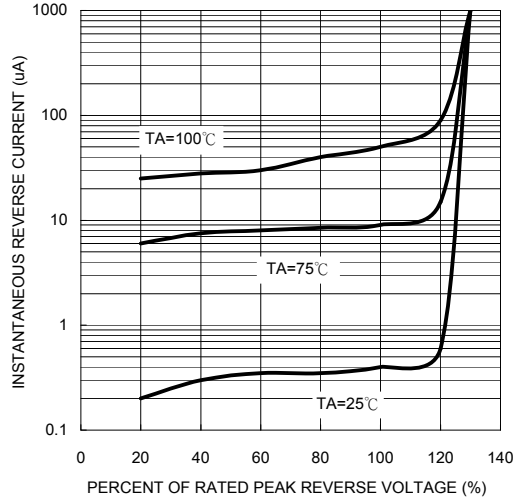


FIG. 3 MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

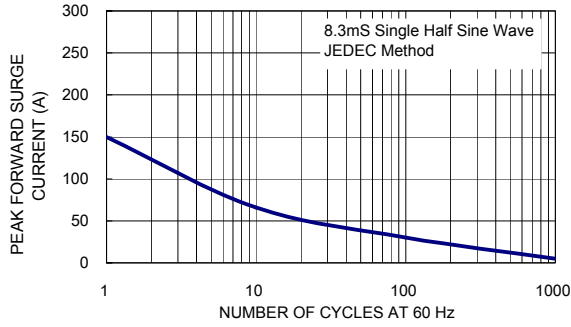


FIG. 5 TYPICAL FORWARD CHARACTERISTICS

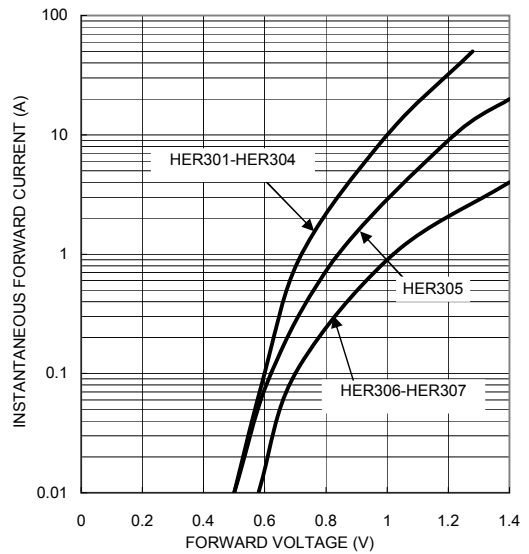


FIG. 4 TYPICAL JUNCTION CAPACITANCE

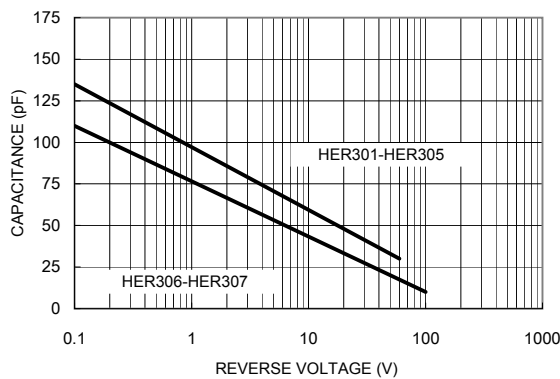


FIG. 6- REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

