

- High surge current capability
- Low power loss, high efficiency
- Moisture sensitivity level: level 1, per J-STD-020
- Compliant to RoHS Directive 2011/65/EU and in accordance to WEEE 2002/96/EC
- Halogen-free according to IEC 61249-2-21 definition



MECHANICAL DATA

Case: SOD123HE

SOD123HE

Molding compound, UL flammability classification rating 94V-0
Base P/N with suffix "G" on packing code - halogen-free, RoHS compliant

Terminal: Matte tin plated leads, solderable per JESD22-B102
Meet JESD 201 class 1A whisker test

Polarity: Indicated by cathode band

Weight: 0.022g (approximately)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	S1JLS	S1KLS	S1M
Marking code		1JLS	1KLS	1M
Maximum repetitive peak reverse voltage	V_{RRM}	600	800	1000
Maximum RMS voltage	V_{RMS}	420	560	700
Maximum DC blocking voltage	V_{DC}	600	800	1000
Maximum average forward rectified current	$I_{F(AV)}$	1.2		
Peak forward surge current, 8.3 ms single half sine-wave superimposed on rated load	I_{FSM}	50		
Maximum instantaneous forward voltage (Note 1) @ 1.2 A	V_F	1.3		
Maximum reverse current @ rated VR $T_J=25^{\circ}\text{C}$ $T_J=125^{\circ}\text{C}$	I_R	5 150		
Typical thermal resistance	$R_{\theta JL}$ $R_{\theta JA}$	26 74		
Operating junction temperature range	T_J	- 55 to +150		
Storage temperature range	T_{STG}	- 55 to +150		

Note 1: Pulse test with $PW=300\mu\text{s}$, 1% duty cycle

Document Number: DS_D1401012





Note 1: "x" defines voltage from 600V (S1JLS) to 1000V (S1MLS)


Note 2: For SOD123HE Packing code (Whole series with green compound)

EXAMPLE				
PREFERRED P/N	PART NO.	PACKING CODE	GREEN COMPOUND CODE	DESCRIPTION
S1MLS RVG	S1MLS	RV	G	Green compound


RATINGS AND CHARACTERISTICS CURVES

(TA=25°C unless otherwise noted)

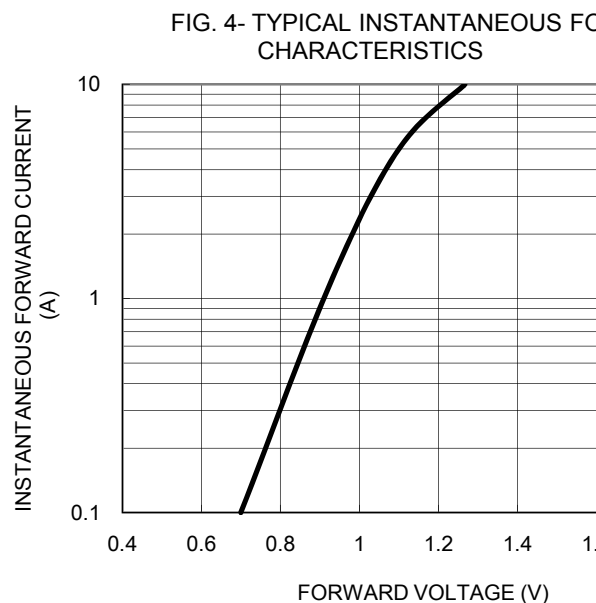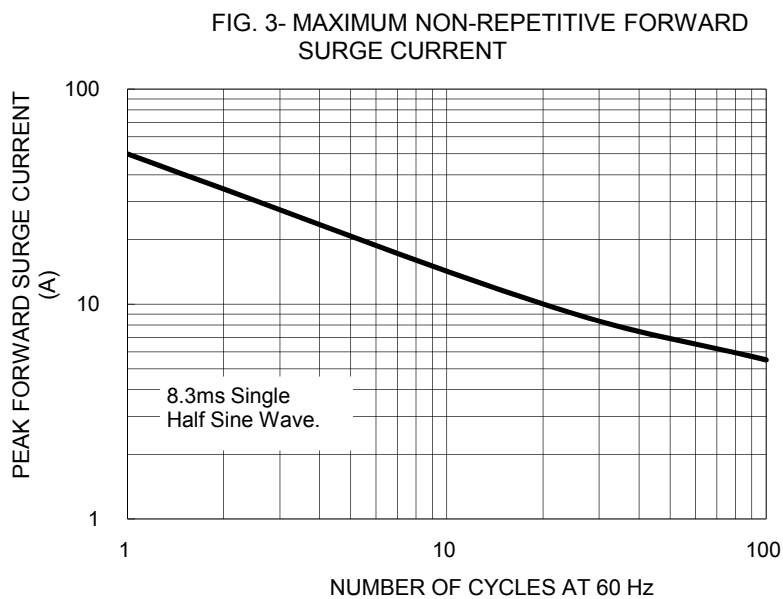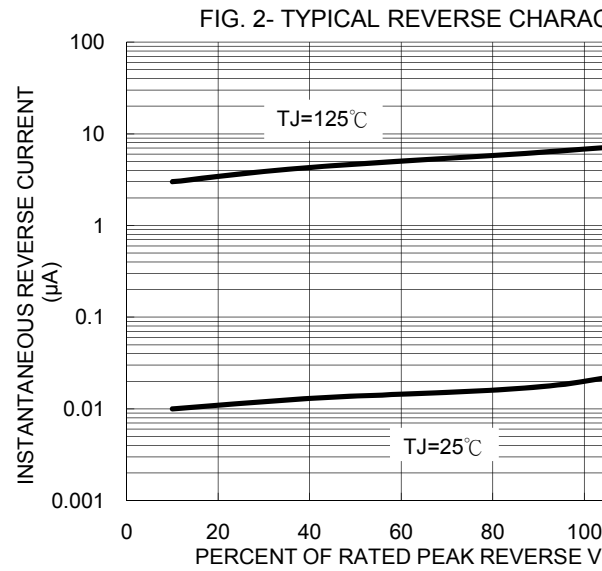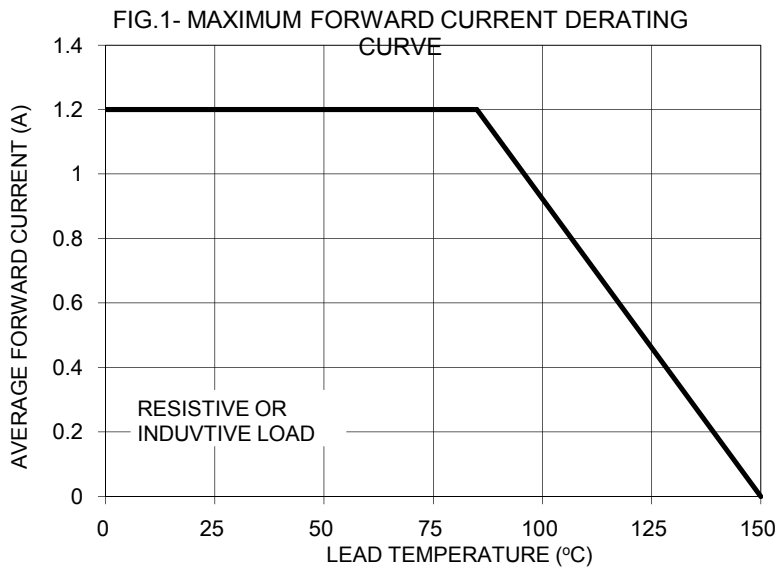

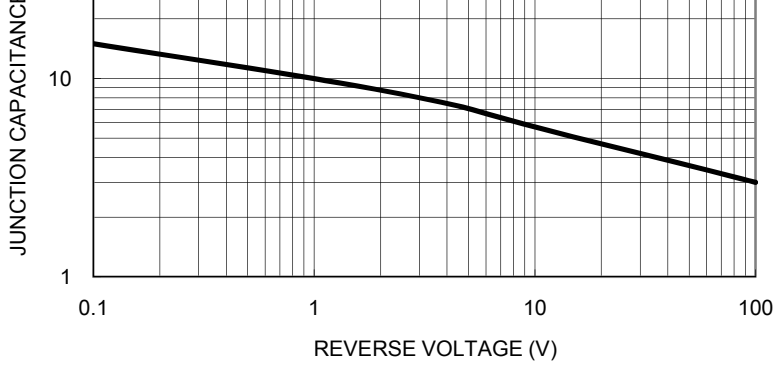


PACKAGE OUTLINE DIMENSIONS

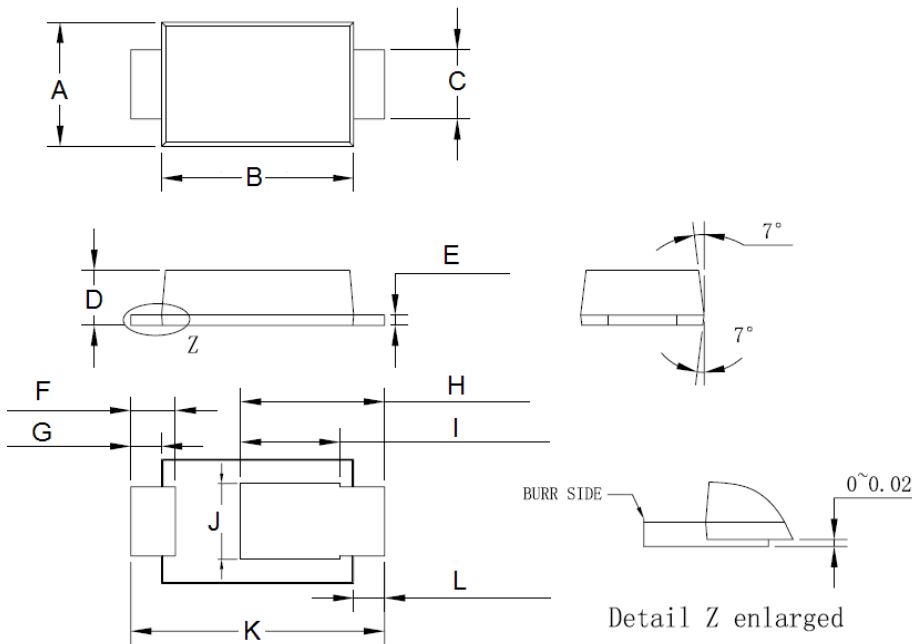


DIM.	Unit (mm)		Unit
	Min	Max	Min
A	1.65	1.95	0.065
B	2.60	3.00	0.102
C	0.85	1.15	0.033
D	0.75	0.85	0.030
E	0.10	0.20	0.004
F	0.55	0.75	0.022
G	0.35	0.55	0.014
H	1.90	2.30	0.075
I	1.35	1.55	0.053
J	0.95	1.25	0.037
K	3.50	3.90	0.138
L	0.35	0.55	0.014

SUGGESTED PAD LAYOUT

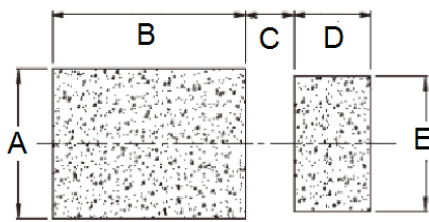

Symbol	Unit (mm)	Unit (inch)
A	1.40	0.055
B	2.20	0.087
C	1.00	0.039
D	0.90	0.035
E	1.40	0.055

MARKING DIAGRAM



P/N = Marking Code
 YW = Date Code
 F = Factory Code