





RoHS COMPLIANCE



TS-6P

Features


- ◇ UL Recognized File # E-326243
- ◇ Glass passivated junction
- ◇ Ideal for printed circuit board
- ◇ High case dielectric strength of 2000V_{RMS}
- ◇ Plastic material has Underwriters Laboratory Flammability Classification 94V-0
- ◇ Typical IR less than 0.1uA
- ◇ High surge current capability to 200A
- ◇ High temperature soldering guaranteed: 260 °C / 10 seconds at 5 lbs.,(2.3kg) tension
- ◇ Green compound with suffix "G" on packing code & prefix "G" on datecode.

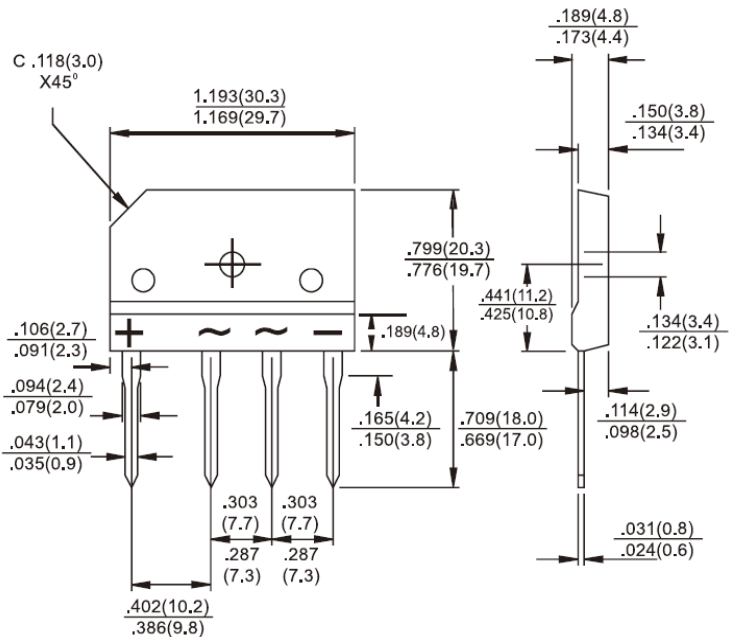

Mechanical Data

- ◇ Case: Molded plastic body
- ◇ Terminals: Pure tin plated, Lead free, Leads solderable per MIL-STD-202, Method 208
- ◇ Weight: 7.15 grams
- ◇ Mounting torque : 8.17 in-lbs Max.

Dimensions in inches and (millimeters)



Marking Diagram

- TS10P0XG = Specific Device Code
- G = Green Compound
- Y = Year
- WW = Work Week

Maximum Ratings and Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	Symbol	TS10P01G	TS10P02G	TS10P03G	TS10P04G	TS10P05G	TS10P06G	TS10P07G	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current @ $T_C=110^\circ C$	$I_{F(AV)}$	10							A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	200							A
Rating of fusing ($t < 8.3ms$)	I^2t	166							A ² S
Maximum Instantaneous Forward Voltage (Note 1) @ 5 A @ 10 A	V_F	1.0 1.1							V
Maximum DC Reverse Current @ $T_A=25^\circ C$ at Rated DC Blocking Voltage @ $T_A=125^\circ C$	I_R	10 500							 uA
Typical Junction Capacitance Per Leg (Note 2)	C_j	77							pF
Typical Thermal Resistance	$R_{\theta JC}$	1.4							°C/W
Operating Temperature Range	T_J	- 55 to + 150							°C
Storage Temperature Range	T_{STG}	- 55 to + 150							°C

Note 1 : Pulse Test with PW=300 usec, 1% Duty Cycle

Note 2 : Measured at 1MHz and applied Reverse bias of 4.0V DC.

RATINGS AND CHARACTERISTIC CURVES (TS10P01G THRU TS10P07G)

FIG. 1 MAXIMUM DERATING CURVE FOR OUTPUT CURRENT

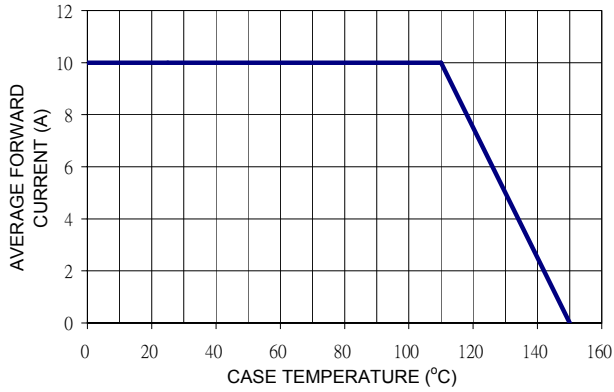


FIG. 2 MAXIMUM FORWARD SURGE CURRENT PER LEG

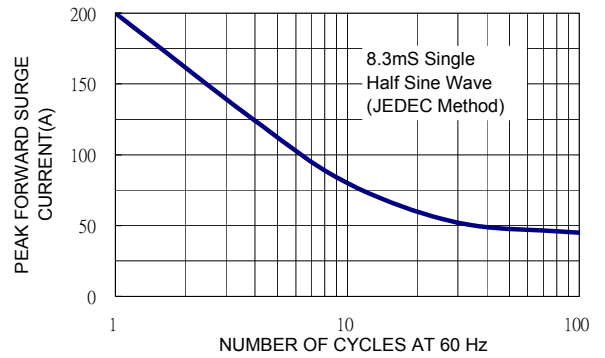


FIG. 3 TYPICAL REVERSE CHARACTERISTICS PER LEG

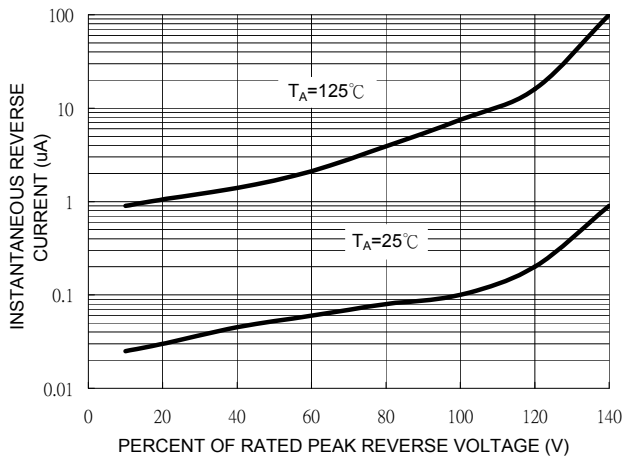


FIG. 4 TYPICAL FORWARD CHARACTERISTICS PER LEG

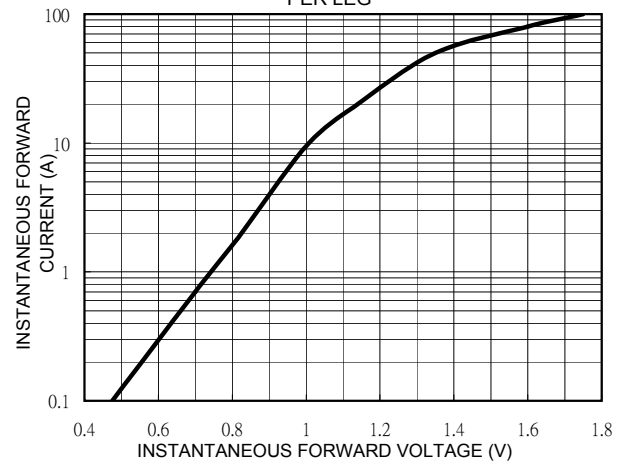


FIG. 5 TYPICAL JUNCTION CAPACITANCE

