

# **SPECIFICATION**

Part No. : GP.1575.18.2.A.02

Product Name : 2mm thick GPS/GALILEO Patch Antenna, 1575MHz

Features : 18mm\*18mm\*2mm Halogen Free RoHS Compliant





### **1. Introduction**

This miniaturized ceramic GPS/GALILEO patch antenna is based on smart *XtremeGain*<sup>™</sup> technology. It is mounted via pin and double-sided adhesive and has been selected as optimal solution for the customer device environment.

### **2. Specification Table**


| No | Parameter             | Specification                    |                  |  |  |
|----|-----------------------|----------------------------------|------------------|--|--|
| 1  | Center Frequency      | 1575MHz +/- 3MHz                 |                  |  |  |
| 2  | Impedance             | 50Ω                              |                  |  |  |
| 3  | Bandwidth             | 5 MHz min Return Loss <-10dB     |                  |  |  |
| 4  | VSWR                  | 1.5 max                          | Center Frequency |  |  |
| 5  | Gain toward Zenith    | -0.5 dBic typ.                   |                  |  |  |
| 6  | Gain at 10°Elevation  |                                  |                  |  |  |
| 7  | Axial Ratio           | 3dB Max.                         |                  |  |  |
| 8  | Polarization          | Right Hand Circular Polarization |                  |  |  |
| 9  | Frequency Temperature | $0 \pm 20$ mm/ $\%$ C            |                  |  |  |
| 9  | Coefficient ( Tf )    | 0 ± 20ppm/°C                     |                  |  |  |
| 10 | Operating Temperature | -40°C to +85°C                   |                  |  |  |

Original Patch Specification tested on 50\*50mm ground plane




## **3. Electrical Specification**

#### 3.1. Smith Chart

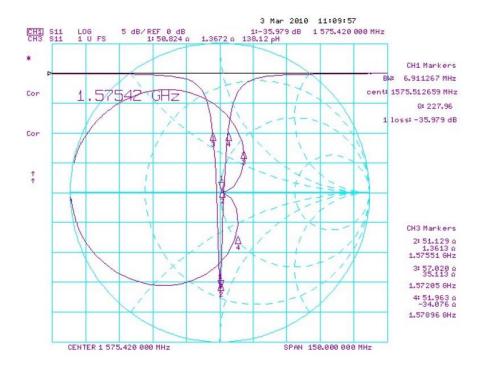


### **3.2. Efficiency**

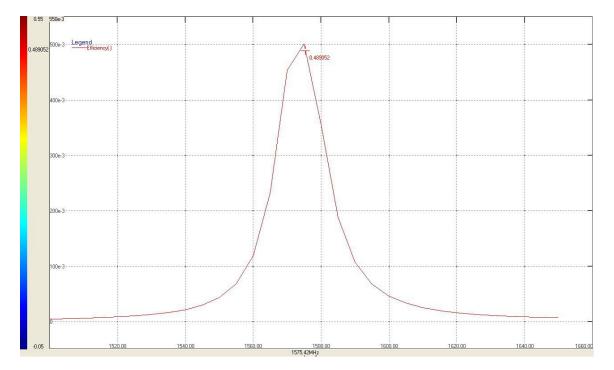




## 4. 2D Radiation Patterns


#### 4.1. XZ Plane Radiation

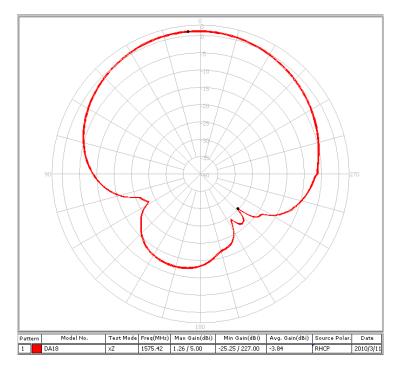

### 4.2. YZ Plane Radiation

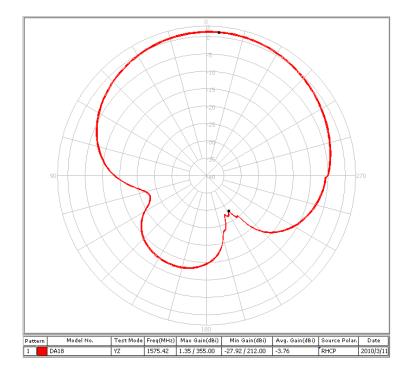




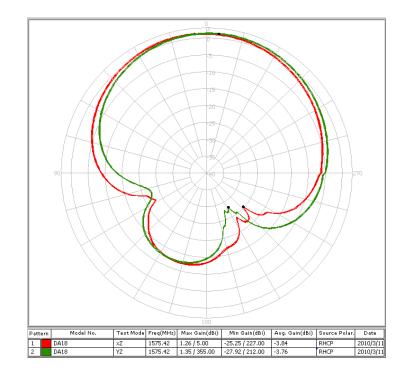

#### 4.3. XZ Plane Radiation




## 5. Mechanical Drawing (Unit: mm)

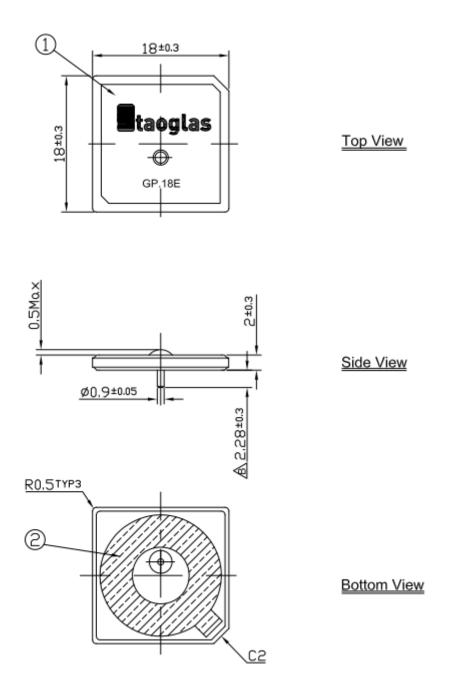

| L |   | Name                  | Material   | Finish      | QTY | NOTES:                       |
|---|---|-----------------------|------------|-------------|-----|------------------------------|
|   | 1 | Patch 18x18x2         | Ceramic    | Clear       | 1   | 1.Double sided adhesive area |
| Γ | 2 | Double sided Adhesive | NITTO 5015 | White Liner | 1   |                              |




#### **5.1. Adhesive Thickness**

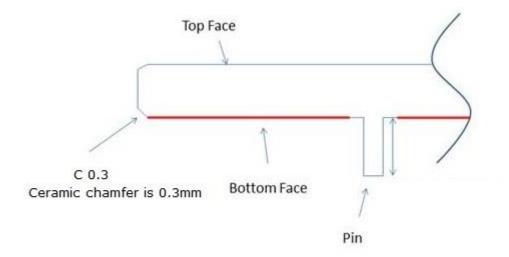

Red Line shows the adhesive without Liner - thickness 0.08~0.1mm


#### **5.2. Layout Dimension**

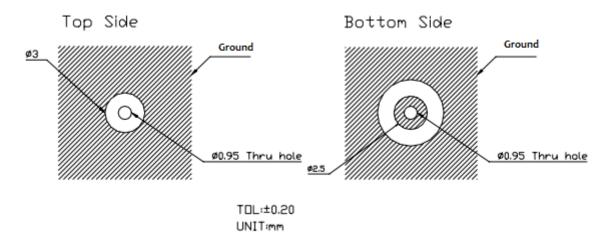

\*Note Layout Dimensions may be affected by the thickness of the PCB




### 6. Test Jig and Dimension

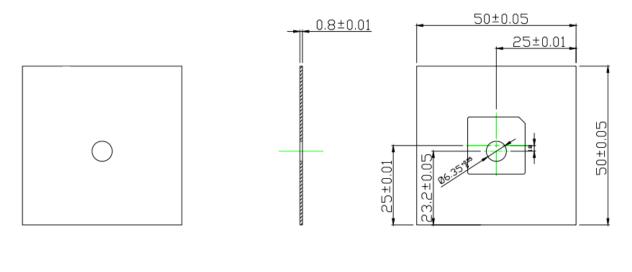

BOTTOM-SIDE

TOP-SIDE

#### **6.1. Test Fixture Antenna Setup and Measurements**

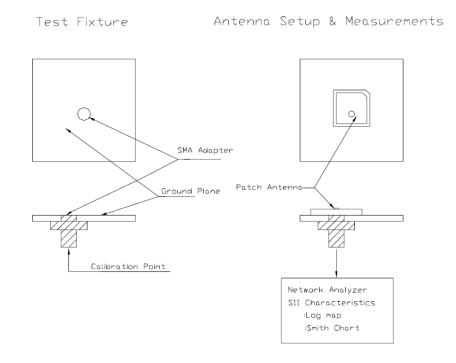




### 7. Packaging

#### GP.1575.18.2.A.02

#### **Packaging Specifications**

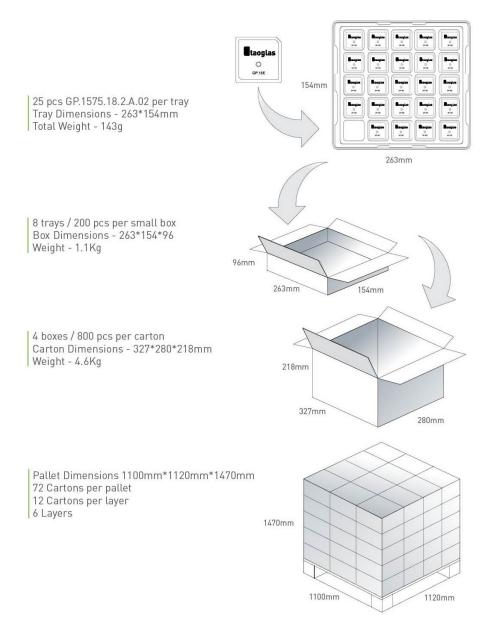

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein.

Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Copyright © Taoglas Ltd.