




300W and 400W, High Density AC-DC, digital power solution

Features	Benefits
• High peak power rating	Reduces size of power supply needed
• Full Digital Control	Improves Product Performance
• High Efficiency	Minimises heat in system
• Temperature controlled fan option	Reduces noise in system
• 5 Year Warranty	Low cost of ownership

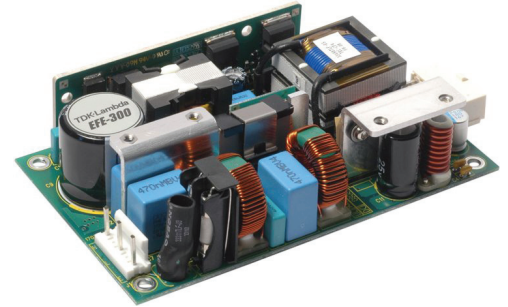

Input			
Input Voltage	90-264Vac	Input Frequency	45 - 63Hz (440Hz with reduced PFC - consult sales office)
Input Harmonics	EN61000-3-2 compliant	Inrush Current	<20A at 25°C and 230Vac (cold start) (meets EN61000-3-3). <30A for EFE400
Input Fuse	Dual fuses (Live + Neutral) Fast acting (not user accessible)		
Earth Leakage Current	410µA at 120Vac (60Hz), 858µA max at 240Vac (60Hz) Worst case leakage current is less than 1.0mA at 264Vac, 63Hz (normal condition, 1.8mA Single Fault Condition)		

Quick Selector (Standard models). Additional variants available - see below							
Output Voltage	Current	Units without fan				Units with end fan	
		Open Frame		Cover + Chassis		Cover + Chassis	
		Description	Order Code	Description	Order Code	Description	Order Code
12V	25A	EFE300-12-CNMD5	U2Y002G	EFE300-12-CCMDS	U2Y001F	EFE300-12-ECMDS	U2Y003H
	33.3A	EFE400-12-CNMD5	U4Y002H	EFE400-12-CCMDS	U4Y001G	EFE400-12-ECMDS	U4Y003J
24V	12.5A	EFE300-24-CNMD5	U2Y005K	EFE300-24-CCMDS	U2Y004J	EFE300-24-ECMDS	U2Y006L
	16.7A	EFE400-24-CNMD5	U4Y005L	EFE400-24-CCMDS	U4Y004K	EFE400-24-ECMDS	U4Y006M

How To Create A Product Description

Output	Factory Setting Range	
	EFE300	EFE400
12	11.4 - 13.2V	11.4 - 13.2V
24	22.8 - 26.4V	22.8 - 26.4V

Required output voltage must be specified at time of ordering

Case / Fan Option	
CN	Open frame, no fan, with 12V / 0.25A fan supply
CU	U chassis, no fan, with 12V / 0.25A fan supply
CC	Cover+chassis, no fan, with 12V / 0.25A fan supply
EC	Cover+chassis, end fan (temp controlled)

Product Description Format: **EFE300- or EFE400-** Vout - Case/Fan Option Input Connector **D** - Dual Fused Earth Leakage Output Connector

blank = right angled
-V = vertical

M = Molex (see connection drawings for details)
S = Standard (see above for details)

Confirm availability of created product with the sales office

Isolation				
Input to Output	Reinforced	3kVac, 4.3kVdc		
Input to Earth	Basic	1.5kVac, 2.3kVdc	Output to Earth	200Vdc

Output Specification			
	EFE300	EFE400	
Output Power	300W	400W	Continuous or RMS (including Peak power)
Peak Power	400W	530W	EFE300 - for 10 seconds EFE400 - for 10 seconds
Total Regulation	better than 4% Including Line (for 90-264Vac input change), Load (for 0-100% load change) and temperature (0-50°C)		
Ripple & Noise	1.5%	pk-pk, using EIAJ test method & 20MHz bandwidth	
Voltage Setting Accuracy	±1%	at 50% load	
Turn on Time	1.5s max	at 90 Vac & 100% rated output power. EFE400 2s max.	
Efficiency	up to 90%		
Hold up	>16ms	at 90 Vac, 75% load	
Min Load	None		
Transient Response	<5%	of set voltage for 50% load change (in 50µs within the range 25 - 100% load)	
Recovery	<1ms	for recovery to 2% of set voltage	
Short circuit protection	Yes	Auto recovery after removal of short circuit	
Over Temperature protection	Yes	Primary - auto recovers, secondary - cycle power to restart	
Over Voltage Protection	Yes	Latching, need to cycle ac to restart unit.	
Fan supply	12V / 0.25A	Available if 'no fan' is specified, otherwise used by PSU fan. No access to connector with -CC (cover + chassis) variant.	

Environment	
Temperature	0°C to 50°C operational, -40°C to 70°C storage (max 12 months). Full load, with 2m/s air blown from input to output (approximately 10CFM)
Derating	50°C to 70°C derate each output by 2.5% per °C
Low Temp Startup	-20°C
Humidity	5 - 95% RH non condensing
Shock	±3 x 30g shocks in each plane, total 18 shocks 30g shock = 11ms (+/-0.5msec), half sine Conforms to EN60068-2-27, EN60068-2-47, IEC68-2-27, IEC68-2-47, JIS C0041-1987. Conforms to MIL-STD-810E/F, Method 516.5, Pro IV, VI
Vibration	Single axis 10 - 500 Hz at 2g (sweep and endurance at resonance) in all 3 planes Conforms to EN60068-2-6, IEC68-2-6 Conforms to MIL-STD-810E, Method 514.4, Pro I, Cat 1,9
Altitude	-200 to 3000 metres operational (-200 to 5000m storage/transportation)
Pollution	Degree 2, Material group IIIb

Emissions EN61000-6-3:2007		
Radiated Electric Field	EN55011, EN55032	(as per CISPR.11/22) Class B, FCC47 part 15 subpart B see application note for details
Conducted Emissions	EN55011, EN55032	(as per CISPR.11/22) Class B, FCC47 part 15 subpart B
Conducted Harmonics	EN61000-3-2	Class A Class C - EFE300 at 100W and above, EFE400 at 200W and above
Flicker	EN61000-3-3	Compliant - d _{max} only

Immunity EN61000-6-2:2005				Criteria
Electrostatic Discharge	EN61000-4-2	Level 4	Air discharge 15kV, Contact discharge 8kV Not applicable to open frame units	A
Electromagnetic Field	EN61000-4-3	Level 3	12V/m	A
Fast / Burst Transient	EN61000-4-4	Level 4	ac input tested to 4.4kV dc output tested to 2.2kV	A
Surge Immunity	EN61000-4-5	Level 3	Common mode - 2.2kV Differential - 1.1kV	A
Conducted RF Immunity	EN61000-4-6	Level 3	12V	A
Power Frequency Magnetic Field	EN61000-4-8	Level 4	30A/m	A
Voltage Dips, Variations, Interruptions	EN61000-4-11	Class 3	Criteria B for dip to 40% for 5 cycles, 1 cycle interruption and 5 sec interruption	A
Ring Wave	EN61000-4-12	Level 3	Common mode - 2.2kV Differential - 1.1kV	A
Voltage Fluctuations	EN61000-4-14	Class 3		A

Safety Approvals		Notes
IEC/EN 60950-1, UL60950-1 / CSA 22.2 No 60950-1		File E135494
IEC/EN 61010-1		File E331788
CE Mark (EN60950-1)		LV Directive 2006/95/EC
CB certificate and Report available on request		<i>Please check with technical sales for status of approvals</i>

Outline & Connection Drawings

EFE300 (not -V version)

J1 PIN CONNECTION

1	EARTH
2	NOT CONNECTED
3	LIVE
4	NOT CONNECTED
5	NEUTRAL

J2 TOP ROW: -V PINS 6 - 10
J2 BOTTOM ROW: +V PINS 1 - 5
J2 FAN DRIVE (OPEN FRAME/TV CHANNEL ONLY)

J3 PIN CONNECTION

1	-V
2	+V
3	DO NOT CONNECT

MATING PARTS (MOLEX OR EQUIVALENT)

CONNECTOR	HOUSING	CRIMP PIN
J1	09-50-8051	08-52-0113
J2	39-01-2155	45750-3112
J3	02201-3037	08-50-0032

NOTE:
A 4 OFF HOLES Ø3.5mm CLEARANCE FOR M3 FIXINGS.
B 8 OFF FIXING HOLES FOR M3, MAXIMUM PENETRATION 4.5mm,
MAXIMUM TORQUE 0.9Nm.
ALL TOLERANCES +/-0.5mm.

EFE400 (not -V version)

J1 PIN CONNECTION

1	EARTH
2	NOT CONNECTED
3	LIVE
4	NOT CONNECTED
5	NEUTRAL

J2 TOP ROW: -V PINS 8 - 14
J2 BOTTOM ROW: +V PINS 1 - 7
J3

J3 PIN CONNECTION

1	-V
2	+V
3	DO NOT CONNECT

MATING PARTS (MOLEX OR EQUIVALENT)

CONNECTOR	HOUSING	CRIMP PIN
J1	09-50-8051	08-52-0113
J2	39-01-2145	45750-3112
J3	02201-3037	08-50-0032

NOTE:
A 4 OFF HOLES Ø3.5mm CLEARANCE FOR M3 FIXINGS.
B 8 OFF FIXING HOLES FOR M3, MAXIMUM PENETRATION 4.5mm,
MAXIMUM TORQUE 0.9Nm.
ALL TOLERANCES +/-0.5mm.

Note, connection details and outline drawings for -v (vertical) connector are different See handbook for details

- Notes
1. All customer fixings M3
 2. Maximum Penetration 4.5mm
 3. Maximum torque 0.9Nm
 4. All tolerances +/-0.5mm

Connectors are not included with the product. They are available from TDK-Lambda

- 1 off input connector and 3 crimps are available as part number is 94910.
1 off output connector and 10 crimps are available as part number 94750. (EFE300)
1 off output connector and 14 crimps are available as part number 94751 (EFE400)



TDK-Lambda France SAS

3 Avenue du Canada
Parc Technopolis
Bâtiment Sigma
91940 les Ulis
France
Tel: +33 1 60 12 71 65
Fax: +33 1 60 12 71 66
france@fr.tdk-lambda.com
www.fr.tdk-lambda.com



Italy Sales Office

Via Giacomo Matteotti 62
20092 Cinisello Balsamo (MI)
Italy
Tel: +39 02 61 29 38 63
Fax: +39 02 61 29 09 00
info.italia@it.tdk-lambda.com
www.it.tdk-lambda.com



Netherlands

info@nl.tdk-lambda.com
www.nl.tdk-lambda.com



TDK-Lambda Germany GmbH

Karl-Bold-Strasse 40
77855 Achern
Germany
Tel: +49 7841 666 0
Fax: +49 7841 5000
info.germany@de.tdk-lambda.com
www.de.tdk-lambda.com



Austria Sales Office

Aredstrasse 22
2544 Leobersdorf
Austria
Tel: +43 2256 655 84
Fax: +43 2256 645 12
info@at.tdk-lambda.com
www.de.tdk-lambda.com




Switzerland Sales Office

Eichtalstrasse 55
8634 Hombrechtikon
Switzerland
Tel: +41 44 850 53 53
Fax: +41 44 850 53 50
info@ch.tdk-lambda.com
www.de.tdk-lambda.com



Nordic Sales Office

Haderslevvej 36B
DK-6000 Kolding
Denmark
Tel: +45 8853 8086
info@dk.tdk-lambda.com



TDK-Lambda UK Ltd.

Kingsley Avenue
Ilfracombe
Devon EX34 8ES
United Kingdom
Tel: +44 (0) 12 71 85 66 66
Fax: +44 (0) 12 71 86 48 94
powersolutions@uk.tdk-lambda.com
www.uk.tdk-lambda.com



TDK-Lambda Ltd.

1 Alexander Yanai
Segula
Petah-Tikva
Israel
Tel: +9 723 902 4333
Fax: +9 723 902 4777
info@tdk-lambda.co.il
www.tdk-lambda.co.il



C.I.S.

Commercial Support:

Tel: +7 (495) 665 2627

Technical Support:

Tel: +7 (812) 658 0463

info@tdk-lambda.ru

www.tdk-lambda.ru

Local Distribution

