


**2-5435668 -7 Product Details**

**Live Product Chat** US Only  
8:30am - 5pm ET, Mon - Fri

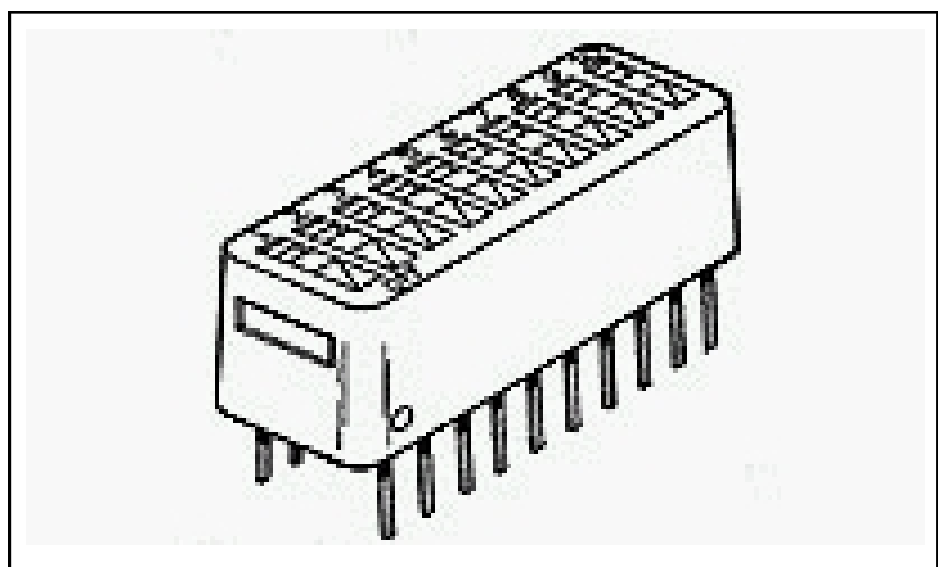

**2-5435668 -7**

✓ [Active](#)

**DIP, Rotary DIP, SIP Switches and DIP Shunts - Standard**

[Always EU RoHS/ELV Compliant](#) ( [Statement of Compliance](#) )

**Product Highlights:**

- ? DIP Switch
- ? PCB Mount Style = Thru Hole
- ? Single Pole - Single Throw Configuration (Pole - Throw)
- ? Actuator Style = Rocker (Top Actuated)
- ? Sealed

[View all Features](#) | [Find Similar Products](#)

**Quick Links**

- [Check Pricing & Availability](#)
- [Search for Tooling Product Feature Selector](#)
- [Contact Us About This Product](#)

**Documentation & Additional Information**

**Product Drawings:**

- ? [SWITCH ASSY, DIP, TYPE C, 7100 SERIES, SPST, LOW PROFILE](#) (PDF, English)

**Catalog Pages/Data Sheets:**

- ? None Available

**Product Specifications:**

- ? None Available

**Application Specifications:**

- ? [Dual In -Line Package \(DIP\) Programming Switches \(700...](#) (PDF, English)

**Instruction Sheets:**

- ? [Dual In -Line Package \(DIP\) Programming Switches \(700...](#) (PDF, English)

**CAD Files:**

- ? None Available

**Additional Information:**

- ? [Product Line Information](#)

**Additional Product Images:**

- ? [Contact Arrangement](#)
- ? [Recommended PC Board Hole Pattern](#)

**Related Products:**

- ? [Tooling](#)

[List all Documents](#)

**Product Features**

(Please use the Product Drawing for all design activity)

**Product Type Features:**

- ? Product Type = DIP Switch
- ? PCB Mount Style = Thru Hole
- ? [Configuration \(Pole - Throw\)](#) = Single Pole - Single Throw
- ? [Actuator Style](#) = Rocker (Top Actuated)
- ? Sealed = Yes
- ? [Number of Switches](#) = 7

**Termination Related Features:**

- ? Seal Type = Tape
- ? Termination (Solder) Post Length (mm [in]) = 3.56 [0.140]

**Body Related Features:**

- ? Series = 7100
- ? Centerline (mm [in]) = 2.54 [0.100]

**Contact Related Features:**

- ? Auto -Insertable = No
- ? Contact Material = Copper Alloy
- ? Contact Mating Area Plating = Gold (30) over Nickel (50)

**Housing Related Features:**

- ? Low Profile = Yes
- ? Housing Color = Blue
- ? Housing Material = Polyester GF
- ? Housing Flammability Rating = UL 94V -0

**Industry Standards:**

- ? [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- ? [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- ? RoHS/ELV Compliance History = Always was RoHS compliant

**Packaging Related Features:**

- ? Packaging Quantity = 16

**Other:**

- ? Brand = Alcoswitch