


**COIL:**

RESISTANCE 390 OHMS ± 10%  
 NOMINAL VOLTAGE 26.5 VDC  
 MUST OPERATE 15.5 VDC @ 25°C  
 MUST RELEASE 1.8 VDC @ 25°C

**CUSTOMER DATA SHEET**

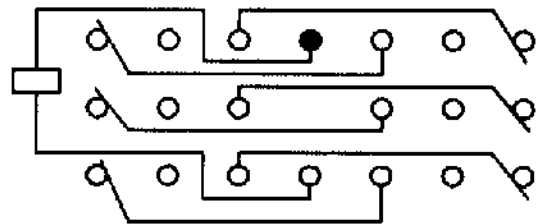

**ENVIRONMENT:**

VIBRATION 10 CPS TO 2000 CPS @ 20 g's  
 SHOCK 100 g's 6 MS. DURATION  
 TEMPERATURE -65 °C TO +125 °C

CONTACT RATING: LOW LEVEL TO  
2 AMP / 28 VDC

NOTES: TERMINALS ARE GOLD-PLATED I.A.W.  
MIL-G-45204, TYPE II, CLASS I.  
OPERATE & RELEASE TIME 5 MS MAX.  
CONTACT BOUNCE 5 MS MAX.

DR. R.B. 11/4/91 | CK. JAW/ 11-4-91



CUST. CIIS10  
 CUST. NO. \_\_\_\_\_

TYPE 'SS' RELAY

**SSBW-6C-24G**