


REV. 2

DCO 141326

OPERATOR DATA SHEET

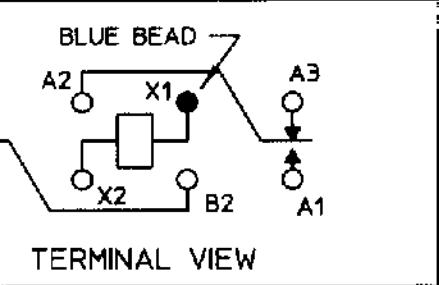

RATING: LOW LEVEL TO
AMPS 28 VDC RESISTIVE
50,000 OPERATIONS

11/21/96 CK. Gg # 9/20/99

COMMUNICATIONS
INSTRUMENTS, INC.

3SBC1503A2

COIL: @ 25°C	
RESISTANCE	1350 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.5 VDC
MUST RELEASE	8.1 VDC MAX, 1.5 VDC MIN.

ENVIRONMENT:	
VIBRATION	10 CPS TO 3000 CPS @ 30 g's
SHOCK	75 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES: OPERATE & RELEASE 4 MS. MAX.
 BOUNCE 2 MS. MAX.

CUST. OPL
 CUST. NO. M39016/13-057L REV.

3SBC RELAY

CUSTOMER

B1
 B2
 B3

CONTACT 2 A

DR. R.B.

3S