


COIL: @ 25°C  
 RESISTANCE \_\_\_\_\_ 2500 OHMS ± 10%  
 NOMINAL VOLTAGE \_\_\_\_\_ 20.0 VDC  
 MUST OPERATE \_\_\_\_\_ 4.0 mA  
 MUST RELEASE \_\_\_\_\_

ENVIRONMENT:  
 VIBRATION 10 CPS TO 2000 CPS @ 15 g's  
 SHOCK 50 g's 11 MS. DURATION  
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 15 MS MAX.  
 RELEASE TIME 10 MS MAX.  
 CONTACT BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

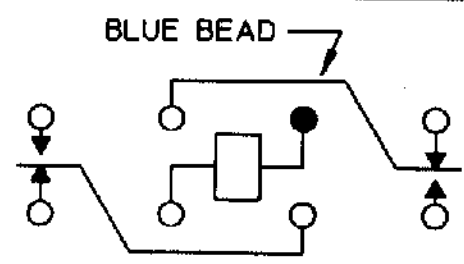

CONTACT RATING: 2A 28 VDC  
 RESISTIVE 100,000 OPERATIONS

DR. R.B. 3/9/93 CK. 3/2/03



CUST. C. I. I. STD.  
 CUST. NO. \_\_\_\_\_

TYPE 'SF' RELAY

SF5201J00