


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	D1	REDRAWN/REV PER ECO-17-008809	20JUN2017	RS	DR

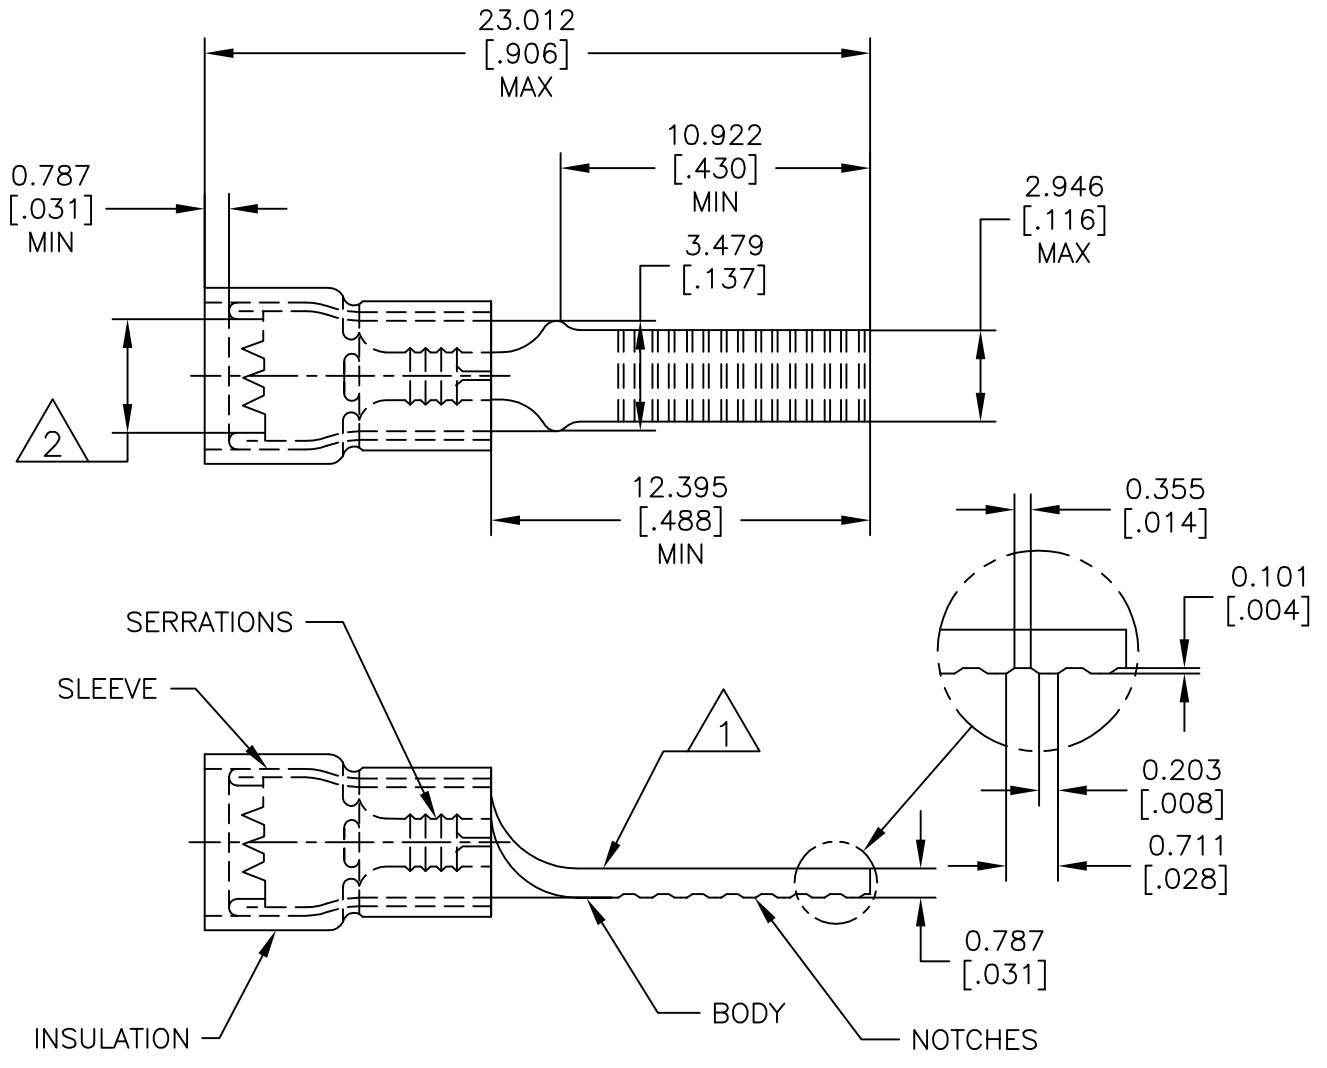

- 1 STAMP AMP 22-16 APPROX AS SHOWN.
- 2 WIRE INSULATION $\phi 2.692-3.581[\phi .106-.141]$
- 3 BODY MATERIAL THICKNESS $0.787 \pm 0.050[.031 \pm .002]$
- 4 MATERIAL : COPPER PER ASTM B152.
- 5 FINISH : TIN PLATED PER ASTM B545 MIN EXT.THK. $0.00254[.000100]$.

1000	LOOSE PIECE	131331
QTY	PACKAGE TYPE	PART NO

THIS DRAWING IS UNPUBLISHED. ALL RIGHTS RESERVED. © COPYRIGHT - TE Connectivity

DIMENSIONS: mm [INCHES]	DWN RAVI S 20JUN2017	MATERIAL 4	FINISH 5				
	CHK ROHDE DANIEL 20JUN2017	TE Connectivity					
TOLERANCES UNLESS OTHERWISE SPECIFIED: REMOVE BURRS, BREAK SHARP EDGES $\frac{1}{4}$ R MAX	APVD ROHDE DANIEL 20JUN2017			NAME WIRE TAB PIDG 22-16 AWG			
	0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.127[.005] 4 PLC ± - ANGLES ± 5°	PRODUCT SPEC -	SIZE A4	CAGE CODE 00779	DRAWING NO 131331	RESTRICTED TO -	
	APPLICATION SPEC 114-2157	WEIGHT -	CUSTOMER DRAWING		SCALE 6:1	SHEET 1 OF 1	REV D1