

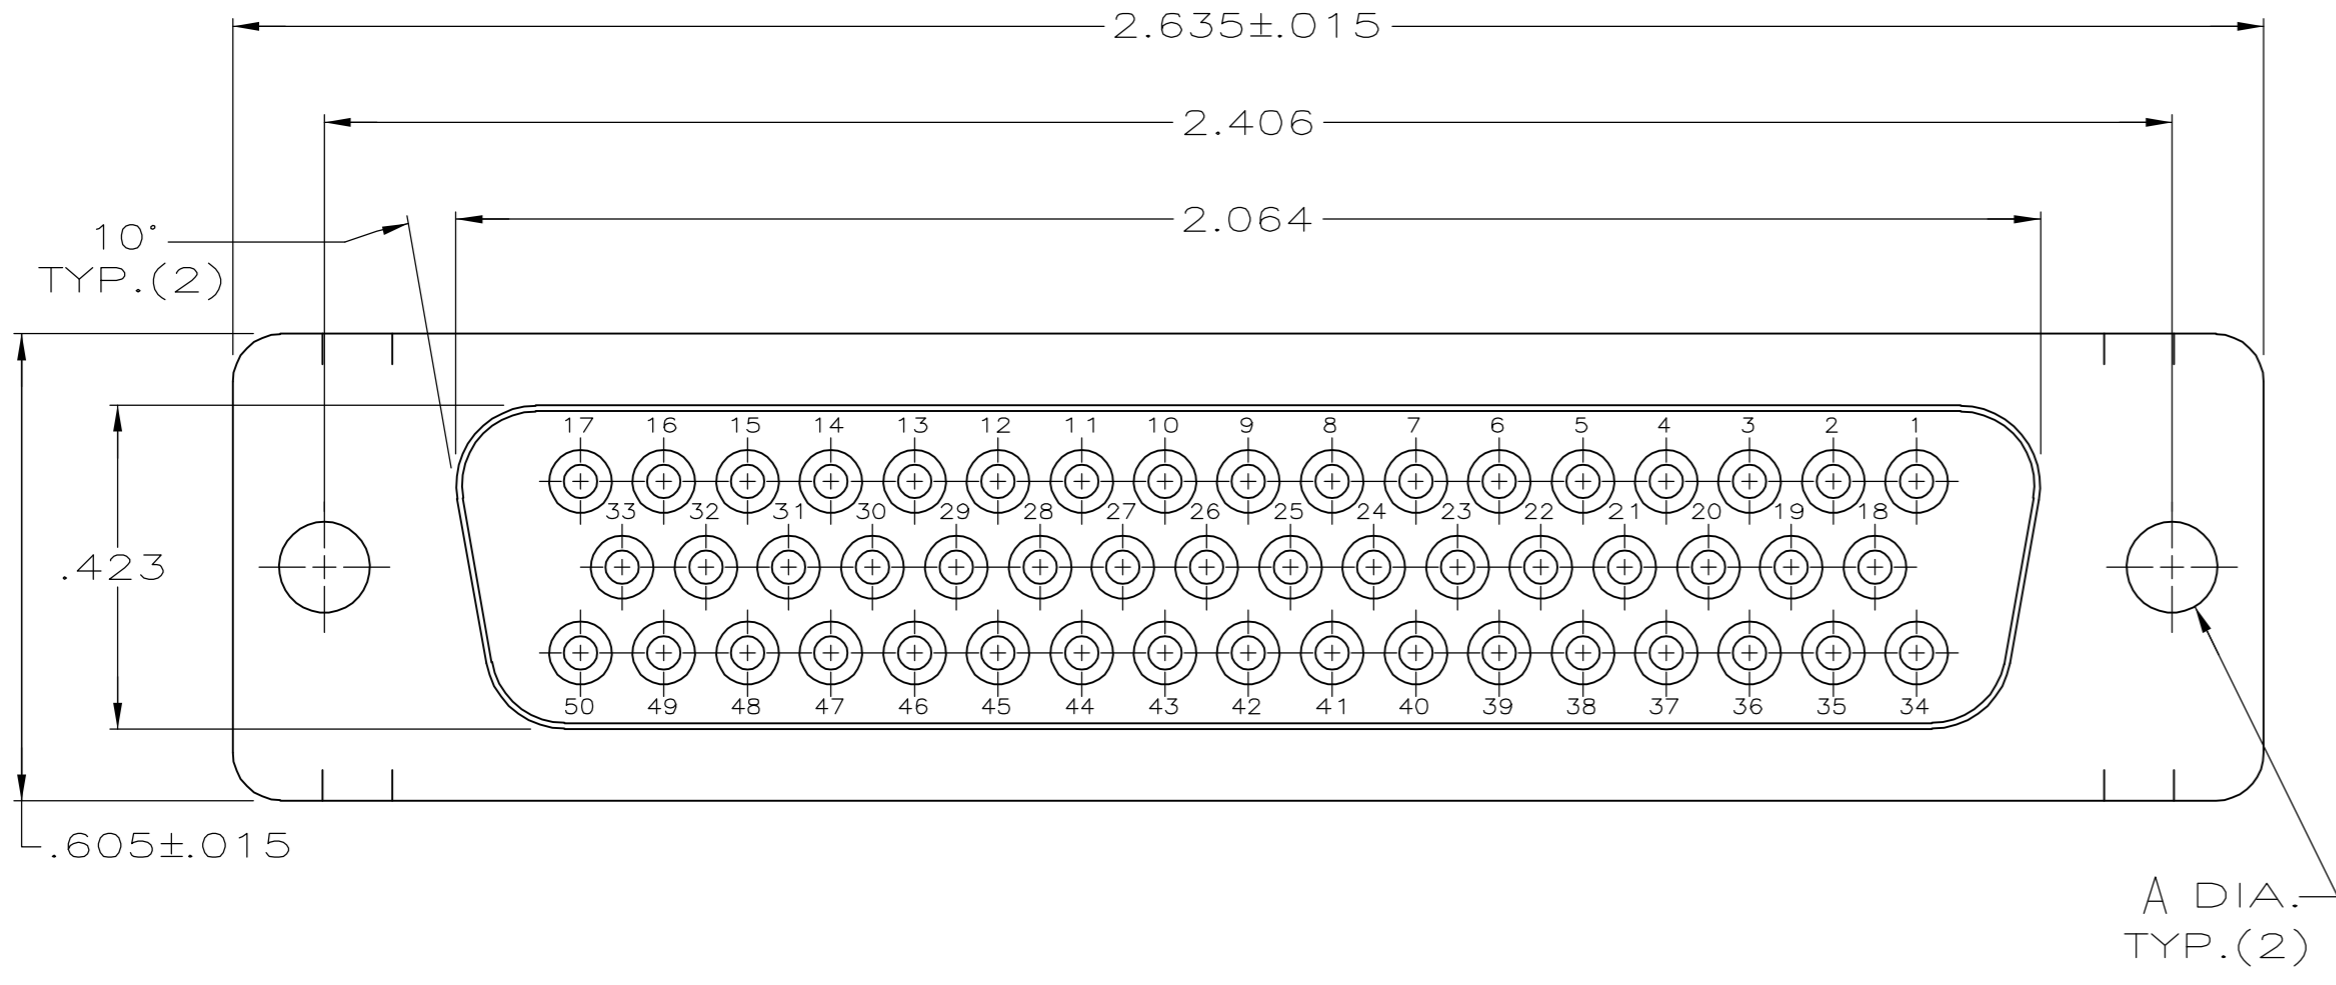


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00	H1	REVISED PER ECO-06-020813	6/NOV/06	ZR CR

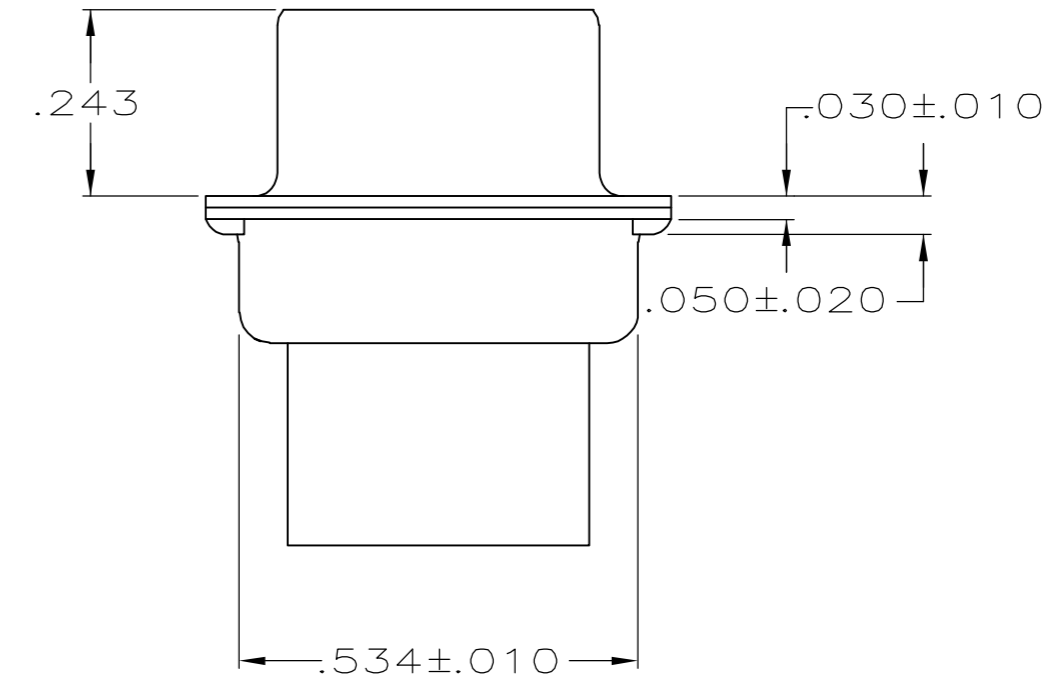

- 1. CONNECTOR ACCEPTS SIZE 20 DF SOCKET CONTACTS, RETENTION TINES ARE AN INTEGRAL PART OF INSERT.
- 2. CONNECTOR COMPLIES WITH AMP SPEC. 108-40,005 WHERE APPLICABLE.
- ③ FLAME RETARDANT 94V-0 RATED GLASS FILLED NYLON, COLOR: BLACK.
- ④ STEEL PER ASTM A109.
- ⑤ ZINC PLATED PER ASTM B633; TYPE II; CLASS SC1; YELLOW CHROMATE.
- ⑥ TIN PLATED PER MIL-T-10727.

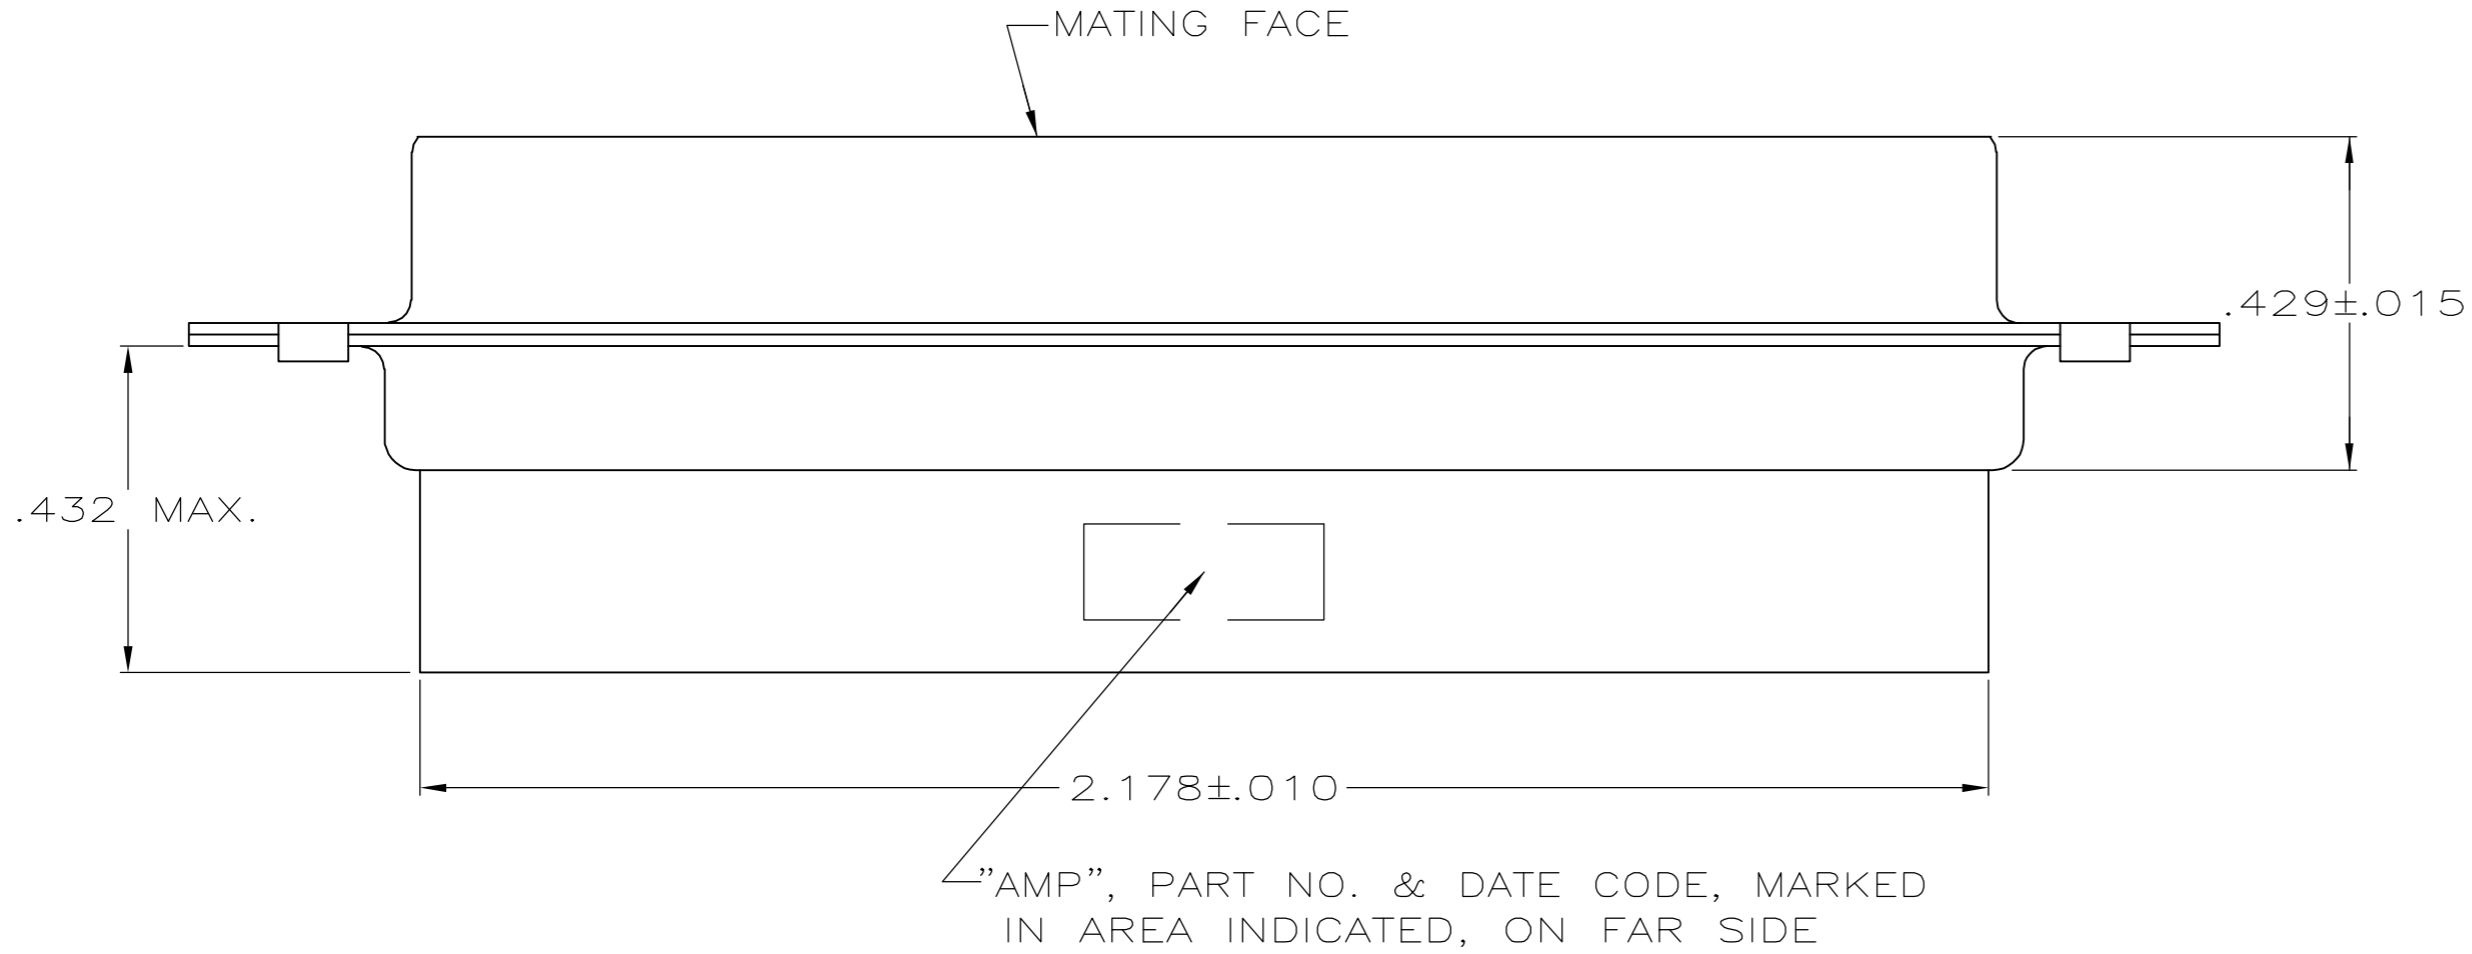

SUPERSEDED BY 205211-1	SMALL PACK	⑤	.120	205211-5
OBSOLETE	STANDARD	⑥	.154	205211-4
OBSOLETE	STANDARD	⑥	.120	205211-2
OBSOLETE	STANDARD	⑤	.120	205211-1

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		MATERIAL		FINISH		MOLDED PARTS:		SHELLS:	
INCHES		0 PLC	± -	1 PLC	± -	③	FLAME RETARDANT 94V-0 RATED GLASS FILLED NYLON	④	STEEL PER ASTM A109	⑤	ZINC PLATED PER ASTM B633; TYPE II; CLASS SC1; YELLOW CHROMATE
		2 PLC	± -	⑥	TIN PLATED PER MIL-T-10727						
		3 PLC	± .005								
		4 PLC	± -								
		ANGLES	± 2°								

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	S.WELDON	7-19-85	Tyco Electronics Corporation Harrisburg, PA 17105-3608		
		CHK	J.GERACE	7-29-85			
		APVD	V.KUMAR	7-31-85			
		PRODUCT SPEC					
		APPLICATION SPEC			NAME	RECEPTACLE CONNECTOR, SIZE 5, 50 POS., AMPLIMITE™ HDP	
		WEIGHT	-		SIZE	A2	
		CUSTOMER DRAWING			CAGE CODE	00779	
		SCALE	4:1		DRAWING NO	C=205211	
		SHEET	1 of 1		RESTRICTED TO		
		REV	H1				