

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
 © COPYRIGHT 20 ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
C		REVISED PER ECO-16-010988	22JUL2016	JPS	JLM
D		REVISED PER ECO-17-013859	20SEP2017	CR	JLM
E		CORRECT NAME TO WIMAX	14APR2020	DC	AC


NOTES: UNLESS OTHERWISE SPECIFIED.

- SILKSCREEN TE LOGO, TE PN, REVISION LETTER ON TOP LAYER. FOLLOWED BY 4 DIGIT DATE CODE.
- MATERIAL: FR4, COPPER THICKNESS 1 OZ, TOTAL THICKNESS 0.304 WITH OUT ADHESIVE.
- FINISH: ENIG-ELECTROLESS NICKEL IMMERSION GOLD ON EXPOSED SOLDER AREAS PRIOR TO SOLDERING.
- PRODUCT AND PROCESSING MEETS REQUIREMENTS OF TE CONNECTIVITY ENVIROMENTAL SPECIFICATION TEC-138-702.

5. ADHESIVE; REMOVE PAPER BACKING OF PRESSURE SENSITIVE ADHESIVE TO APPLY.

6. REFERENCE TE DATASHEET DS2118059-1 FOR ANTENNA SPECIFICS.

SOLDER LOCATIONS

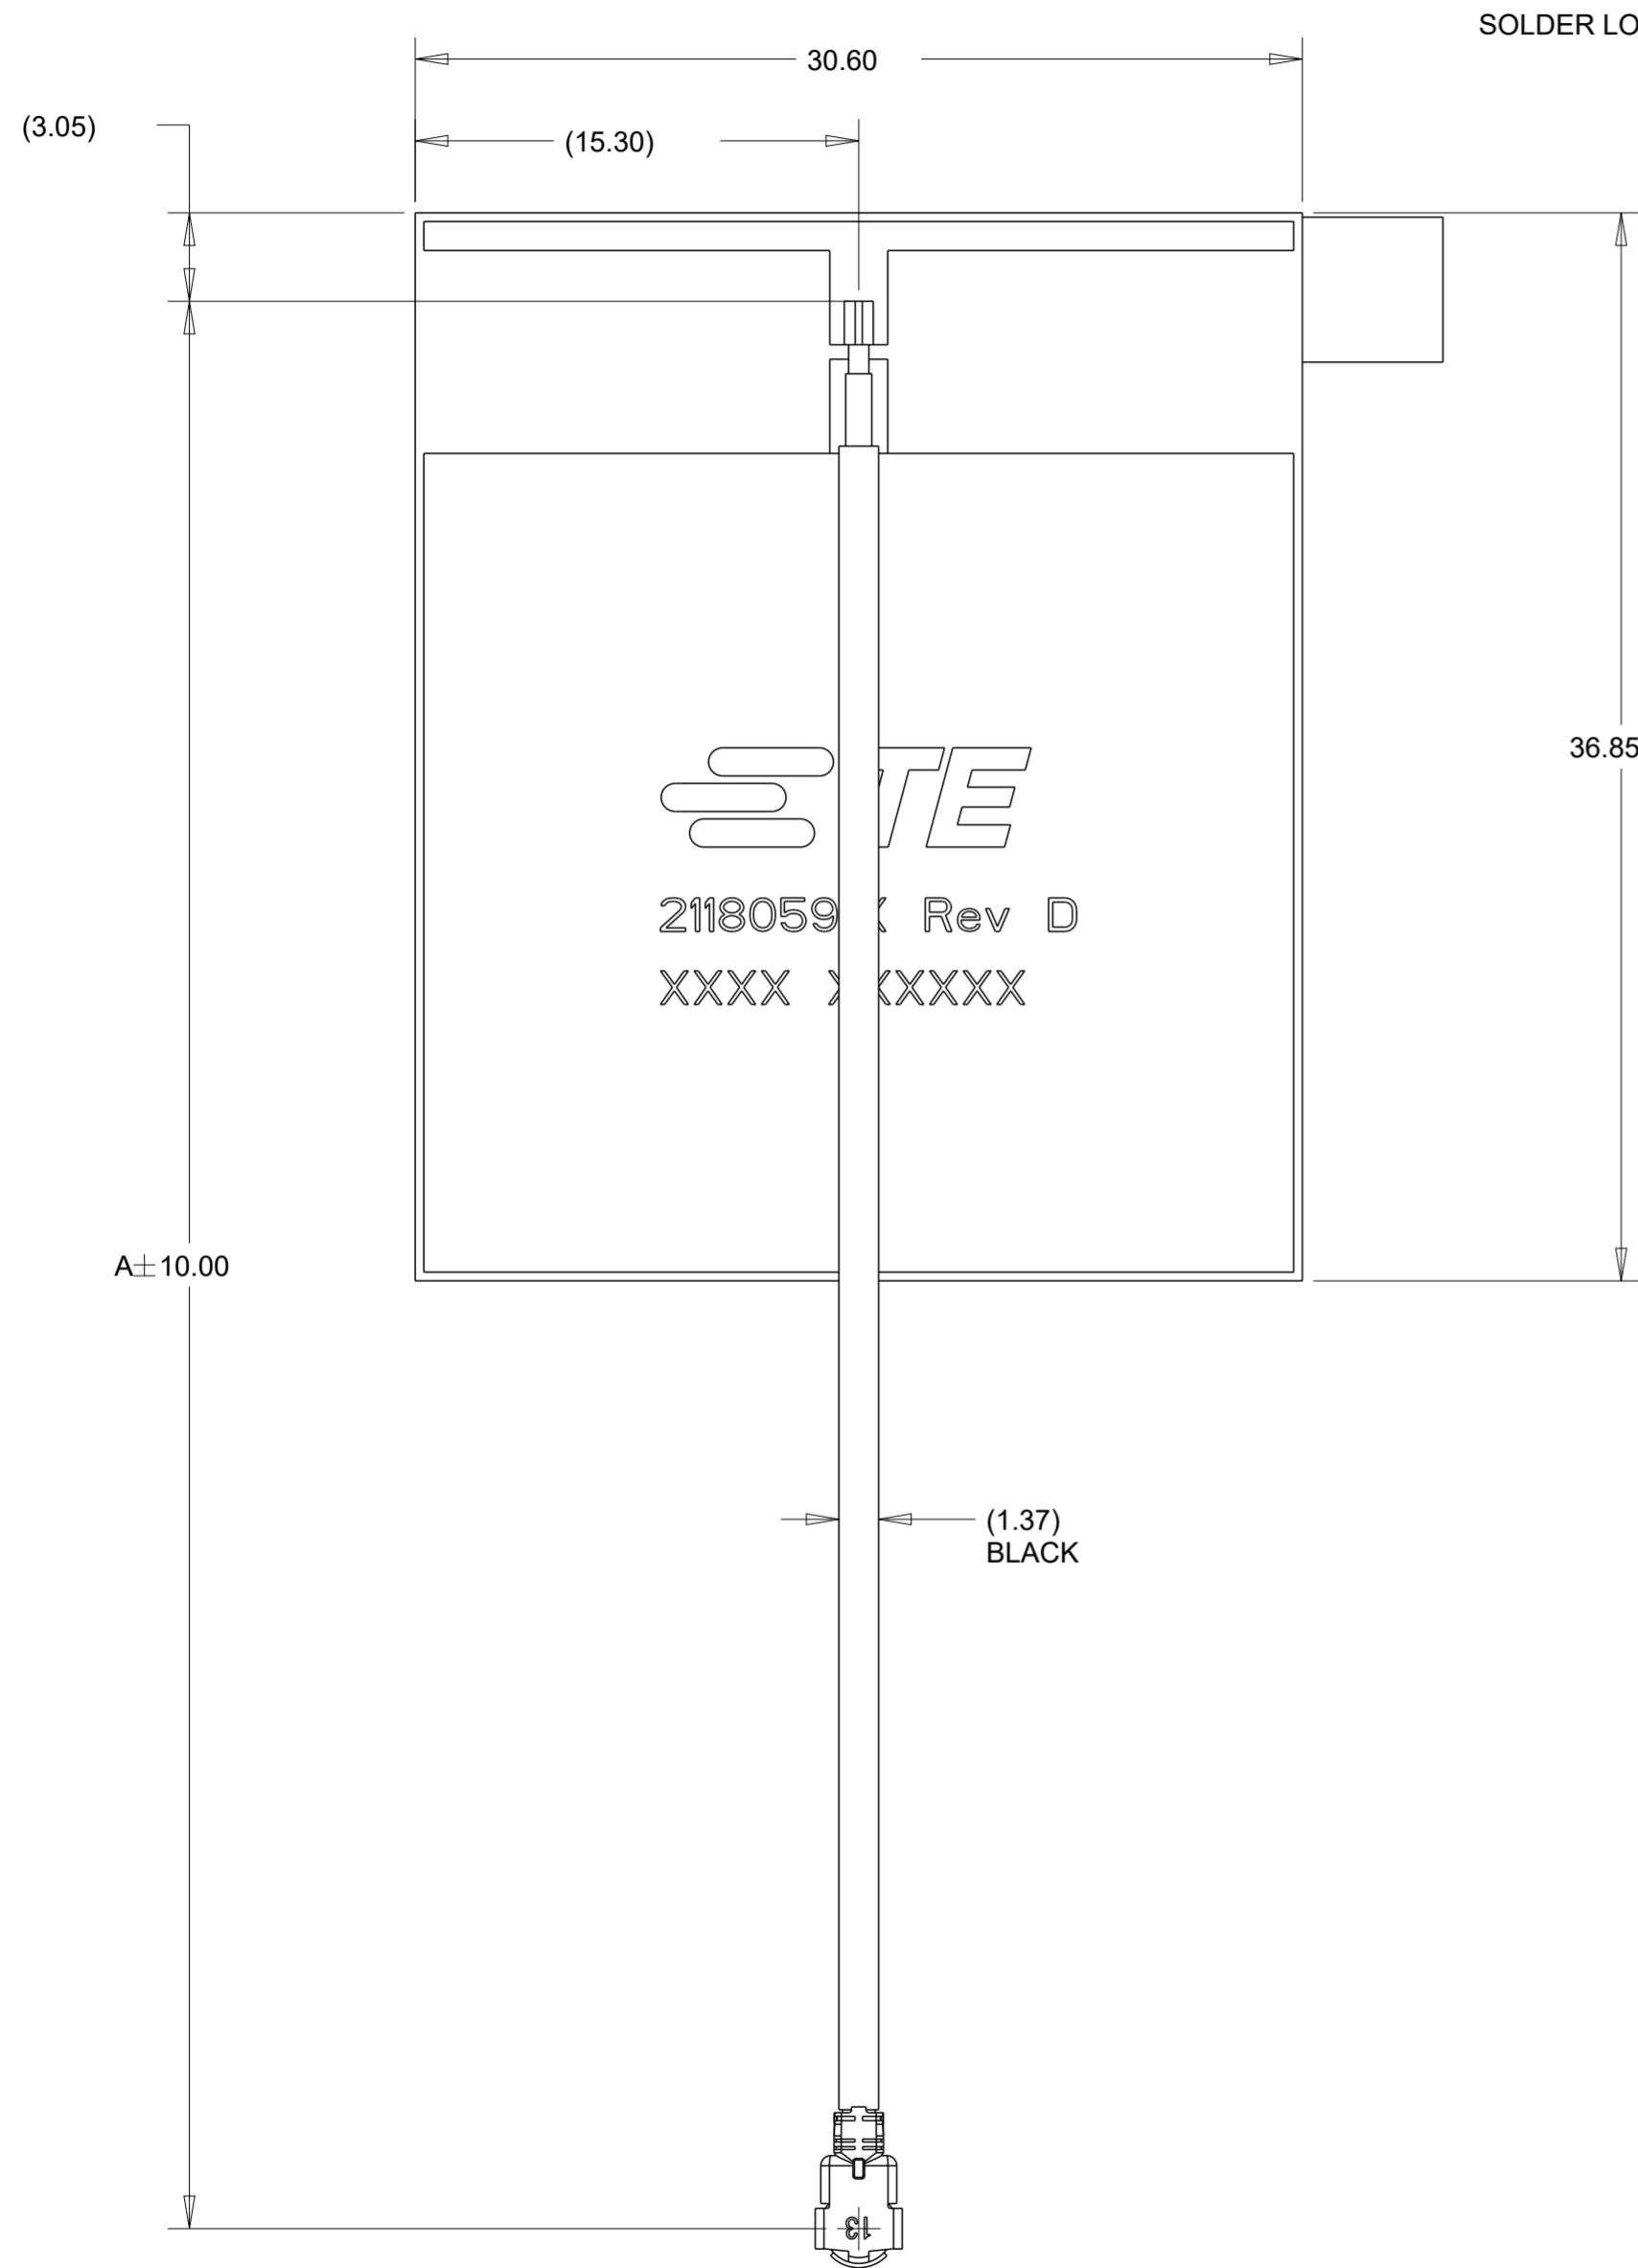

5 ENTIRE BACK SURFACE

150.00	2118059-3
NON-SALABLE	2118059-2
350.00	2118059-1
A	PN

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. SCHOLZ 22JUL2016	TE Connectivity		
DIMENSIONS:		CHK J. SCHOLZ 22JUL2016			
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD J. MOORE 22JUL2016	NAME WIMAX SINGLE BAND, U.FL CABLE 2300 Mhz-3800<Mhz		
0 PLC ±	1 PLC ±	PRODUCT SPEC	SIZE	CAGE CODE	DRAWING NO
2 PLC ±0.2	3 PLC ±	APPLICATION SPEC	A2	-	C-2118059
4 PLC ±	ANGLES ±	WEIGHT	SCALE	SHEET	REV
MATERIAL	FINISH	CUSTOMER DRAWING	4:1	1 OF 1	E