

1559-1606 MHz GNSS BAND ACTIVE ANTENNA, CABLE TYPE

Standard Antenna Solutions

Part Number: 2195763-1

PRODUCT FACTS:

- Active Ceramic Patch
- Embedded Antenna
- Customizable cable and connector
- RoHS compliant


RECOMMENDATIONS:

- Minimum or no matching circuits required
- LNA GND plane size 35.5mm x 35.5mm and radome



SPECIFICATIONS:

- Frequency Range: 1559-1606 MHz (when covered with a radome on LNA ground plane)
- Bandwidth: 10 MHz min
- Gain at Zenith: 26 dB typ (for ground 35.5mm x 35.5mm)
- VSWR: <3.0:1
- Polarization: R.H.C.P
- Feed Point Impedance: 50 ohms
- Operation Voltage: 3.0-3.3 ± 0.1V
- Current (DC=3.0± 0.1V): 4.5mA ± 2mA
- Size: 35.5mm x 35.5mm x 9mm
- Weight: 20.3 g
- Keep Out Area: See diagram on page 2
- Cable: 1.13mm dia., Length 70mm
- Connector: MHF plug
- Operating Temperature: -40° to 85°C

VSWR:

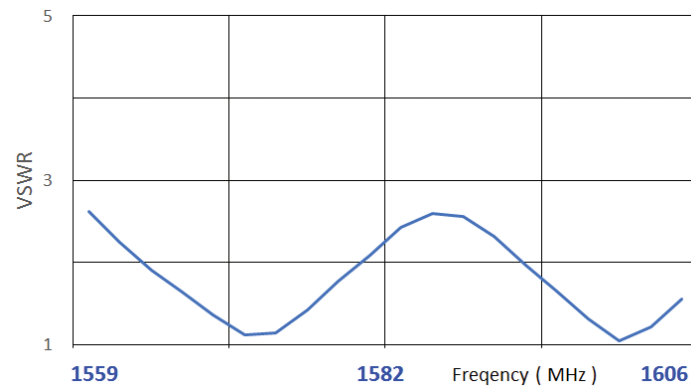

KEEP OUT AREA:

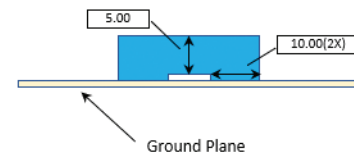

- NOTES :
1. Antenna designed to be mounted on ground plane.
 2. Area in blue above indicates Keep Out Area.
 3. For more information please call TE.

Dimensions : mm
Diagram is not to scale

