



# L37-3F Thermal Conductive Pad

Version 3.180220

## Thermal Conductive Pad

L37-3F is an ultra thin silicone based thermal interface pad which offers a good combination of high dielectric breakdown voltage, compliance and low thermal impedance. It contains a fibreglass mesh for enhanced ease of manufacture and is available in various formats such as standard sheets, log-rolls and custom die cut parts. L37-3F is available in a range of thicknesses.

## Features

Made of silicone, thermal conductive particles, fibreglass  
 Low elongation  
 Electrical insulation  
 Easy to assemble

## Applications



Electronic components: IC, CPU, MOS  
 LED, M/B, P/S, Heat Sink  
 LCD TV, Notebook PC, PC Telecom Device, Wireless Hub, etc.  
 DDR II Module, DVD Applications, Hand-set applications, etc.

## Properties

- ✓ REACH Compliant
- ✓ ROHS Compliant

Property	L37-3F			Unit	Tolerance	Test Method
Colour	Yellow			-	-	Visual
Thickness (Available thickness range)	0.25	0.3	0.45	mm	-	ASTM D374
	0.0098	0.0118	0.0177	inch	-	ASTM D374
Thermal Conductivity	1.4			W/mK	±0.14	ASTM D5470
Flammability Rating	V-0			-	-	UL 94
Dielectric Breakdown Voltage	3.1	4.1	5.1	kV	±0.4	ASTM D149
Weight Loss	<1			%	-	ASTM E595
Density	2			g/cm <sup>3</sup>	±0.2	ASTM D792
Working Temperature	-40 to 200			°C	-	-
Volume Resistance	>10 <sup>13</sup>			Ohm-cm	-	ASTM D257
Elongation	5			%	±13	ASTM D412
Tensile Strength	150			Kgf/cm <sup>2</sup>	±2	ASTM D412
Hardness	90			Shore A	±3	ASTM D2240

## Thermal Impedance vs Pressure vs Deflection

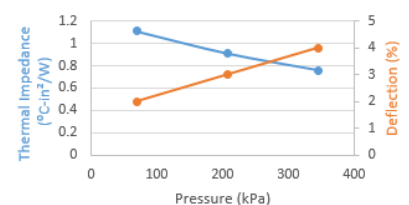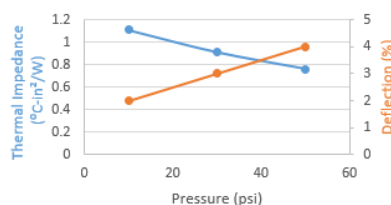

T-Global Technology Limited  
 1 & 2 Cosford Business Park, Central Park,  
 Lutterworth, Leicestershire LE17 4QU U.K.

Tel: +44 (0)1455 553 510  
 Email: sales@tglobaltechnology.com  
 Web: www.tglobaltechnology.com  
 VAT #: GB 116 662 714



# L37-3F Thermal Conductive Pad

## Standard Weights & Dimensional Tolerance


Size	Thickness (mm)	0.25	0.30	0.45
	100x100		5.00	6.00
150x150		11.25	13.50	20.25
300x300		45.00	54.00	81.00
320x320		51.20	61.44	92.16

\* All measurements in weights are in gr


\*\* All sizes are in mm

## Data

Thermal Conductivity ( W / mK)

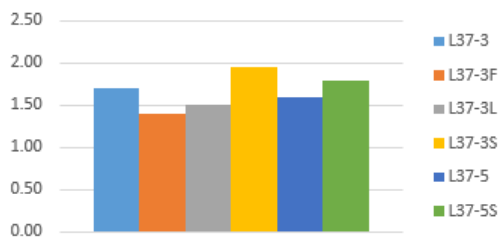

Hardness (Shore 00)

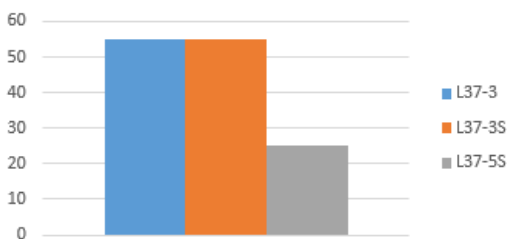

Die-Cut Thickness Tolerances	Thickness (mm)	Tolerance (mm)
	0.3	±0.03
	0.5	±0.05
	0.8	±0.08
	1.0	±0.1
	1.2	±0.12
	1.5	±0.15
	2.0	±0.2
	2.5 - 3.5	±0.25
	4.0 - 4.5	±0.3
	5.0	±0.35
	6.0 - 8.0	±0.4
9.0	±0.45	
10.0	±0.5	
>10.0	±0.5	

\* Data for design engineer guidance only. Observed performance varies in application. Engineers are reminded to test the material in application.

NOTICE: The information contained herein is to the best of our knowledge true and accurate. However, since the varied conditions of potential use are beyond our control, all recommendations or suggestions are presented without guarantee or responsibility on our part and users should make their own test to determine the suitability of our products in any specific situation. This product is sold without warranty either expressed or implied, of fitness for a particular purpose or otherwise, except that this product shall be of standard quality, and except to the extent otherwise stated in T-Global Technology Europe and North America's invoice, quotation, or order acknowledgment. We disclaim any and all liabilities incurred in connection with the use of information contained herein, or otherwise. All risks of such are assumed by the user. Furthermore, nothing contained herein shall be construed as a recommendation to use any process or to manufacture or to use any product in conflict with existing or future patents covering any product or material or its use.