
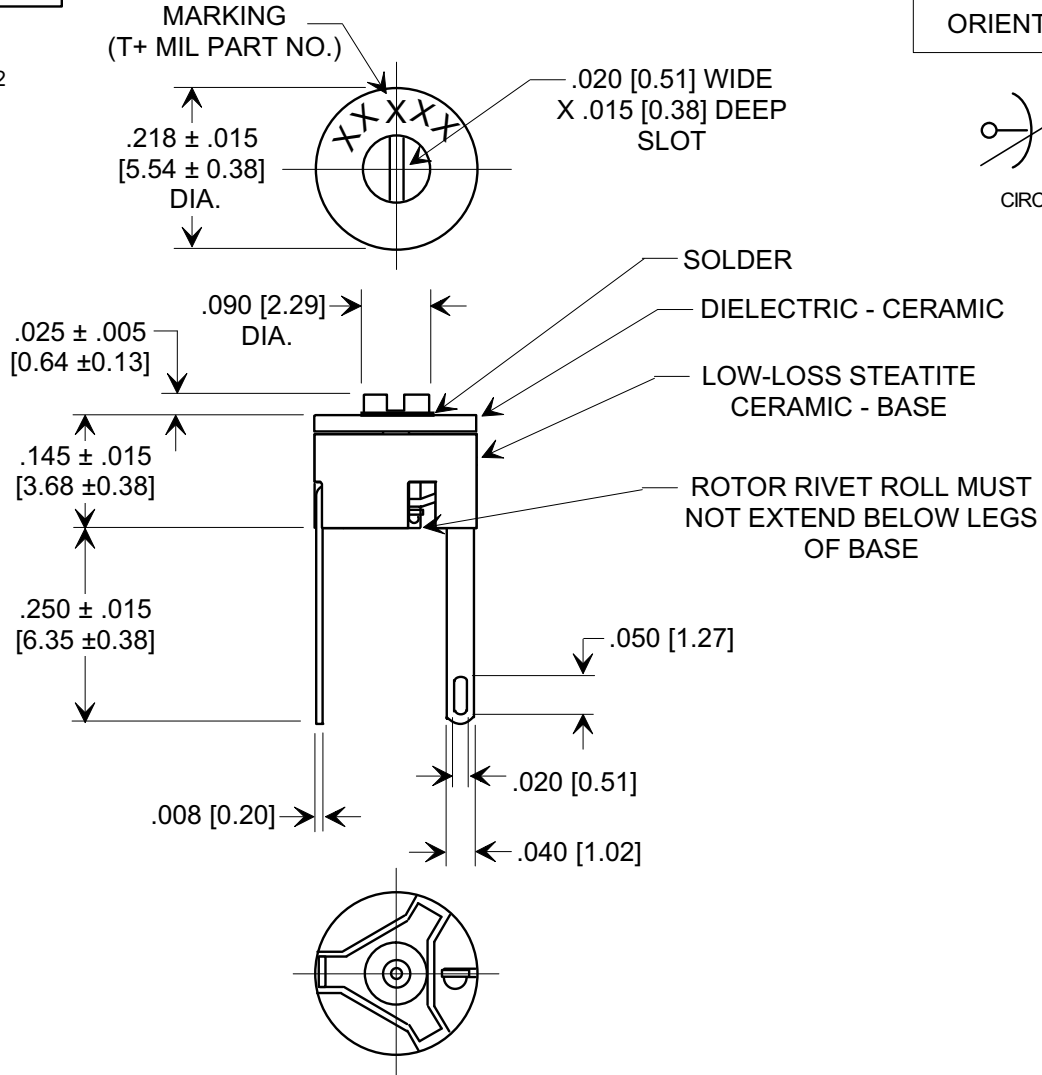



This drawing is the property of Tusonix, Inc., and may not be used, reproduced, published or disclosed to others without expressed authorization by Tusonix Inc.


MARKETING SALES DRAWING
DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []

Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.



SPECIFICATIONS

| | |
|--------------------------------|--------------------------|
| TUSONIX STYLE | 518-016 |
| Capacitance Range: | 5.0 - 25 pF |
| Capacitance Tolerance: | MIN: +0% , MAX: -0, +50% |
| Temperature Characteristic: | DIELECTRIC CODE A |
| Rating: | 100 VDC @ 85°C |
| Operating Temperature Range: | -55°C TO + 125°C |
| To MIL - C - 81/6E CV35A250 | |

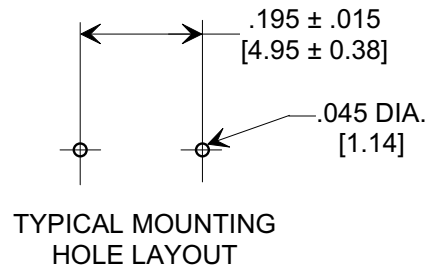

X-2015 Rev-0

| | | | | | |
|---|----------|--|-----------------------------------|----------|---|
| REVISION RECORD Original Release C.O. ECO-671 | A | TOLERANCES unless otherwise specified 2 PLC. DECIMAL ± $\frac{\quad}{\quad}$ 3 PLC. DECIMAL ± .005 [0.13] | Title | | MINIATURE CERAMIC TRIMMER |
| | | | ANGLES ± $\frac{\quad}{\quad}$ | Drawn | |
| | | | TUSONIX TUCSON, ARIZONA | Approved | R.L. 04-16-09 |
| | | | | A | 518-016 A 5.0-25 |