

3.2 x 1.6 x 0.5 (mm) GNSS Ceramic Chip Antenna (AA088H)

Engineering Specification

1. Product Number

H 2 U J 4 W 1 H 1 A 0 1 0 0



2. Features

- *Stable and reliable in performances
- *Low profile, compact size
- *RoHS2.0 compliance
- *SMT processes compatible

3. Applications

- *GNSS (Global Navigation Satellite System)
- *Hand-held devices when GPS& BDS & GLONASS & Galileo functions are needed, e.g., PDA, Smart phone, PND.

4. Description

Unictron's AA088H ceramic chip antenna is designed for GNSS band applications, covering frequencies 1560~1606 MHz. Fabricated with proprietary design and processes, AA088H shows excellent performance and is fully compatible with SMT processes which can decrease the assembly cost and improve device's quality and consistency.



詠業科技股份有限公司
Unictron Technologies Corporation
Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : **Wen**

Designed by : **George**

Checked by : **Mike**

Approved by : **Herbert**

TITLE : 3.2 x 1.6 x 0.5 (mm) GNSS Ceramic Chip Antenna (AA088H) Engineering Specification

DOCUMENT NO.

H2UJ4W1H1A0100


REV. Pre

5. Layout Guide & Electrical Specifications

5-1. Layout Guide (unit : mm)


Solder Land Pattern:

The solder land pattern (gold marking areas) is shown below. Recommendation on matching circuit will be provided according to customer's installation conditions.

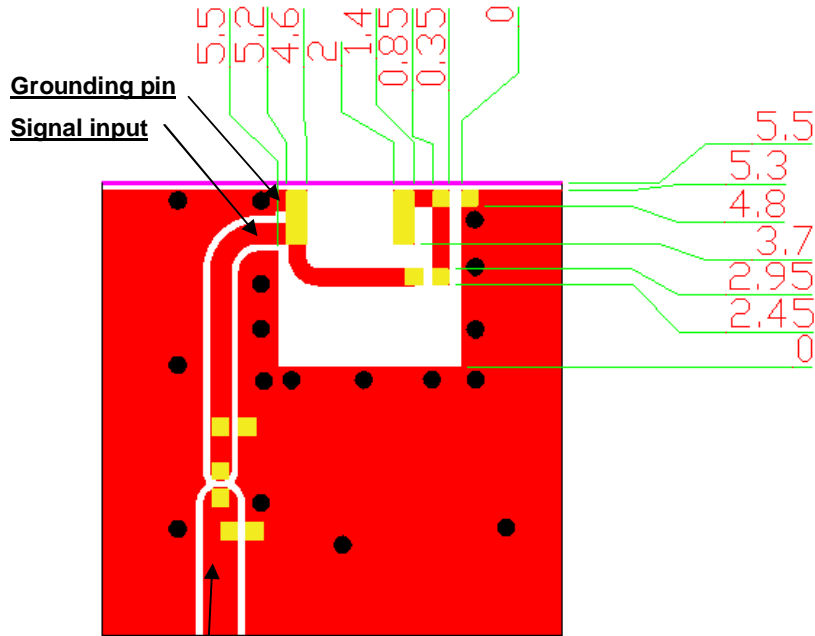

Transmission Line with 50Ω Impedance Characteristic

Top View

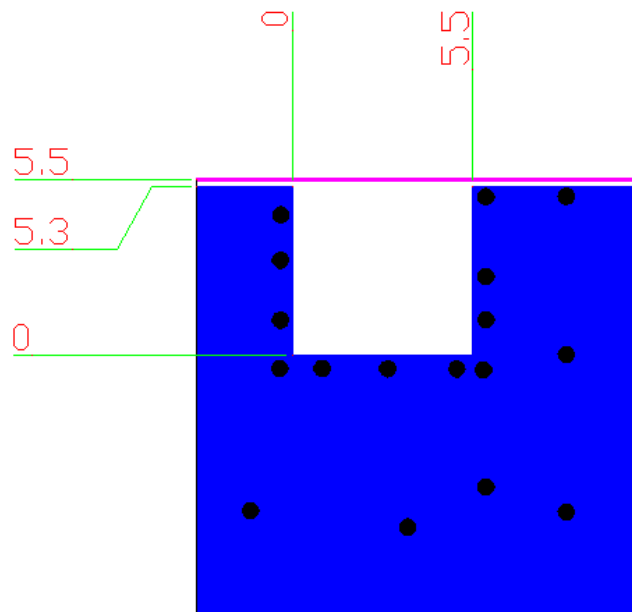

Bottom View



詠業科技股份有限公司
Unictron Technologies Corporation
Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Wen

Designed by : George

Checked by : Mike

Approved by : Herbert

TITLE : 3.2 x 1.6 x 0.5 (mm) GNSS Ceramic Chip Antenna (AA088H) Engineering Specification

DOCUMENT NO.

H2UJ4W1H1A0100

REV.

Pre

5-2. Electrical Specifications (Evaluation Board Dimensions: 80 x 40 mm²)

5-2-1. Electrical Table


Characteristics		Specifications	Unit
Outline Dimensions		3.2 x 1.6 x 0.5	mm
Ground Plane Dimensions		80 x 40	mm
Working Frequency		1560~1606	MHz
VSWR (@ center frequency)*		2 Max.	
Characteristic Impedance		50	Ω
Polarization		Linear Polarization	
Peak Gain	(@ 1575.42MHz)	3.3 (typical)**	dBi
Efficiency		83 (typical)**	%

*Center frequency means the frequency with the lowest value in return loss of the chip antenna on the evaluation board..


**A Typical value is for reference only, not guaranteed.

5-2-2. Return Loss & VSWR

Return Loss (S₁₁)

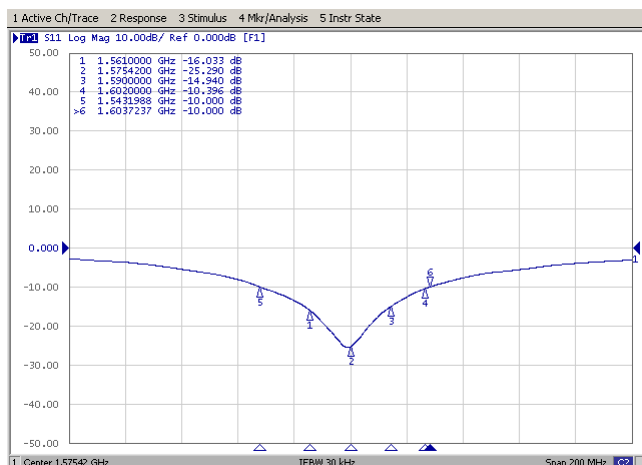

VSWR (S₁₁)

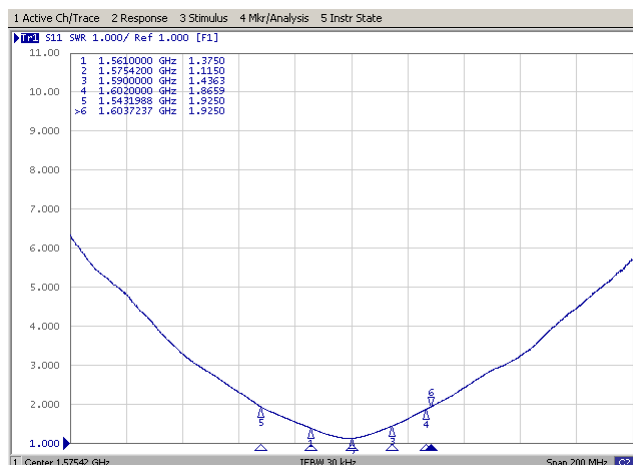

詠業科技股份有限公司
Unictron Technologies Corporation
Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : **Wen**

Designed by : **George**

Checked by : **Mike**

Approved by : **Herbert**

TITLE : 3.2 x 1.6 x 0.5 (mm) GNSS Ceramic Chip Antenna (AA088H) Engineering Specification


DOCUMENT NO.

H2UJ4W1H1A0100

REV. Pre

6. Outline Dimensions of Antenna & Evaluation Board (unit: mm)

6-1. Antenna Dimensions

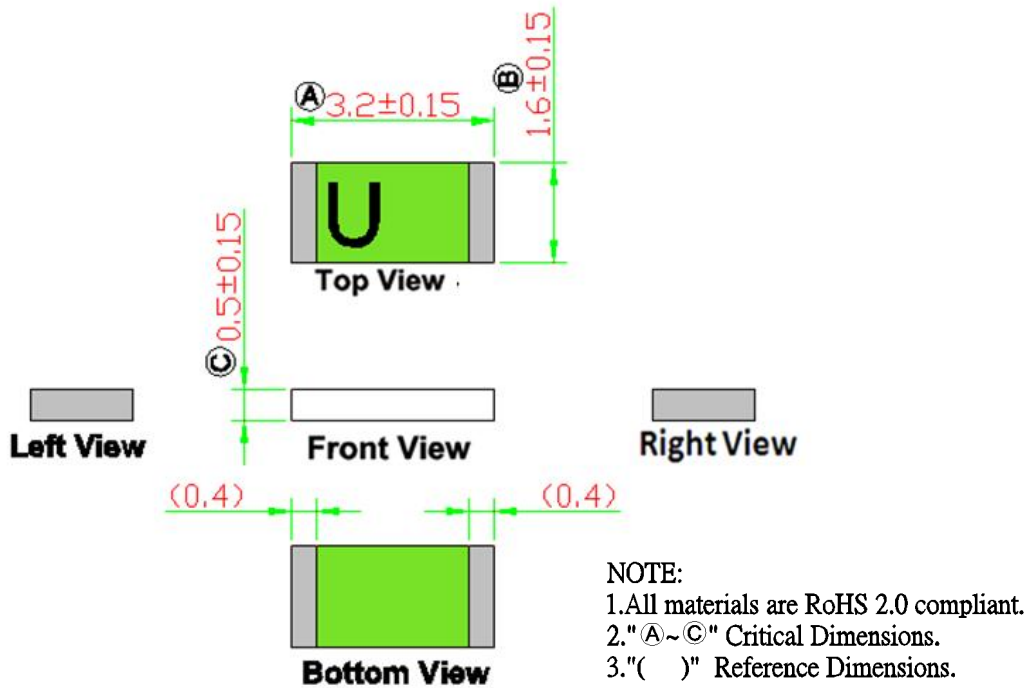

PIN Definitions



PIN	1	2
Soldering PAD	Signal	Tuning / Ground



詠業科技股份有限公司
Unictron Technologies Corporation
Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Wen

Designed by : George

Checked by : Mike

Approved by : Herbert

TITLE : 3.2 x 1.6 x 0.5 (mm) GNSS Ceramic Chip Antenna (AA088H) Engineering Specification


DOCUMENT NO.

H2UJ4W1H1A0100

REV.

Pre

6-2. Evaluation Board with Antenna

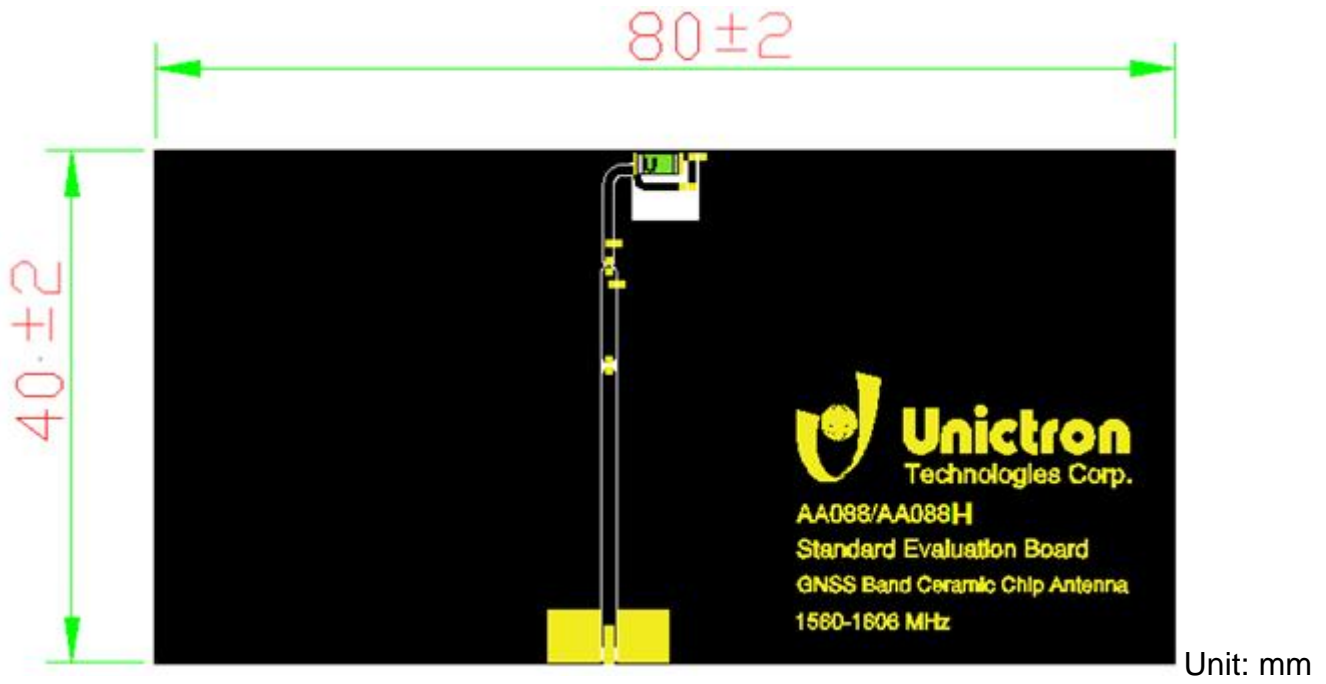

詠業科技股份有限公司
 Unicon Technologies Corporation
 Website: www.unicon.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : **Wen**

Designed by : **George**

Checked by : **Mike**

Approved by : **Herbert**

TITLE : 3.2 x 1.6 x 0.5 (mm) GNSS Ceramic Chip Antenna (AA088H) Engineering Specification





DOCUMENT NO.

H2UJ4W1H1A0100

REV.
Pre

7. Radiation Pattern (with 80 x 40 mm² Evaluation Board)

7-1. 3D Gain Pattern @ 1561 MHz (unit: dBi)

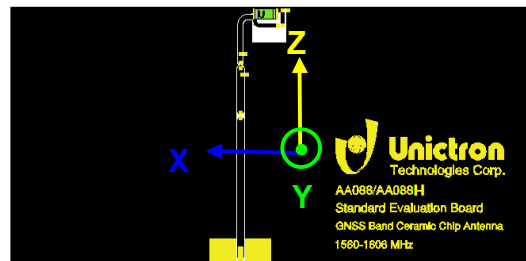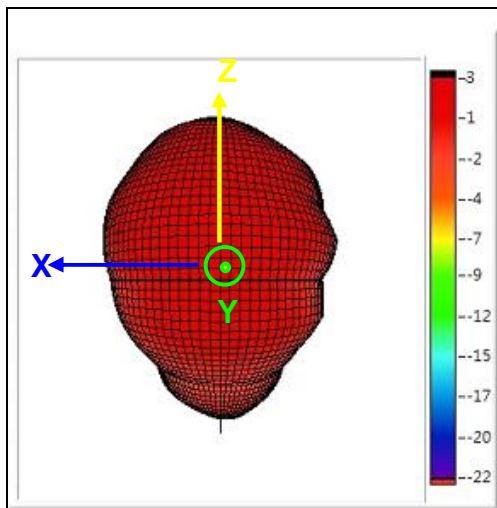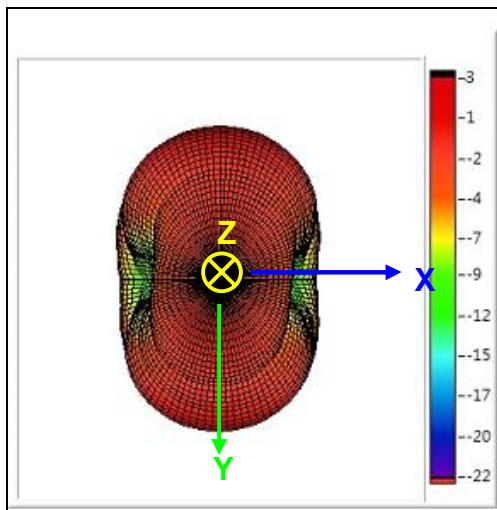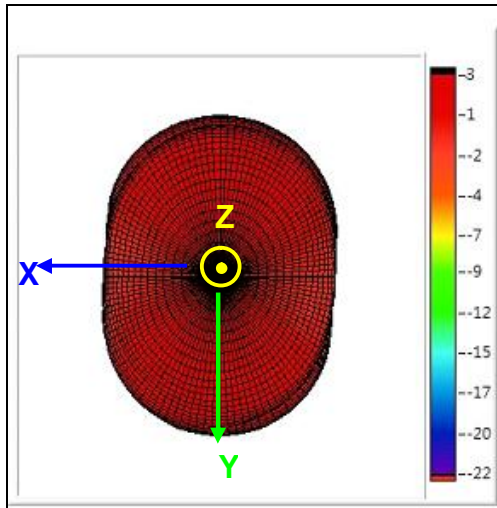

詠業科技股份有限公司
Unicon Technologies Corporation
Website: www.unicon.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Wen

Designed by : George

Checked by : Mike

Approved by : Herbert

TITLE : 3.2 x 1.6 x 0.5 (mm) GNSS Ceramic Chip Antenna (AA088H) Engineering Specification





DOCUMENT NO.

H2UJ4W1H1A0100

REV.

Pre

7-2. 3D Gain Pattern @ 1575.42 MHz (unit: dBi)

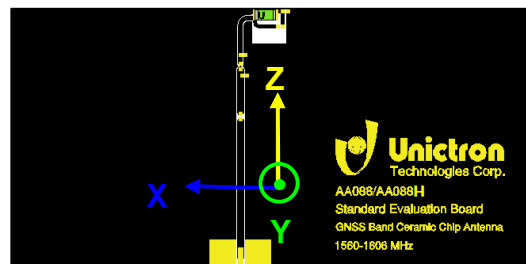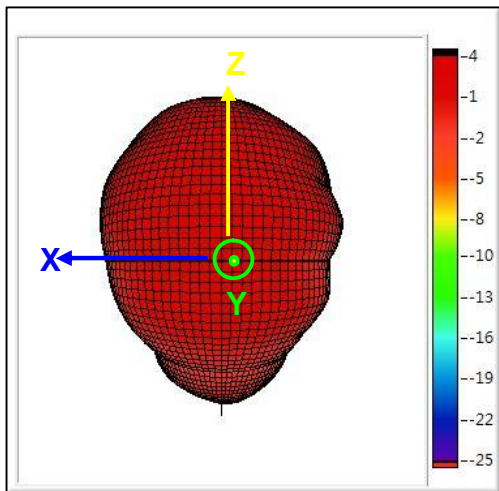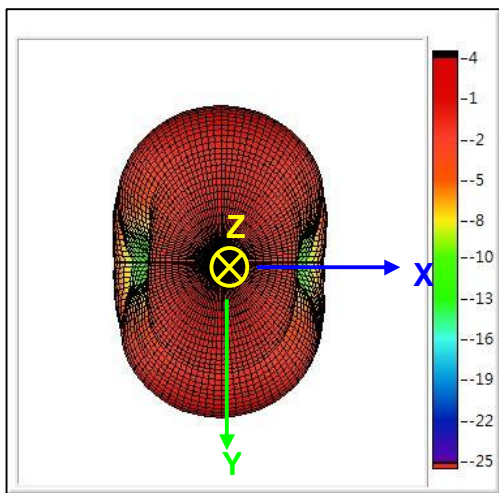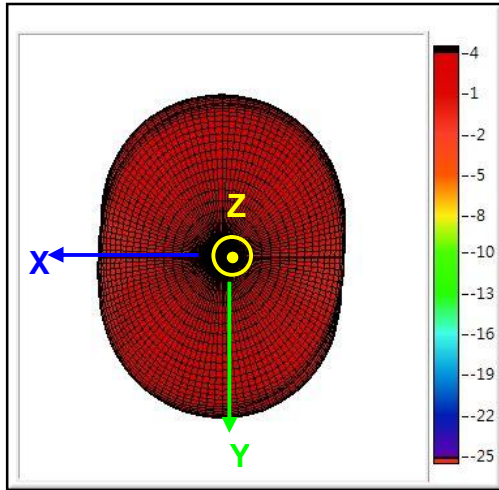

詠業科技股份有限公司
Unicon Technologies Corporation
Website: www.unicon.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Wen

Designed by : George

Checked by : Mike

Approved by : Herbert





TITLE : 3.2 x 1.6 x 0.5 (mm) GNSS Ceramic Chip Antenna (AA088H) Engineering Specification

DOCUMENT NO.

H2UJ4W1H1A0100

REV. Pre

7-3. 3D Gain Pattern @ 1590 MHz (unit: dBi)

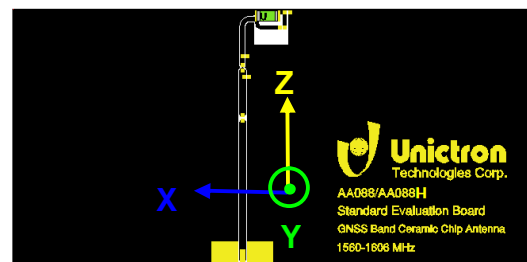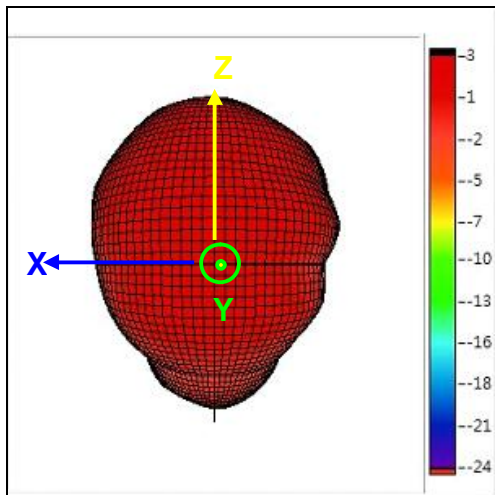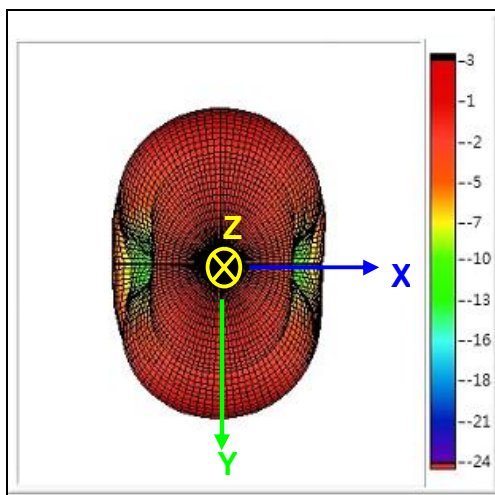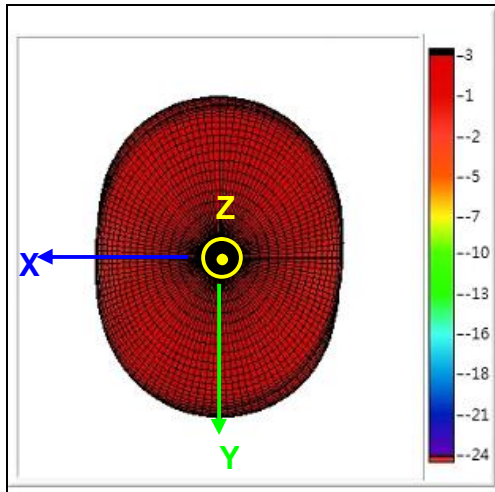

詠業科技股份有限公司
Unicon Technologies Corporation
Website: www.unicon.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Wen

Designed by : George

Checked by : Mike

Approved by : Herbert





TITLE : 3.2 x 1.6 x 0.5 (mm) GNSS Ceramic Chip Antenna (AA088H) Engineering Specification

DOCUMENT NO.

H2UJ4W1H1A0100

REV.
Pre

7-4. 3D Gain Pattern @ 1602 MHz (unit: dBi)

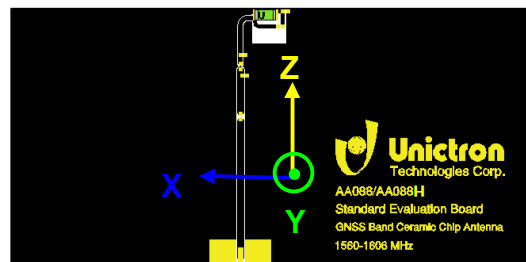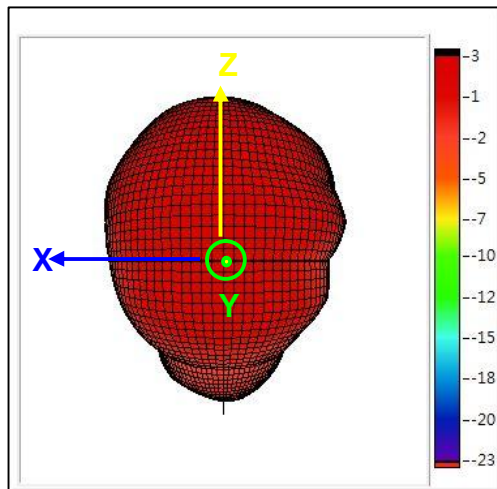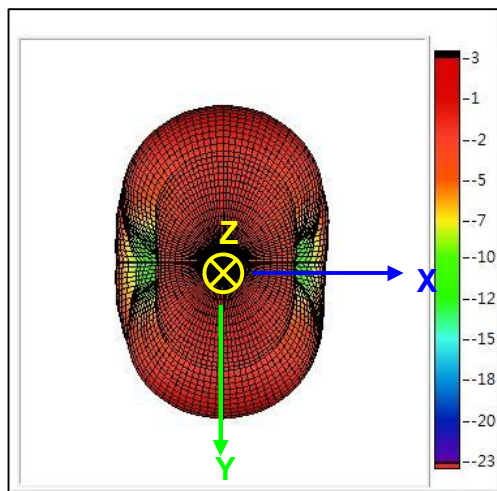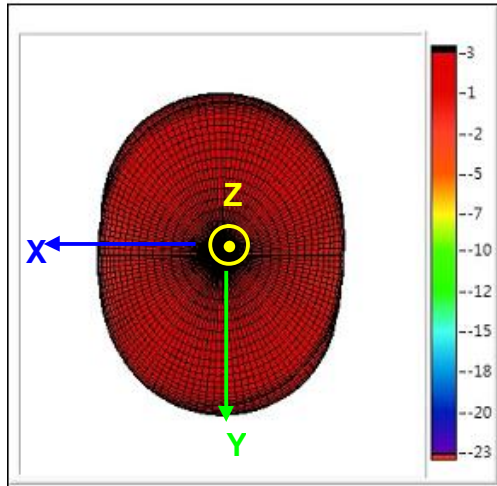

詠業科技股份有限公司
Unictron Technologies Corporation
Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Wen

Designed by : George

Checked by : Mike

Approved by : Herbert

TITLE : 3.2 x 1.6 x 0.5 (mm) GNSS Ceramic Chip Antenna (AA088H) Engineering Specification

DOCUMENT NO.

H2UJ4W1H1A0100

REV. Pre


7-5. 3D Efficiency Table

Frequency(MHz)	1560	1561	1562	1563	1564	1565	1566	1567	1568	1569	1570	1571	1572	1573	1574	1575	1576	1577
Efficiency(dB)	-1.7	-1.3	-1.2	-1.1	-1.0	-1.0	-0.9	-0.9	-0.9	-0.9	-0.8	-0.8	-0.8	-0.8	-0.8	-0.8	-0.8	-0.8
Efficiency(%)	67.9	74.3	76.2	77.6	79.1	80.0	80.6	81.1	81.7	82.2	83.4	83.8	84.0	83.6	83.4	83.4	83.6	84.0
Peak Gain(dBi)	2.8	2.9	3.0	3.1	3.1	3.1	3.2	3.2	3.2	3.2	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3

Frequency(MHz)	1578	1579	1580	1581	1582	1583	1584	1585	1586	1587	1588	1589	1590	1591	1592	1593	1594	1595
Efficiency(dB)	-0.8	-0.8	-0.8	-0.8	-0.8	-0.9	-0.9	-0.9	-0.9	-0.9	-0.9	-1.0	-1.1	-1.0	-1.0	-1.0	-1.1	-1.1
Efficiency(%)	84.0	84.2	83.8	82.4	82.4	82.2	82.2	81.9	81.5	80.7	80.6	79.8	78.5	78.7	78.7	78.7	78.2	77.6
Peak Gain(dBi)	3.3	3.3	3.3	3.2	3.2	3.1	3.1	3.1	3.1	3.1	3.0	3.0	2.9	2.9	2.9	2.9	2.9	2.8

Frequency(MHz)	1596	1597	1598	1599	1600	1601	1602	1603	1604	1605	1606
Efficiency(dB)	-1.2	-1.2	-1.2	-1.2	-1.2	-1.3	-1.7	-1.5	-1.5	-1.6	-1.7
Efficiency(%)	76.4	76.1	75.7	75.7	75.2	74.1	72.0	71.6	70.2	69.2	68.1
Peak Gain(dBi)	2.8	2.8	2.8	2.7	2.7	2.7	2.6	2.5	2.5	2.4	2.4

7-6. 3D Efficiency vs. Frequency

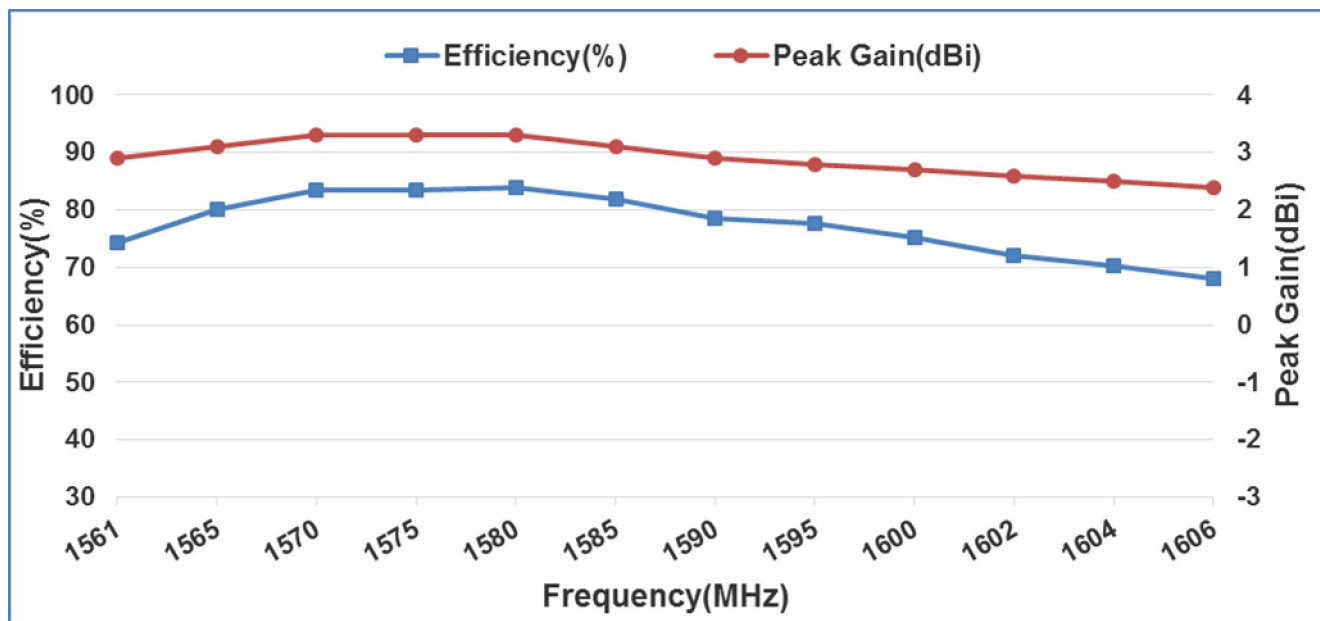

詠業科技股份有限公司
 Unictron Technologies Corporation
 Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : **Wen**

Designed by : **George**

Checked by : **Mike**

Approved by : **Herbert**

TITLE : 3.2 x 1.6 x 0.5 (mm) GNSS Ceramic Chip Antenna (AA088H) Engineering Specification


DOCUMENT NO.

H2UJ4W1H1A0100

REV.
Pre


8. Frequency tuning and Matching circuit

8-1. Chip antenna tuning scenario :

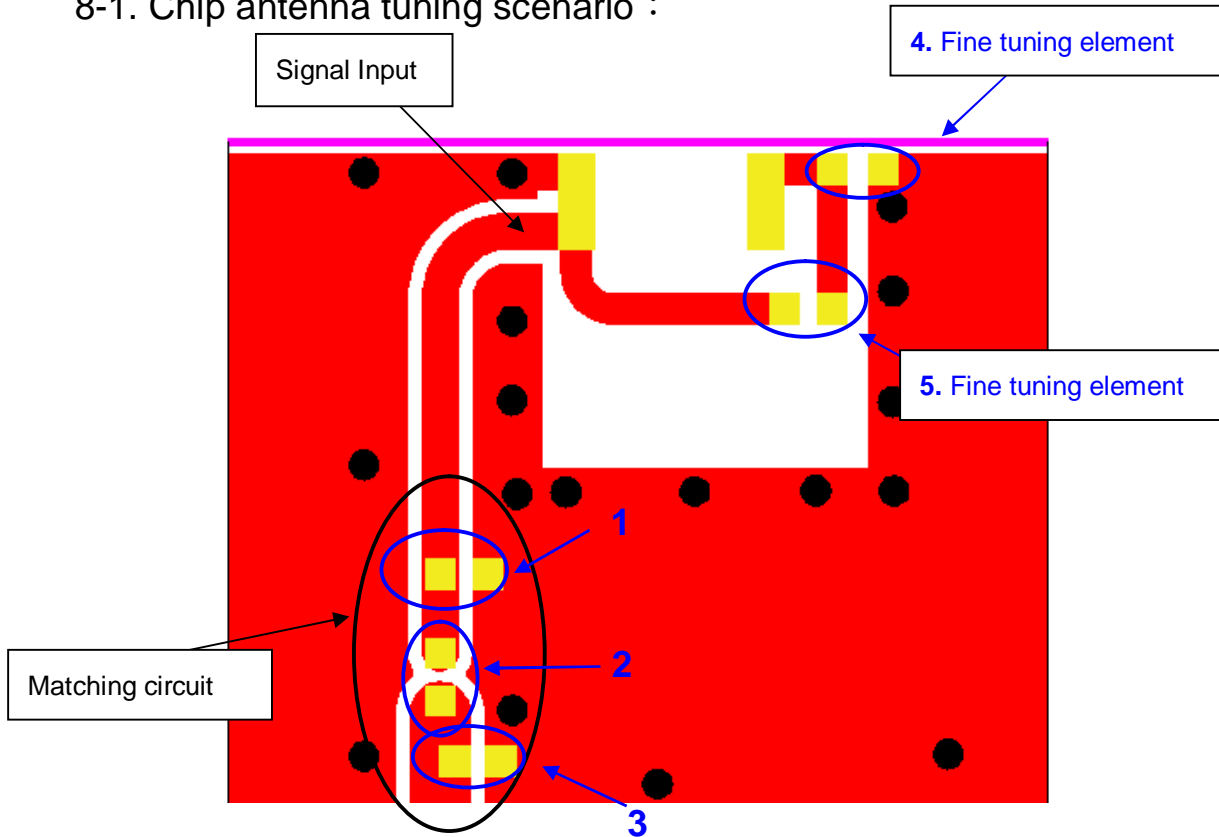

8-2. Matching circuit :

With the following recommended values of matching and tuning components, the Center frequency will be about 1575.42 MHz at our standard 80 x 40 mm² evaluation board. However, these are typical reference values which may need to be changed when circuit boards or part vendors are different.

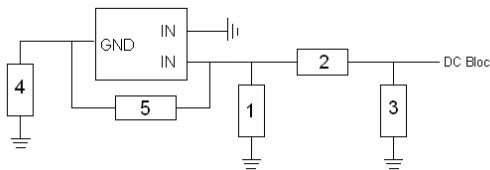

System Matching Circuit Component			
Location	Description	Vendor	Tolerance
1	N/A	-	-
2	2.7 pF, (0402)	DARFON	±0.1pF
3	1.5 pF, (0402)	DARFON	±0.1pF
4	Fine tuning element 3.9 pF, (0402)	DARFON	±0.1pF
5	Fine tuning element 1 pF, (0402)	DARFON	±0.05pF



詠業科技股份有限公司
Unictron Technologies Corporation
Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : **Wen**

Designed by : **George**

Checked by : **Mike**

Approved by : **Herbert**

TITLE : 3.2 x 1.6 x 0.5 (mm) GNSS Ceramic Chip Antenna (AA088H) Engineering Specification


DOCUMENT NO.

H2UJ4W1H1A0100


REV.

Pre

8-3. Reference for frequency tuning element

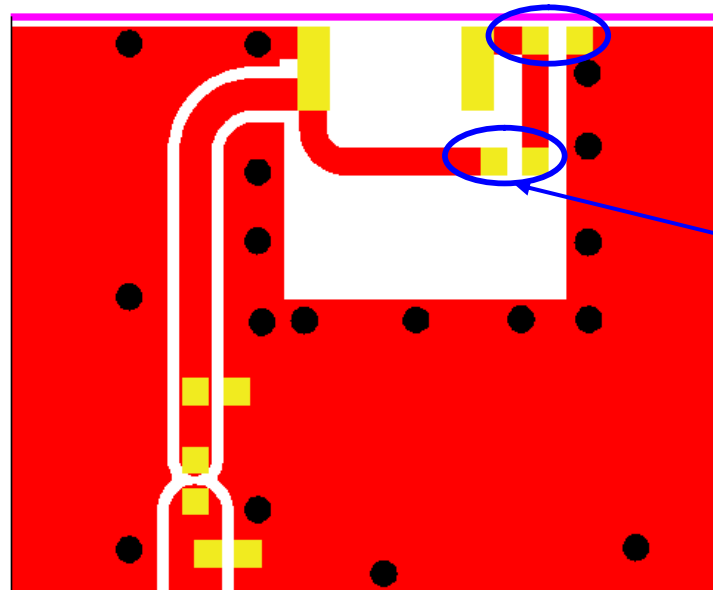

When this tuning element kept at 1 pF

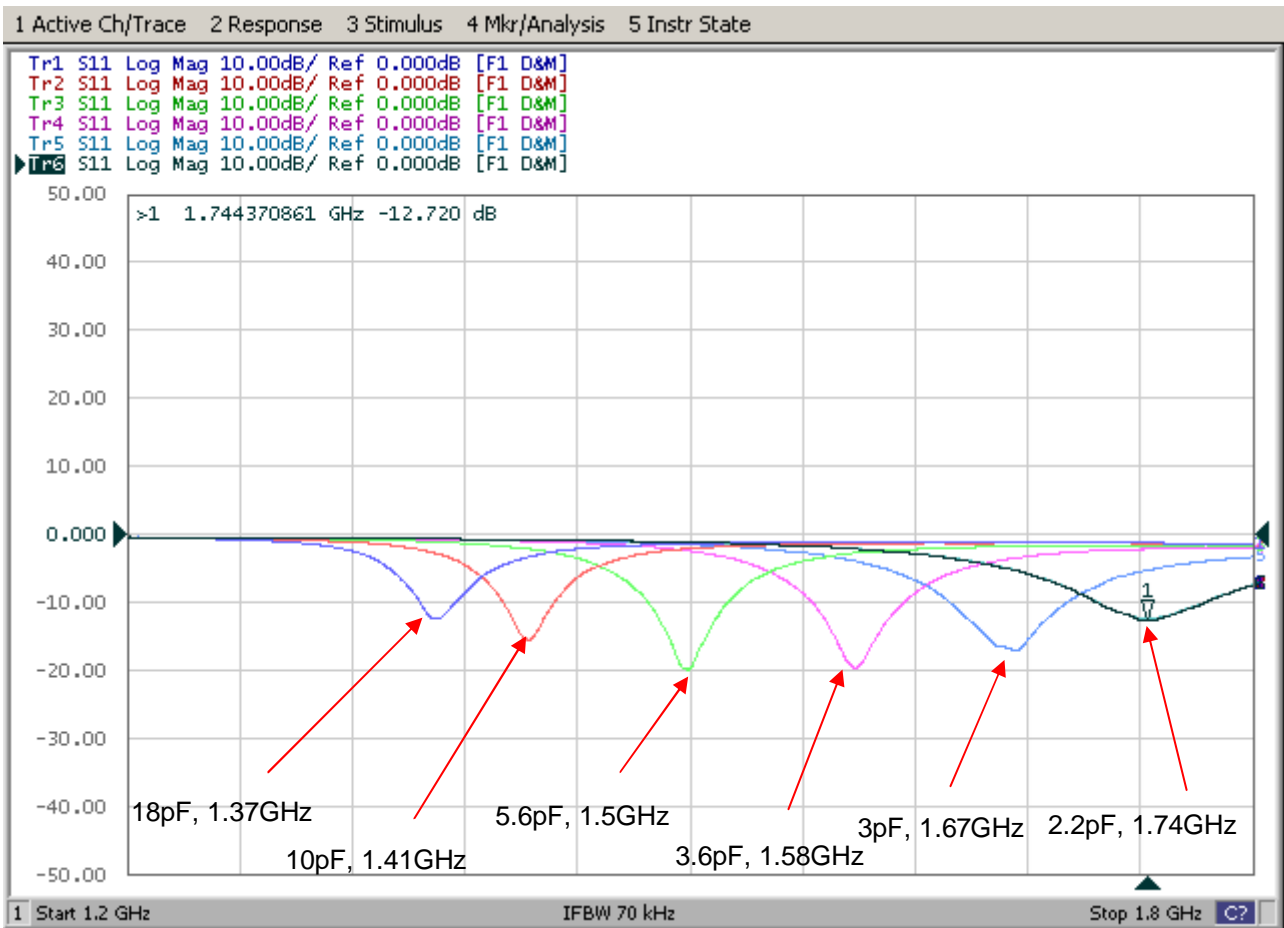

詠業科技股份有限公司
Unictron Technologies Corporation
Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Wen

Designed by : George

Checked by : Mike

Approved by : Herbert

TITLE : 3.2 x 1.6 x 0.5 (mm) GNSS Ceramic Chip Antenna (AA088H) Engineering Specification


DOCUMENT NO.

H2UJ4W1H1A0100

REV. Pre

9. Soldering Conditions

9-1. Typical Soldering Profile for Lead-free Process

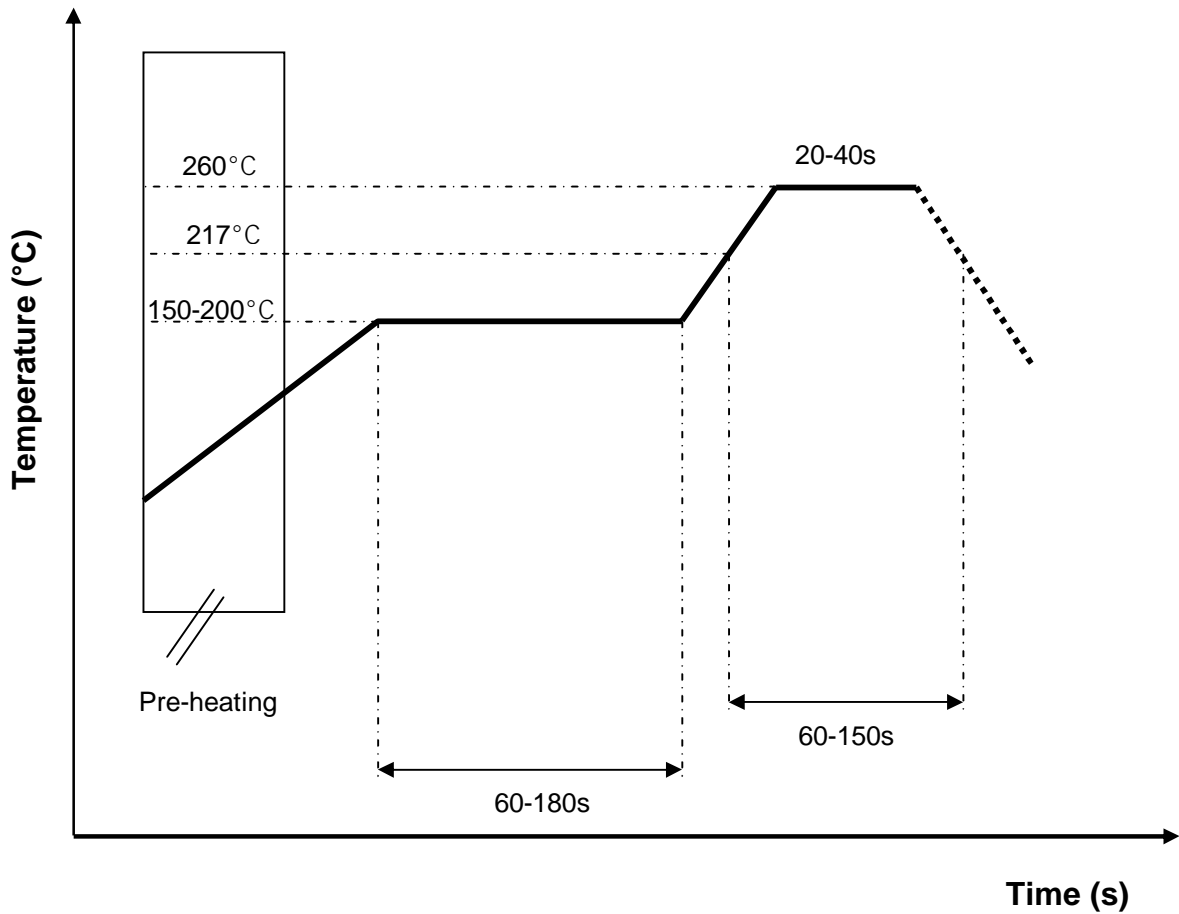

*Recommended solder paste alloy: SAC305 (Sn96.5 /Ag3 /Cu0.5) Lead Free solder paste



詠業科技股份有限公司
Unictron Technologies Corporation
Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Wen

Designed by : George

Checked by : Mike

Approved by : Herbert

TITLE : 3.2 x 1.6 x 0.5 (mm) GNSS Ceramic Chip Antenna (AA088H) Engineering Specification

DOCUMENT NO.

H2UJ4W1H1A0100

REV.
Pre


10. Reminders for users of Unictron's AA088H ceramic chip antennas

- 10-1. This chip antenna is made of ceramic materials which are relatively more rigid and brittle compared to printed circuit board materials. Bending of circuit board at the locations where chip antenna is mounted may cause the cracking of solder joints or antenna itself.
- 10-2. Punching/cutting of the break-off tab of PCB panel may cause severe bending of the circuit board which may result in cracking of solder joints or chip antenna itself. Therefore break-off tab shall be located away from the installation site of chip antenna.
- 10-3. Be cautious when ultrasonic welding process needs to be used near the locations where chip antennas are installed. Strong ultrasonic vibration may cause the cracking of chip antenna solder joints.

11. Packing

- (1) Quantity/Reel: 5000 pcs/Reel
- (2) Plastic tape:

a. Tape Drawing

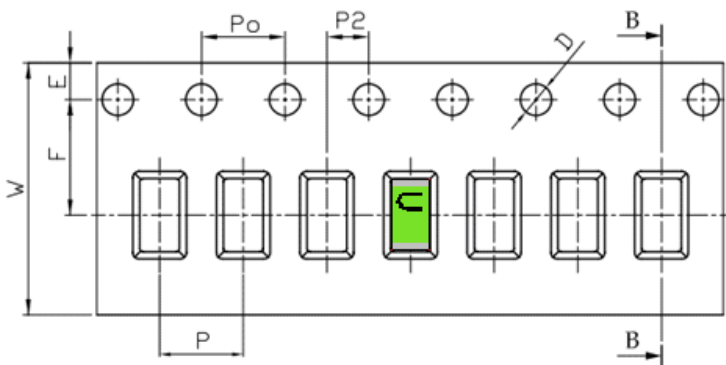

b. Tape Dimensions (unit: mm)

Feature	Specifications	Tolerances
W	12.00	±0.30
P	4.00	±0.10
E	1.75	±0.10
F	5.50	±0.10
P2	2.00	±0.10
D	1.50	+0.10 -0.00
P0	4.00	±0.10
10P0	40.00	±0.20



詠業科技股份有限公司
Unictron Technologies Corporation
Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Wen

Designed by : George

Checked by : Mike

Approved by : Herbert


TITLE : 3.2 x 1.6 x 0.5 (mm) GNSS Ceramic Chip Antenna (AA088H) Engineering Specification

DOCUMENT NO.


H2UJ4W1H1A0100

REV.
Pre

c. Reel Drawing

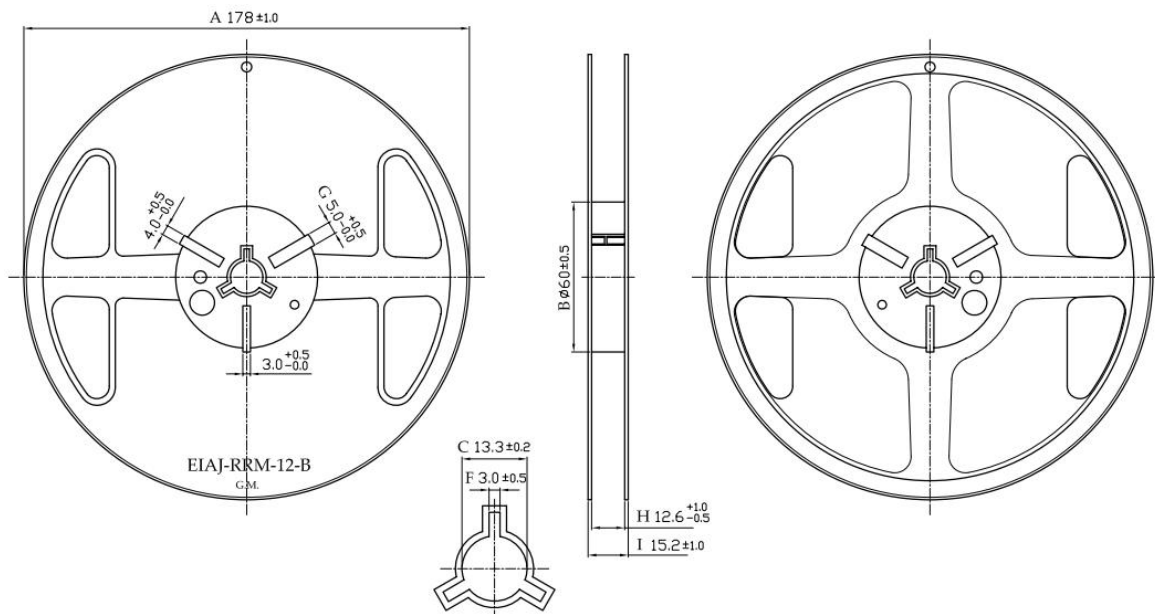

d. Drawing of small size carton in developed view

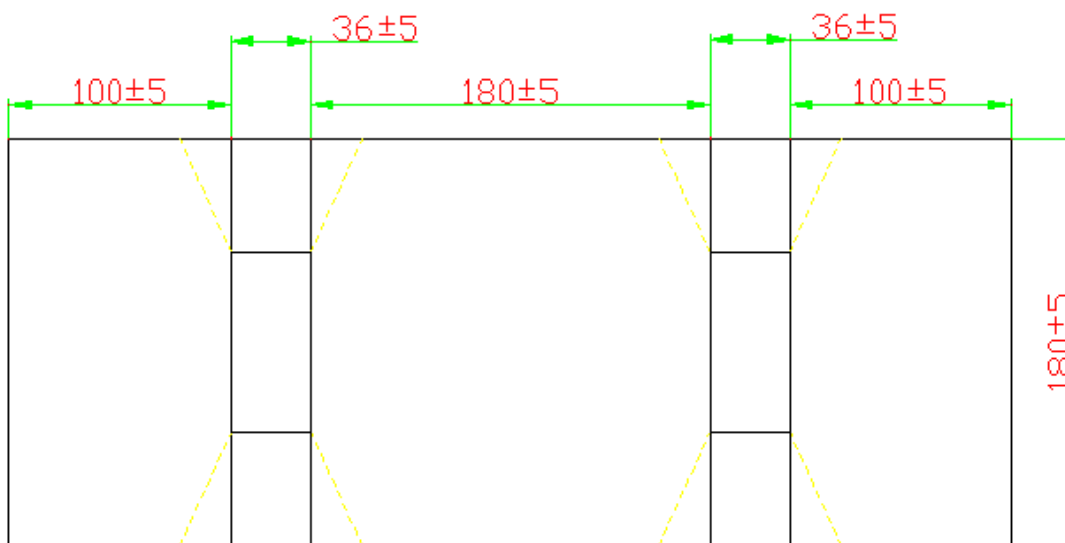

詠業科技股份有限公司
Unictron Technologies Corporation
Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Wen

Designed by : George

Checked by : Mike

Approved by : Herbert


TITLE : 3.2 x 1.6 x 0.5 (mm) GNSS Ceramic Chip Antenna (AA088H) Engineering Specification

DOCUMENT NO.


H2UJ4W1H1A0100

REV. Pre

e. Drawing of middle size carton in developed view

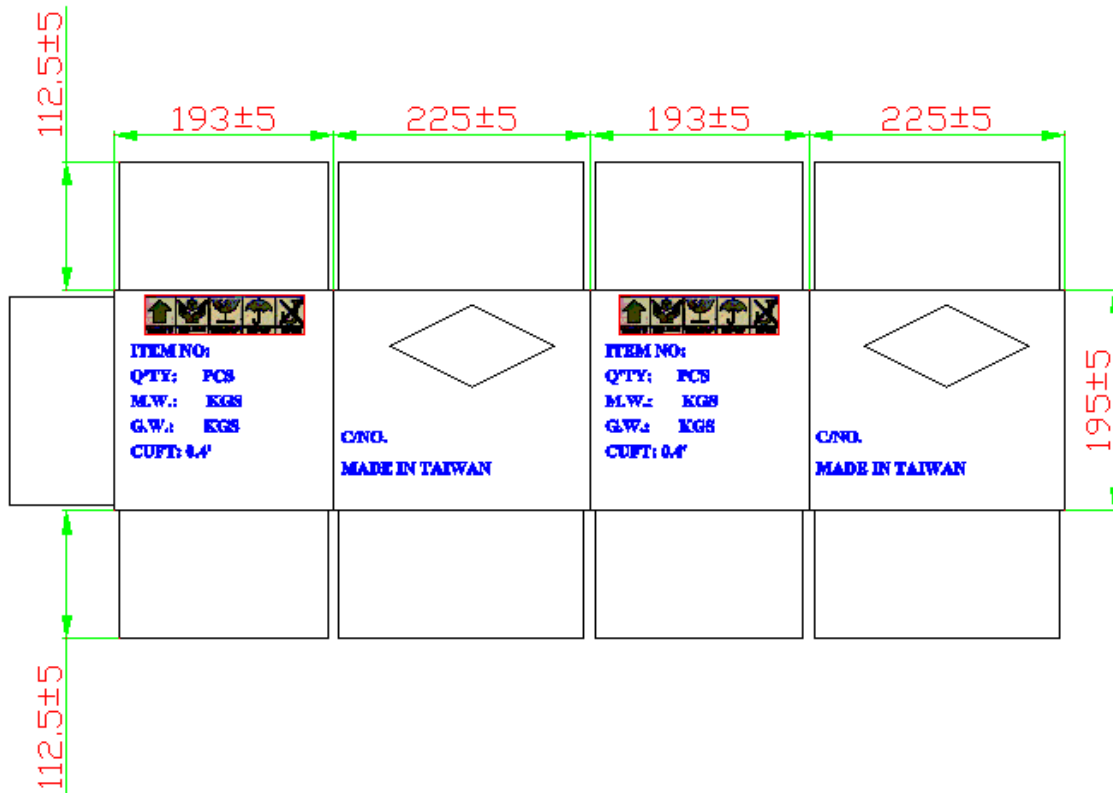

e. Drawing of large size carton in developed view

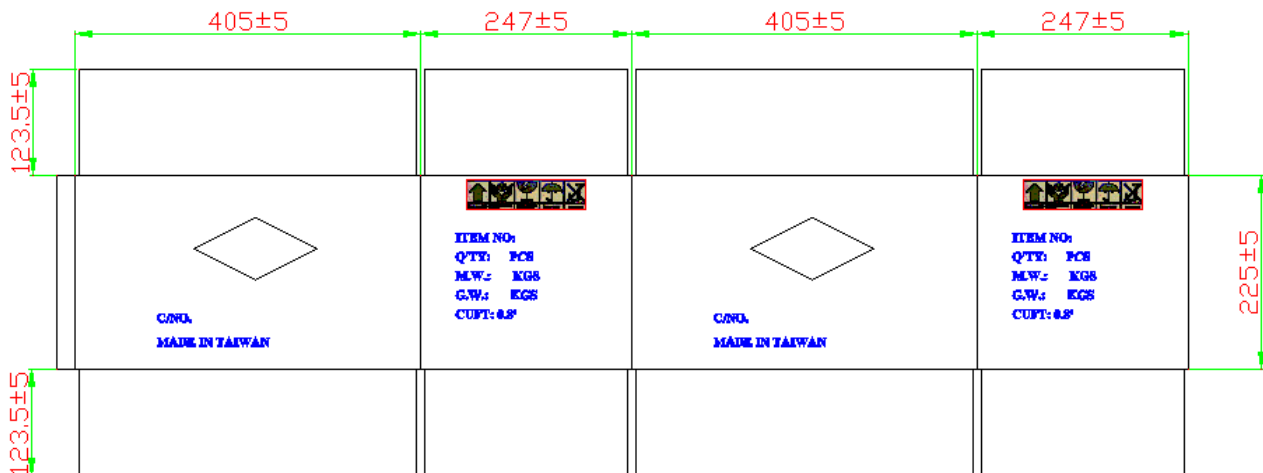

詠業科技股份有限公司
Unictron Technologies Corporation
Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : **Wen**

Designed by : **George**

Checked by : **Mike**

Approved by : **Herbert**


TITLE : 3.2 x 1.6 x 0.5 (mm) GNSS Ceramic Chip Antenna (AA088H) Engineering Specification

DOCUMENT NO.

H2UJ4W1H1A0100

REV.
Pre

f. Picture of label

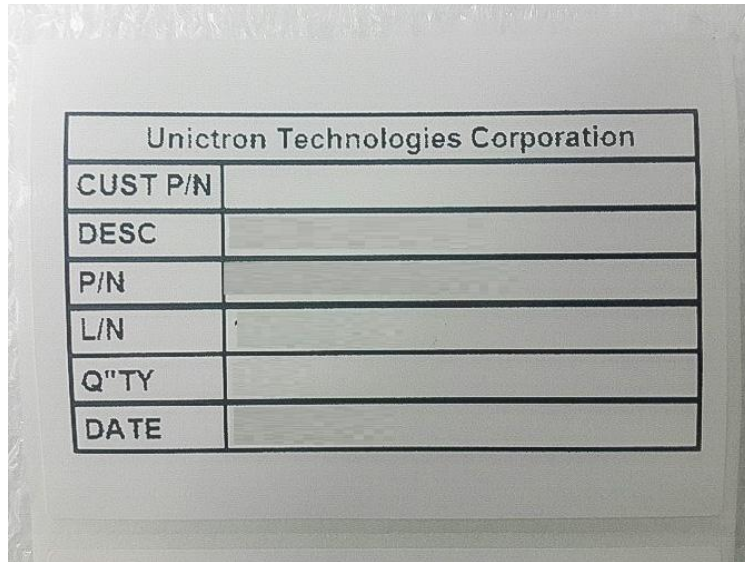

g. Reel with label



詠業科技股份有限公司
Unictron Technologies Corporation
Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : **Wen**

Designed by : **George**

Checked by : **Mike**

Approved by : **Herbert**

TITLE : 3.2 x 1.6 x 0.5 (mm) GNSS Ceramic Chip Antenna (AA088H) Engineering Specification

DOCUMENT NO.

H2UJ4W1H1A0100

REV.
Pre

h. Small size carton with label



i. Middle size carton with label



詠業科技股份有限公司
Unictron Technologies Corporation
Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : **Wen**

Designed by : **George**

Checked by : **Mike**

Approved by : **Herbert**

TITLE : 3.2 x 1.6 x 0.5 (mm) GNSS Ceramic Chip Antenna (AA088H) Engineering Specification

DOCUMENT NO.


H2UJ4W1H1A0100

REV. Pre


11-2. Process of packing




1 reel includes 5,000pcs(max.) chip antennas



1 small size carton includes 2pcs(max.) reels



1 middle size carton includes 5pcs(max.) small cartons



1 large size carton includes 2pcs(max.) middle cartons

12. Operating & Storage Conditions

12-1. Operating

- (1) Maximum Input Power: 2 W
- (2) Operating Temperature: -40°C to 85°C

12-2. Storage

- (1) Storage Temperature: -5°C to 40°C
- (2) Relative Humidity: 20% to 70%
- (3) Shelf Life: 1 year

12-3. Storage (unsealed)

Meet the criteria of J-STD-033 MSL2a



詠業科技股份有限公司
Unictron Technologies Corporation
Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : **Wen**

Designed by : **George**

Checked by : **Mike**

Approved by : **Herbert**

TITLE : 3.2 x 1.6 x 0.5 (mm) GNSS Ceramic Chip Antenna
(AA088H) Engineering Specification

DOCUMENT NO.

H2UJ4W1H1A0100

REV.

Pre

12-4. Storage (After mounted on customer's PCB with SMT process)

- (1) Storage Temperature: -40°C to 85°C
- (2) Relative Humidity: 10% to 70%

13. Notice

- (1) Installation Guide:

Please refer to Unictron's application note "General guidelines for the installation of Unictron's chip antennas" for further information.

- (2) All specifications are subject to change without notice.



詠業科技股份有限公司
Unictron Technologies Corporation
Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : **Wen** Designed by : **George** Checked by : **Mike** Approved by : **Herbert**

TITLE : 3.2 x 1.6 x 0.5 (mm) GNSS Ceramic Chip Antenna (AA088H) Engineering Specification	DOCUMENT NO.	H2UJ4W1H1A0100	REV.
			Pre