5.0 x 3.0 x 0.5 (mm) ISM 868 MHz Ceramic Chip Antenna (AA701H)

Engineering Specification

1. **Product Number**

Н U 1 Н 2 В 4 0 0



2. **Features**

- *Stable and reliable in performances
- *Low profile, compact size
- *RoHS compliance
- *SMT processes compatible

3. **Applications**

- *Short Range Devices (SRD)
- *IoT applications
- *Alarm system

4. **Description**

Unictron's AA701H ceramic chip antenna is designed for ISM 868MHz band applications, covering frequencies 863~870 MHz. Fabricated with proprietary design and processes, AA701H shows excellent performance and is fully compatible with SMT processes which can decrease the assembly cost and improve device sequality and consistency.

2018-08-01

Control Center



詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by: Wen Designed by : Peter Checked by : Mike Approved by : Herbert

TITLE: 5.0 x 3.0 x 0.5 (mm) ISM 868MHz Ceramic Chip Antenna (AA701H) Engineering Specification

DOCUMENT NO.

H2U64U1H2B0400


REV. Α

5. Layout Guide & Electrical Specifications


5-1. Layout Guide (unit: mm)

Solder Land Pattern:

The solder land pattern (gold marking areas) is shown below. Recommendation on matching circuit will be provided according to customer's installation conditions.

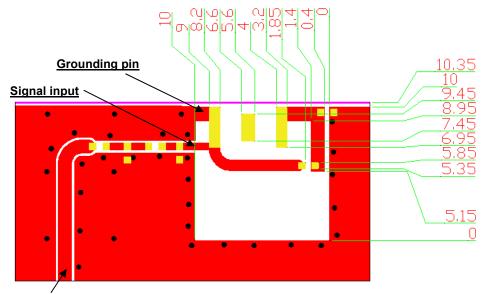

Transmission Line with 50Ω Impedance Characteristic

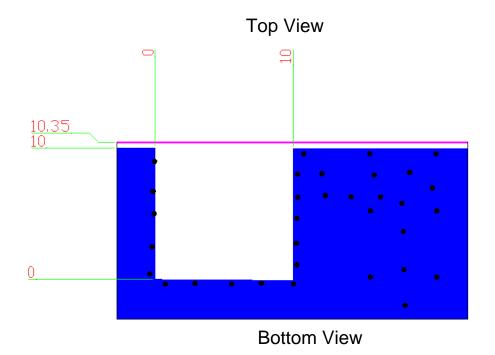

Unictron
Technologies Corp.

2018-08-01

Document Control Center

Unictron Technologies Corp.

詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Wen Designed by : Peter Checked by : Mike Approved by : Herbert

TITLE: 5.0 x 3.0 x 0.5 (mm) ISM 868MHz Ceramic Chip Antenna (AA701H) Engineering Specification DOCUMENT NO.

H2U64U1H2B0400


5-2. Electrical Specifications (Evaluation Board Dimensions: 80 x 40 mm²)

|--|

Characteristics		Specifications	Unit
Outline Dimension	ons	5.0 x 3.0 x 0.5	mm
Ground Plane Dimensions		80 x 40	mm
Working Frequency		863~870	MHz
VSWR (@ center frequency)*		2 Max.	
Characteristic Impedance		50	Ω
Polarization		Linear Polarization	
Peak Gain	(@868 MHz)	0 (typical)	dBi
Efficiency	(© 000 Wil 12)	47 (typical)	%

^{*}Center frequency means the frequency with the lowest value in return loss of the chip antenna on the evaluation board.

5-2-2. Frequency vs. V.S.W.R. and Total Radiation Gain

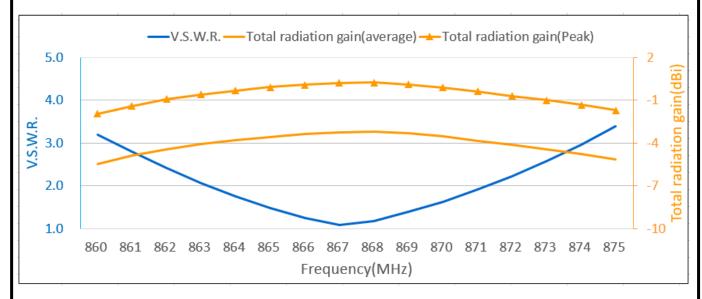

Unictron
Technologies Corp.

2018-08-01

Document

Unictron
Technologies Corp.

詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com


THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION


Prepared by: Wen Designed by: Peter Checked by: Mike Approved by: Herbert

TITLE: 5.0 x 3.0 x 0.5 (mm) ISM 868MHz Ceramic Chip Antenna (AA701H) Engineering Specification DOCUMENT NO.

H2U64U1H2B0400


^{**}A typical value is for reference only, not guaranteed.

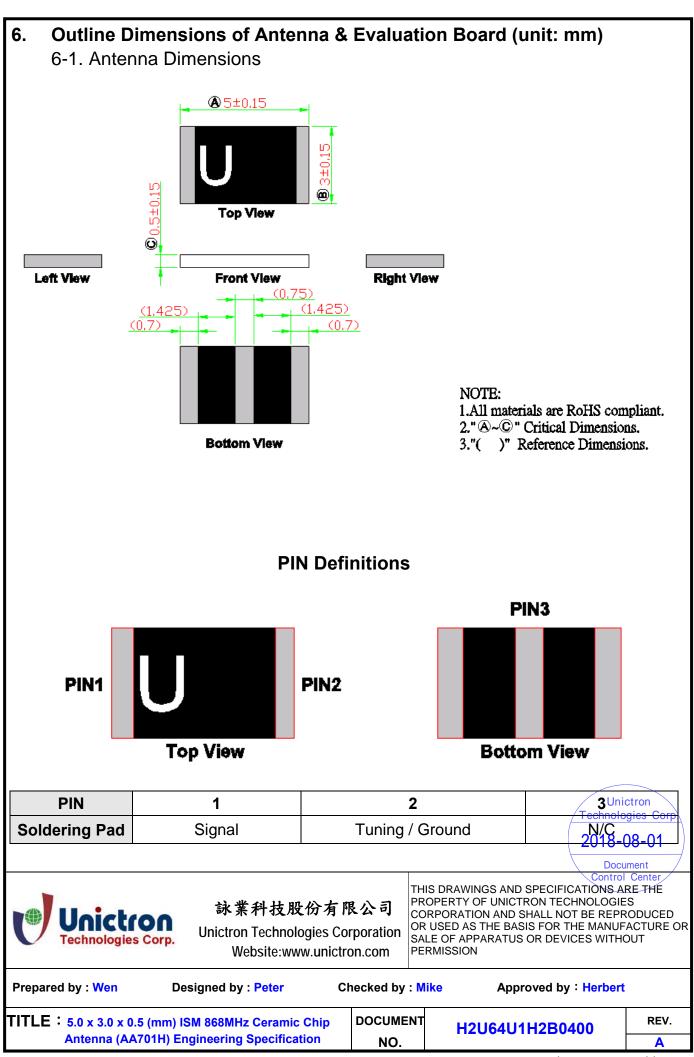


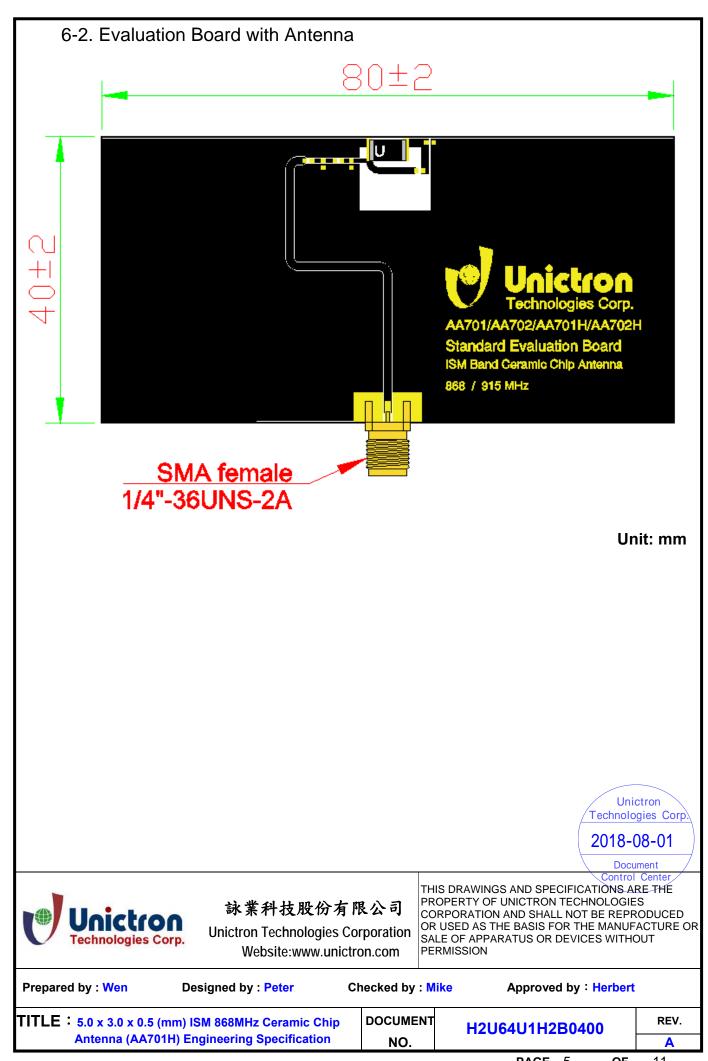



7. Radiation Pattern (with 80 x 40 mm² Evaluation Board)

3D Gain Pattern @ 868 MHz (unit: dBi)

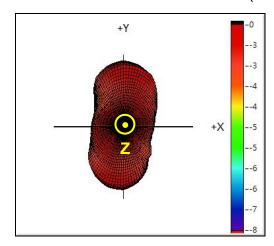

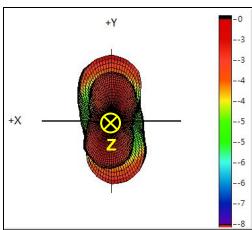

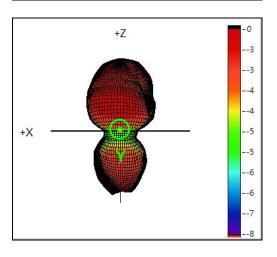



Unictron
Technologies Corp.

2018-08-01

Document



詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Wen Designed by : Peter Checked by : Mike Approved by : Herbert


TITLE: 5.0 x 3.0 x 0.5 (mm) ISM 868MHz Ceramic Chip

Antenna (AA701H) Engineering Specification

H2U64U1H2B0400


8. **Frequency Tuning and Matching Circuit**

8-1. Chip antenna tuning scenario:

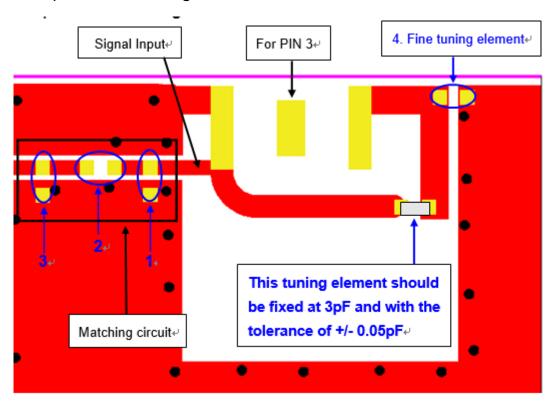

8-2. Matching circuit:

With the following recommended values of matching and tuning components, the center frequencies will be about 868 MHz at our standard 80x40 mm² evaluation board. However, these are typical reference values which may need to be changed when circuit boards or part vendors are different.

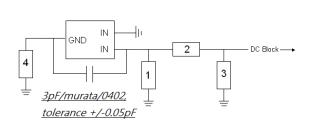

System Matching Circuit Component				
Location	Description	Vendor	Tolerance	
1	N/A	-	-	
2	2.7nH, (0402)	Murata	±0.1nH	
3	N/A	-	-	
4 Fine tuning element	3.9 pF, (0402)	Murata	±0.05pF	

Unictron Technologies Corp.

2018-08-01



詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by: Wen Designed by: Peter Checked by: Mike Approved by : Herbert


TITLE: 5.0 x 3.0 x 0.5 (mm) ISM 868MHz Ceramic Chip **Antenna (AA701H) Engineering Specification**


DOCUMENT NO.

H2U64U1H2B0400

REV. Α

8-3. Reference for use of the frequency tuning element

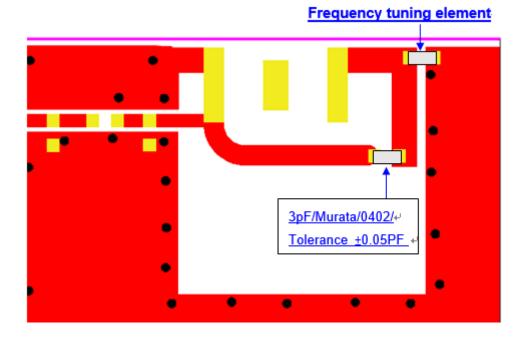

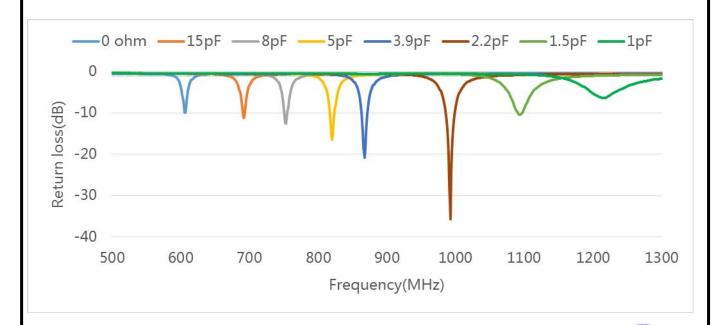

Unictron
Technologies Corp.

2018-08-01

Document



詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION


Prepared by: Wen Designed by: Peter Checked by: Mike Approved by: Herbert

TITLE: 5.0 x 3.0 x 0.5 (mm) ISM 868MHz Ceramic Chip Antenna (AA701H) Engineering Specification DOCUMENT NO.

H2U64U1H2B0400

9. Soldering Conditions

Typical Soldering Profile for Lead-free Process

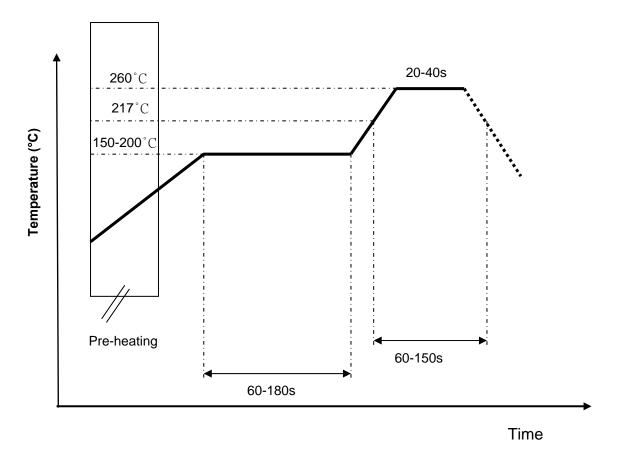

10. Reminders for users of Unictron's AA701H ceramic chip antennas

- 10-1. This chip antenna is made of ceramic materials which are relatively more rigid and brittle compared to circuit board materials. Furthermore, the length of this antenna is quite long. Bending of circuit board at the locations where chip antenna is mounted may cause the cracking of solder joints or antenna itself.
- 10-2. Punching/cutting of the break-off tab of PCB panel may cause severe bending of the circuit board which may result in cracking of solder joints or chip antenna itself. Therefore break-off tab shall be located away from the installation site of chip antenna.
- 10-3. Be cautious when ultrasonic welding process needs to be used near the locations where chip antennas are installed. Strong ultrasonic vibration may cause then cracking of chip antenna solder joints.

 2018-08-01



詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Wen Designed by : Peter Checked by : Mike Approved by : Herbert

TITLE : 5.0 x 3.0 x 0.5 (mm) ISM 868MHz Ceramic Chip DOCUMENT H2U64L14H2B0400

Antenna (AA701H) Engineering Specification


DOCUMENT NO.

H2U64U1H2B0400

11. Packing

- (1) Quantity/Reel: 6000 pcs/Reel
- (2) Plastic tape:

a. Tape Drawing

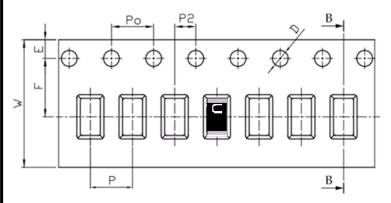

b. Tape Dimensions (unit: mm)

	T	
Feature	Specifications	Tolerances
W	12.00	±0.30
Р	8.00	±0.10
Е	1.75	±0.10
F	5.50	±0.10
P2	2.00	±0.10
D	1.50	+0.10
	1.50	-0.00
Ро	4.00	±0.10
10Po	40.00	±0.20

12. Operating & Storage Conditions

12-1. Operating

- (1) Maximum Input Power: 2 W
- (2) Operating Temperature: -40 $^{\circ}$ C to 85 $^{\circ}$ C
- (3) Relative Humidity: 10% to 70%

12-2. Storage (sealed)

- (1) Storage Temperature: -5°C to 40°C
- (2) Relative Humidity: 20% to 70%
- (3) Shelf Life: 1 year

12-3. Storage (unsealed)

Meet the criteria of J-STD-033 MSL2a

12-4. Storage (After mounted on customer's PCB with SMT process)

- (2) Relative Humidity: 10% to 70%

Unictron Technologies Corp.

2018-08-01

Document Control Cente



詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by: Wen Designed by: Peter Checked by: Mike Approved by: Herbert

TITLE: 5.0 x 3.0 x 0.5 (mm) ISM 868MHz Ceramic Chip Antenna (AA701H) Engineering Specification DOCUMENT NO.

H2U64U1H2B0400

13. Notice

(1) Installation Guide:

Please refer to Unictron's application note "General guidelines for the installation of Unictron's chip antennas" for further information.

(2) All specifications are subject to change without notice.

.

Unictron Technologies Corp.

2018-08-01

Document Control Center



詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by: Wen Designed by: Peter Checked by: Mike Approved by: Herbert

TITLE: 5.0 x 3.0 x 0.5 (mm) ISM 868MHz Ceramic Chip Antenna (AA701H) Engineering Specification DOCUMENT NO.

H2U64U1H2B0400

REV.

PAGE 11 **OF** 11