


5. Layout Guide & Electrical Specifications

5-1. Layout Guide (unit : mm)

Solder Land Pattern:

The solder land pattern (gray marking areas) is shown below. Recommendation on matching circuit will be provided according to customer's installation conditions.

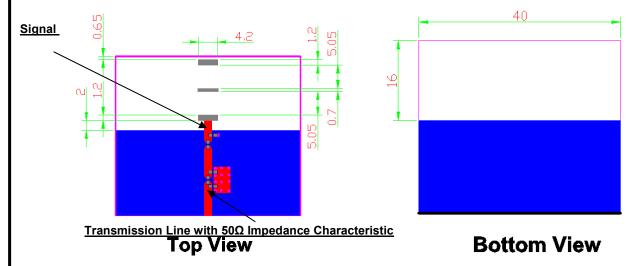

5-2. Electrical Specifications (Evaluation Board Dimensions: 80 x 40 mm²) 5-2-1. Electrical Table

Characteristics		Specifications	Unit	
Outline Dimensions		12.0 x 4.0 x 1.6	mm	
Ground Plane Dimensions		64 x 40	mm	
Working Frequency		902 ~ 928	MHz	
VSWR (@ center frequency)*		2 Max.		
Characteristic Impedance		50	Ω	
Polarization		Linear Polarization		
Peak Gain	(@ 915 MHz)	-0.98 (typical)**	dBi	
Efficiency		32.9 (typical)**	%	
*Center frequency means the frequency with the lowest value in return loss of the chip antenna on the evaluation board.				
**A typical value is for reference only, not guaranteed.			Unictron	

Technologies Corp. 2017-05-19

Document

Control Center



Prepared by : Xenia

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES 詠業科技股份有限公司 CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR Unictron Technologies Corporation SALE OF APPARATUS OR DEVICES WITHOUT


Website:www.unictron.com


Designed by : Peter


PERMISSION


	DOCUMENT	H2U66J1K2C0100	REV.
(C912D5) Engineering Specification	NO.		C
		PAGE 2 OF	9

Checked by : Mike Approved by : Herbert

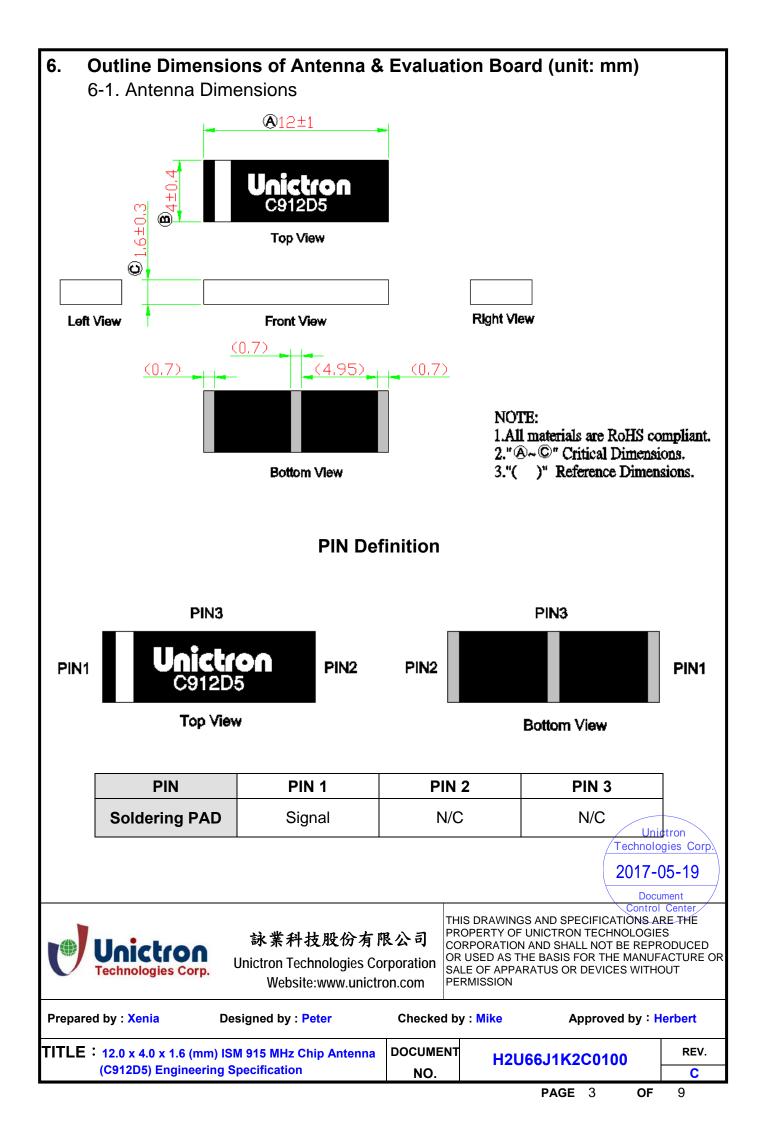

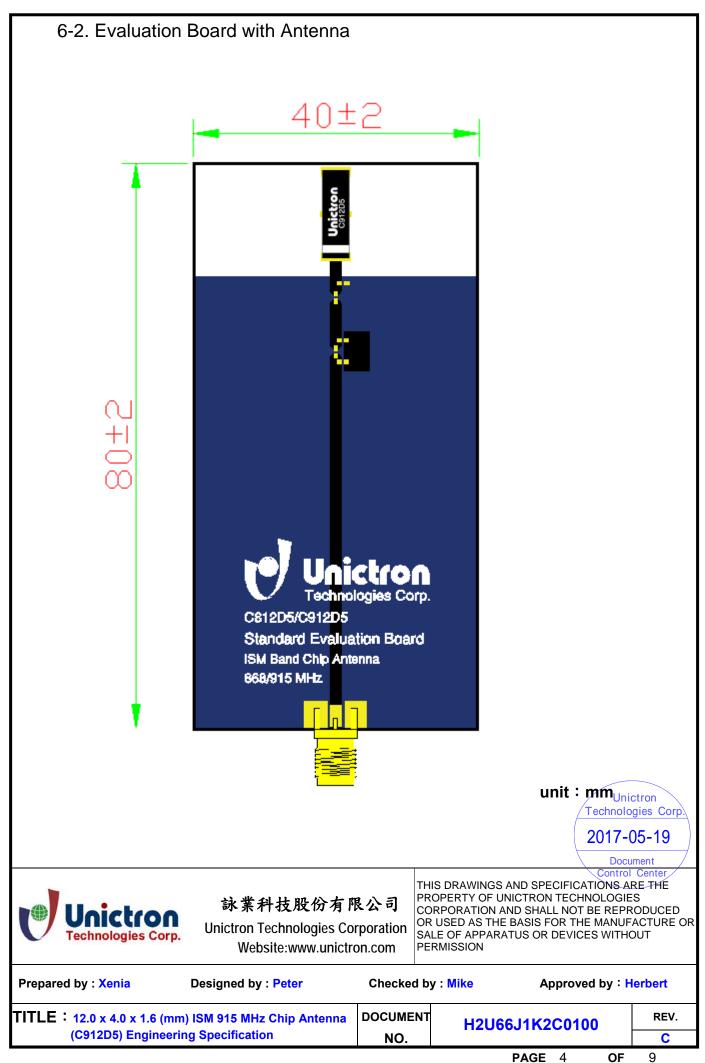


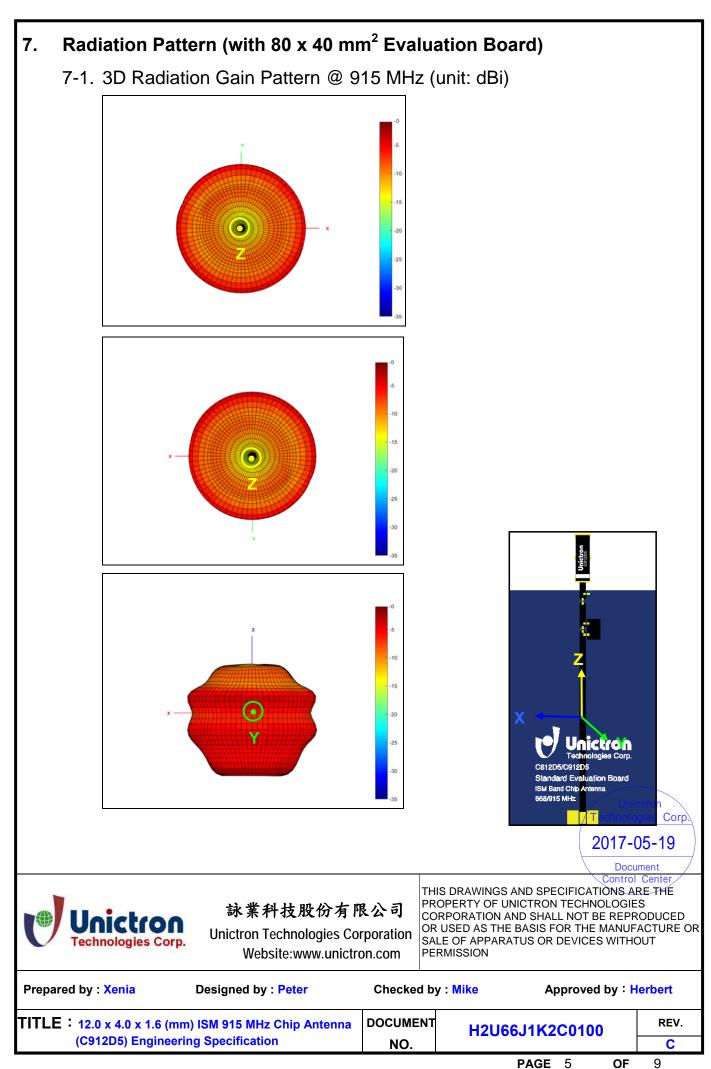

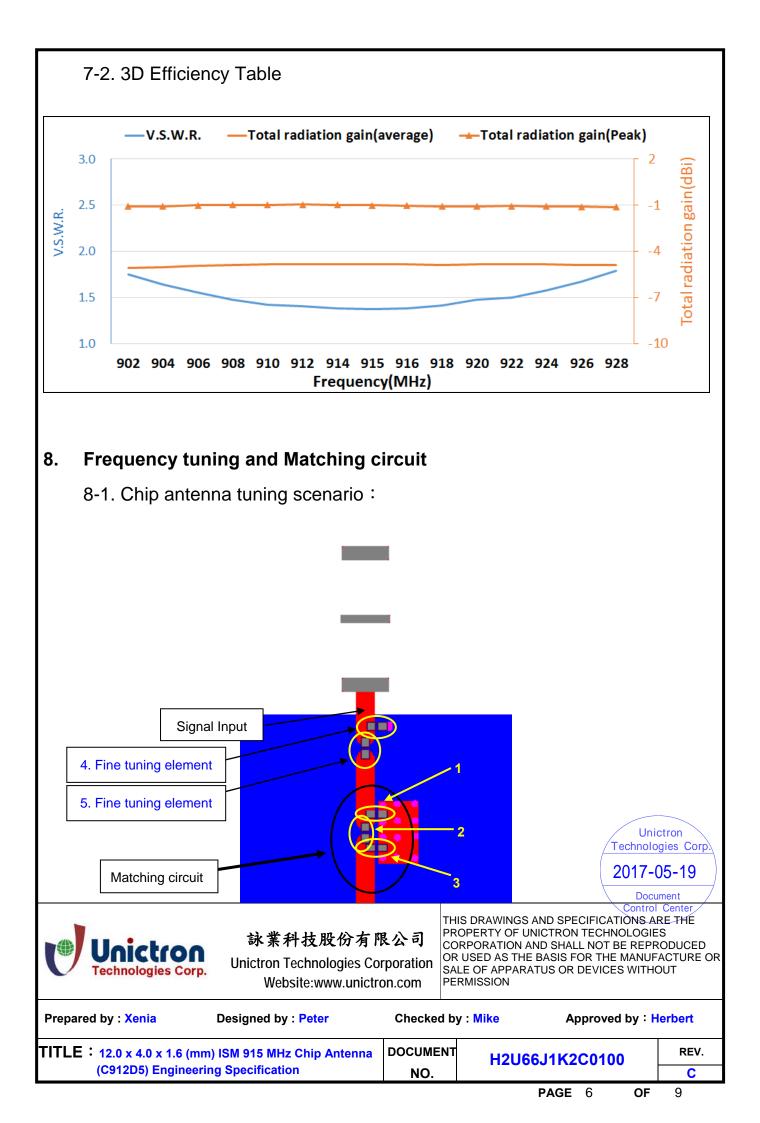

8-2. Matching circuit :


With the following recommended values of matching and tuning components, the center frequencies will be about 915 MHz at our standard 80 x 40 mm² evaluation board. However, these are typical reference values which may need to be changed when circuit boards or part vendors are different.

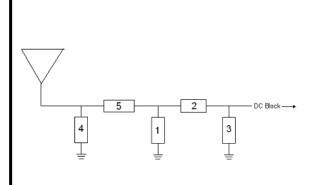

System Matching Circuit Component				
Location	Description	Vendor	Tolerance	
1	6.8nH, (0402)	MURATA	±3%	
2	1.5nH, (0402)	MURATA	±0.1nH	
3	N/A	-	-	
4 Fine tuning element	0.4pF, (0402)	MURATA	±0.05pF	
5 Fine tuning element	10nH, (0402)	MURATA	±5%	

9. **Soldering Conditions**

Typical Soldering Profile for Lead-free Process

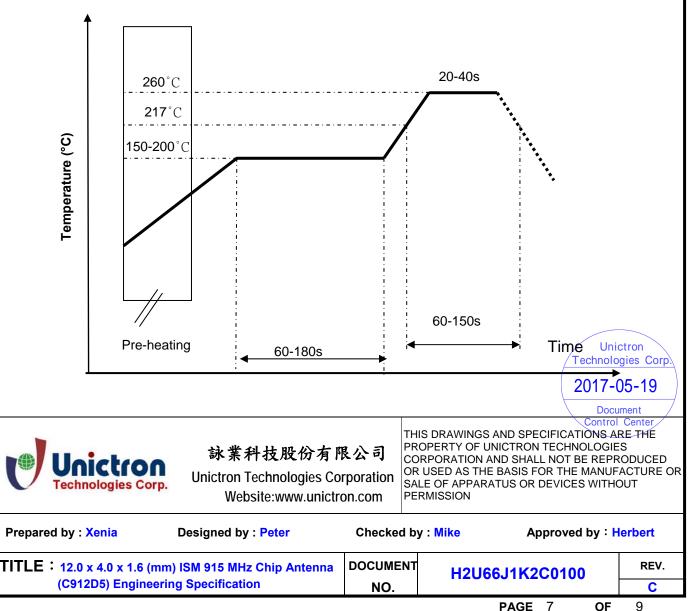


10. Packing

- (1) Quantity/Reel: 3500 pcs/Reel
- (2) Plastic tape: Black Conductive Polystyrene.

a. Tape Drawing

b. Tape Dimensions (unit: mm)

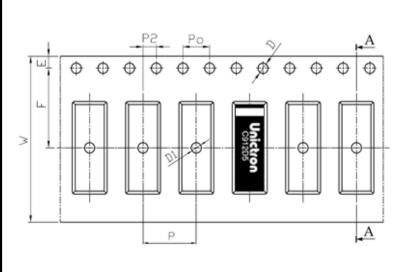

Feature	Specification	Tolerance
	S	S
W	24.00	±0.30
Р	8.00	±0.10
E	1.75	±0.10
F	11.50	±0.10
P2	2.00	±0.10
	1.50	+0.10
	1.50	-0.00
D1	1.50	±0.10
Po	4.00	±0.10
10Po	40.00	±0.20

11. Operating & Storage Conditions

- 11-1. Operating
 - (1) Maximum Input Power: 2 W
 - (2) Operating Temperature: -40 $^\circ\!\mathrm{C}$ to 85 $^\circ\!\mathrm{C}$
 - (3) Relative Humidity: 10% to 70%

11-2. Storage (sealed)

- (1) Storage Temperature: -5°C to 40°C
- (2) Relative Humidity: 20% to 70%
- (3) Shelf Life: 1 year

11-3. Storage (unsealed)

Meet the criteria of <u>J-STD-033 MSL2a</u>

11-4. Storage (After mounted on customer's PCB with SMT process)

- (1) Storage Temperature: -40 $^\circ\!\mathrm{C}$ to 85 $^\circ\!\mathrm{C}$
- (2) Relative Humidity: 10% to 70%



2017-05-19

9

12. Notice

(1) Installation Guide:

Please refer to Unictron's application note "General guidelines for the installation of Unictron's chip antennas" for further information.

(2) All specifications are subject to change without notice.

