


UMEC International Corporation

UP0651S SERIES

65 Watt Open Frame Switchers

- ◆ Small Size 3"X 5" Footprint
- ◆ Universal Input 90 to 264 VAC
- ◆ EMI Meets FCC/CISPR 22 Class B
- ◆ MTBF 210Khrs
- ◆ RoHS Compliant

Green Product
RoHS

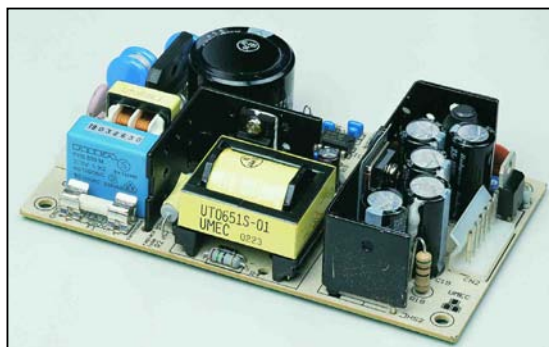

SPECIFICATIONS

All specifications are typical at nominal line, full load and 25°C unless otherwise noted.

INPUT SPECIFICATIONS

Input Voltage Range 90-264VAC
Input Frequency 47-63 Hz
Inrush Current 40A max.(Cold Start)
Line Regulation¹ ±0.5%

GENERAL SPECIFICATIONS

Hold-up Time 16mS typ.
Efficiency 75% typ.
Leakage Current 3mA max.
Short Circuit Protection Continuous
Overvoltage Protection All models
Overload Protection..... 120-200% of rated value
Continuous Output Power 65W max.
Hi-Pot Isolation..... 4242 VDC

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature Range 0°C to 70°C
Derating 50°C to 70°C 2%/°C
Temperature Coefficient ±0.02%/°C
Storage Temperature Range -40°C to +85°C
Humidity, Non-Condensing 0 to 95% RH
Cooling Free- Air Convection
EMI Meets FCC/CISPR 22 Class B Specification

NOTES:

1. Measured from 90 to 264 VAC.



UMEC International Corporation
2539 West 237th Street, Suite A
Torrance, California 90505 USA

www.umecintl.com
Tel: 310-326-7072
Fax: 310-326-7058

UMEC International Corporation

OUTPUT SPECIFICATIONS

Model Number	Output ¹ Voltage (Volts)	Output Current (Amps)		Peak ² (Amps)	Ripple ³ P-P (mV)	Load Regulation ⁴ Load Change 0-100%	Output voltage polarity
		Min.	Rated				
UP0651S-01	5	0.0	12	14.0	50	±0.5%	Output may be referenced positive or negative
UP0651S-02	12	0.0	5.4	6.5	120	±0.5%	
UP0651S-03	15	0.0	4.3	5.2	150	±0.5%	
UP0651S-04	24	0.0	2.7	3.7	240	±0.5%	
UP0651S-10	48	0.0	1.35	1.62	480	±0.5%	


NOTES

- The output voltage is set to ±1%, with all the outputs at rated load. And the adjustable range is ±5%.
- Peak output current lasting less than one minute with duty factor less than 5%. During peak loading voltage may exceed regulation limits.
- Add a 0.1uF ceramic capacitor and a 47uF E.L. capacitor to the output cable. Peak to peak and RMS metering equipment shall have a 20 MHz response with probes and cables maintaining frequency response from 200 Hz to 100MHz bandwidth. Output ripple and spikes are measured directly at the output terminals of the power supply without the use of the probe ground clip.
- Load regulation is measured at 115VAC or 230VAC input, and by varying the load from 0% to 100% of rated load.
- Replace input line fuse with same type rating. Recommended 3A/250 VAC or 3.15A/250VAC time lag fuse.

PHYSICAL SPECIFICATIONS

Weight: 265g

MECHANICAL OUTPUT AND PIN CONNECTION

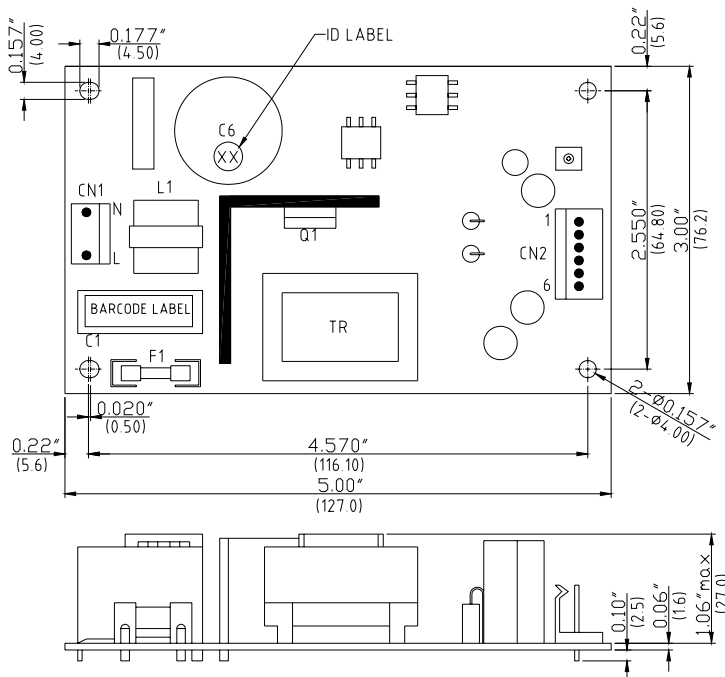

CN1 input connector Molex 09-65-2058 with second pin removed	
Pin	Input voltage
L&N	90-264 VAC
Molex mating connector Molex 5195 series Housing with 5194 series crimp terminals	

CN2 output connector Molex pin 09-65-2068	
Model	
Pin	UP0651S-XX
1	Vo
2	
3	
4	Common
5	
6	
Molex mating connector Molex 5195 series Housing with 5194 series crimp terminals	

CN3 input ground tab, tab size 4.8*0.5(mm) With receptacle for 4.8*0.5(mm) tab

NOTES

- All dimensions in inches (mm).
- Tolerance .XX=±0.05", .XXX=±0.020"



UMEC International Corporation
2539 West 237th Street, Suite A
Torrance, California 90505 USA

www.umecintl.com
Tel: 310-326-7072
Fax: 310-326-7058