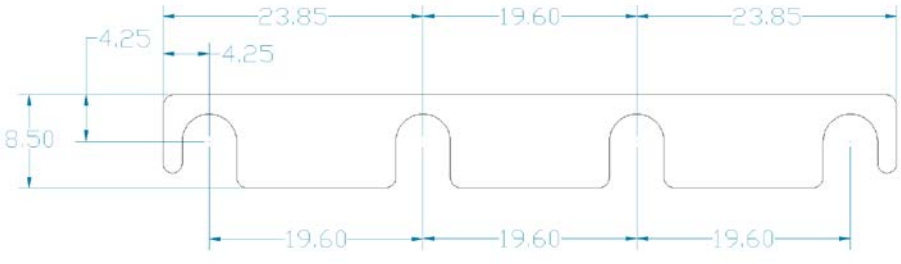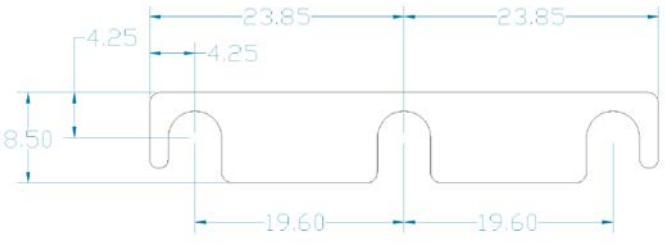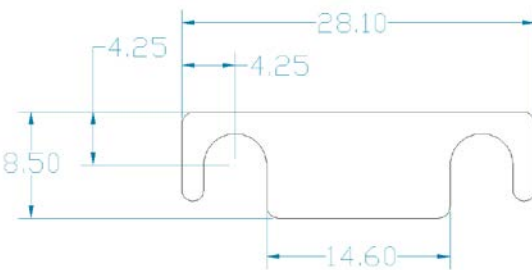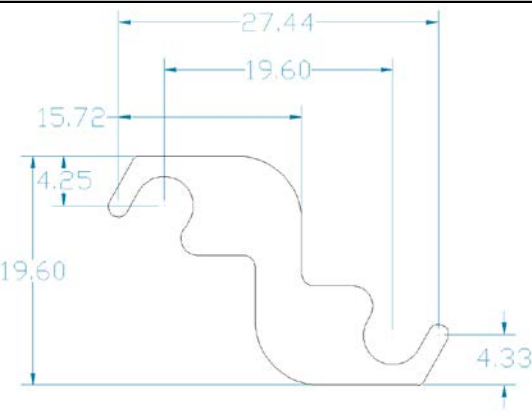## PARRALEL LINKS – Use same link for both positive and negative connections

Specification	Par4 Link
M4 Screws – Tighten to 0.55NM	
Copper – Tin Plated	

	Par3 Link

	Par2 Link

SERIE LINK

Specification	Series Link
M4 Screws – Tighten to 0.55NM	
Copper – Tin Plated	

Notes: Refer to the User Manual and datasheets for information on how to connect modules in parallel or in series.

VCCM Parallel or Series link Datasheet | DOC6052r00 | Release date 20/10/2016

Vox Power Limited | Unit 2, Red Cow Interchange Estate, Ballymount, Dublin 22, D22 Y8H2, Ireland | T +353 1 4591161 | www.vox-power.com