




LU 10.16/90

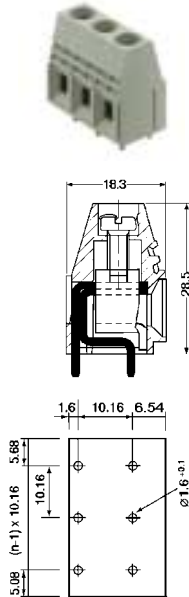

| Technical data | VDE | UL | CSA |
|----------------------------------|------|--------|--------|
| Rated voltage (V) | 630* | 300 | 300 |
| Rated current (A) | 57 | 65 | 50 |
| Wire size (mm ² /AWG) | 16.0 | 26...6 | 22...8 |

*Pollution severity 3 / Overvoltage category III
Additional technical data see page 65

Solder pin length



4.5 mm

Color

| Poles | Type | Part No. | Qty. |
|-------|----------------------|------------|------|
| 2 | LU 10.16/2/90 2 PIN | 1648310000 | 20 |
| 3 | LU 10.16/3/90 2 PIN | 1648300000 | 20 |
| 4 | LU 10.16/4/90 2 PIN | 995639 | |
| 5 | LU 10.16/5/90 2 PIN | 995640 | |
| 6 | LU 10.16/6/90 2 PIN | 995641 | |
| 7 | LU 10.16/7/90 2 PIN | 995642 | |
| 8 | LU 10.16/8/90 2 PIN | 995643 | |
| 9 | LU 10.16/9/90 2 PIN | 995644 | |
| 10 | LU 10.16/10/90 2 PIN | 995645 | |

| Accessories | Page |
|---------------|--------|
| Marking | 40, 42 |
| Mounting | - |
| Miscellaneous | 45 |

LU 10.16/90

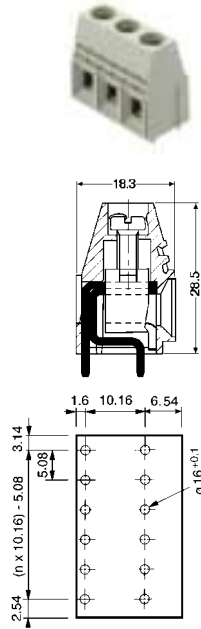

| Technical data | VDE | UL | CSA |
|----------------------------------|------|--------|--------|
| Rated voltage (V) | 250* | 300 | 300 |
| Rated current (A) | 57 | 65 | 50 |
| Wire size (mm ² /AWG) | 16.0 | 26...6 | 22...8 |

*Pollution severity 3 / Overvoltage category III
Additional technical data see page 65

Solder pin length



4.5 mm

Color

| Poles | Type | Part No. | Qty. |
|-------|----------------------|------------|------|
| 2 | LU 10.16/2/90 4 PIN | 1636170000 | 20 |
| 3 | LU 10.16/3/90 4 PIN | 1636180000 | 20 |
| 4 | LU 10.16/4/90 4 PIN | 995419 | |
| 5 | LU 10.16/5/90 4 PIN | 995420 | |
| 6 | LU 10.16/6/90 4 PIN | 995421 | |
| 7 | LU 10.16/7/90 4 PIN | 995422 | |
| 8 | LU 10.16/8/90 4 PIN | 995423 | |
| 9 | LU 10.16/9/90 4 PIN | 995424 | |
| 10 | LU 10.16/10/90 4 PIN | 995425 | |

| Accessories | Page |
|---------------|--------|
| Marking | 40, 42 |
| Mounting | - |
| Miscellaneous | 45 |

LX 15.00/90

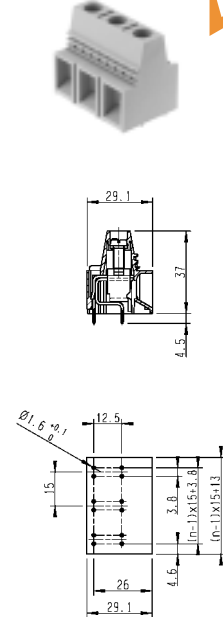

| Technical data | VDE | UL | CSA |
|----------------------------------|------|--------|-----|
| Rated voltage (V) | 800* | 600 | 600 |
| Rated current (A) | 101 | 85 | 85 |
| Wire size (mm ² /AWG) | 25.0 | 16...4 | 4 |

*Pollution severity 3 / Overvoltage category III
Additional technical data see page 64

Solder pin length

4.5 mm

4 solder pins per pole

Color

| Poles | Type | Part No. | Qty. |
|-------|---------------|------------|------|
| 1 | LX 15.00/1/90 | 1783660000 | 20 |
| 2 | LX 15.00/2/90 | 1783670000 | 20 |
| 3 | LX 15.00/3/90 | 1783680000 | 20 |
| 4 | LX 15.00/4/90 | 1783690000 | 20 |
| 5 | LX 15.00/5/90 | on request | 20 |
| 6 | LX 15.00/6/90 | on request | 10 |
| 7 | LX 15.00/7/90 | on request | 10 |
| 8 | LX 15.00/8/90 | on request | 10 |

| Accessories | Page |
|---------------|------|
| Marking | 40 |
| Mounting | - |
| Miscellaneous | 45 |

